



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
NOVA BUS 169
Component
Rear Transmission (Auto)

Fluid
CASTROL TRANSYND (--- GAL)

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0889112	WC0866431	WC0816379
Sample Date		Client Info		08 Jan 2024	21 Nov 2023	27 Sep 2023
Machine Age	kms	Client Info		0	0	0
Oil Age	kms	Client Info		28088	18764	9760
Filter Age	kms	Client Info		28088	18764	9760
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>230	48	42	35
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	0	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>65	10	8	7
Lead	ppm	ASTM D5185(m)	>55	1	1	1
Copper	ppm	ASTM D5185(m)	>85	7	6	6
Tin	ppm	ASTM D5185(m)	>5	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION











There is a moderate amount of silt (particulates < 14 microns in size) present in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	6	5	4
Potassium	ppm	ASTM D5185(m)	>20	1	<1	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>10000	▲ 75030	▲ 66685	---
Particles >6µm		ASTM D7647	>2500	▲ 12933	▲ 16914	---
Particles >14µm		ASTM D7647	>320	94	299	---
Particles >21µm		ASTM D7647	>80	11	34	---
Particles >38µm		ASTM D7647	>20	4	1	---
Particles >71µm		ASTM D7647	>4	1	0	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	▲ 23/21/14	▲ 23/21/15	---
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The fluid is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Sodium	ppm	ASTM D5185(m)		4	4	4
Boron	ppm	ASTM D5185(m)	150	74	77	77
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	0	1	<1	<1
Calcium	ppm	ASTM D5185(m)	40	125	124	124
Phosphorus	ppm	ASTM D5185(m)	320	243	243	241
Zinc	ppm	ASTM D5185(m)	5	4	4	4
Sulfur	ppm	ASTM D5185(m)	1050	1618	1513	1529
Acid Number (AN)	mg KOH/g	ASTM D974*	1.0	1.07	1.33	1.38
Visc @ 40°C	cSt	ASTM D7279(m)	38.9	33.1	33.2	33.2
Visc @ 100°C	cSt	ASTM D7279(m)	7.3	6.6	6.6	6.6
Viscosity Index (VI)	Scale	ASTM D2270*	168	159	158	158

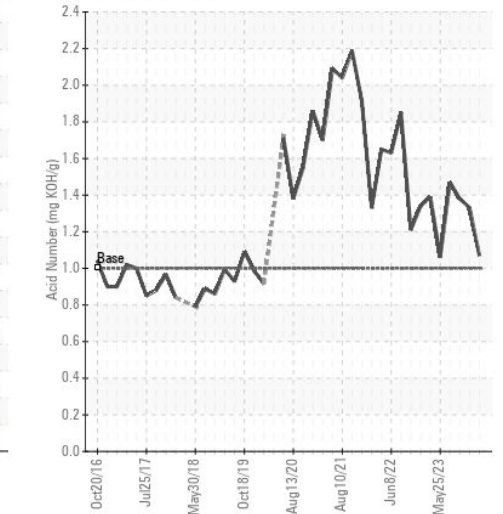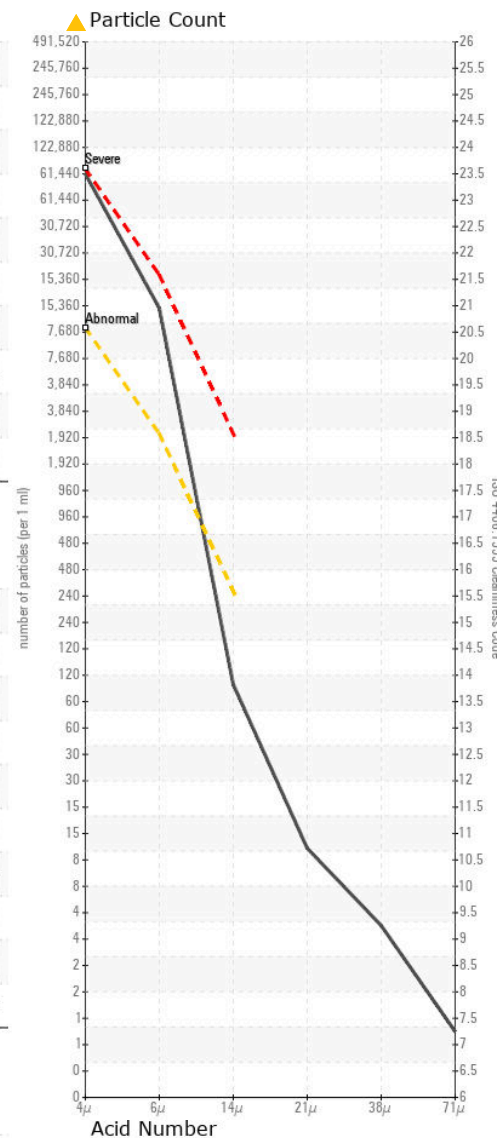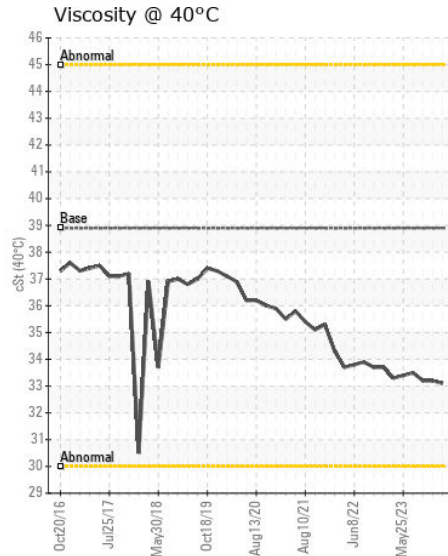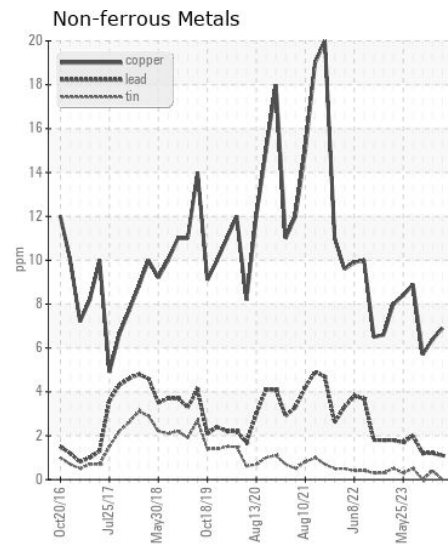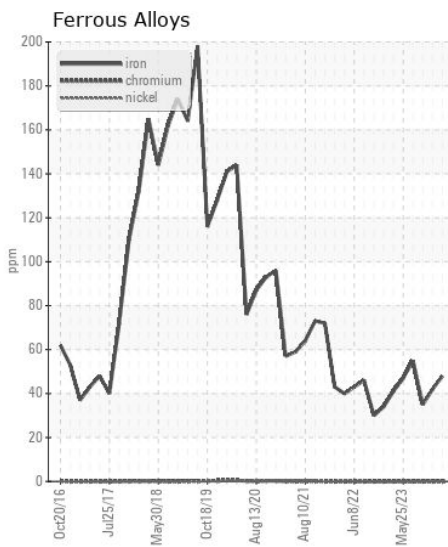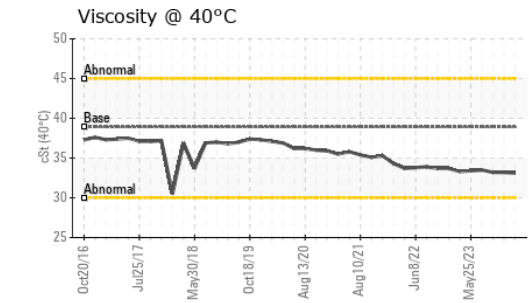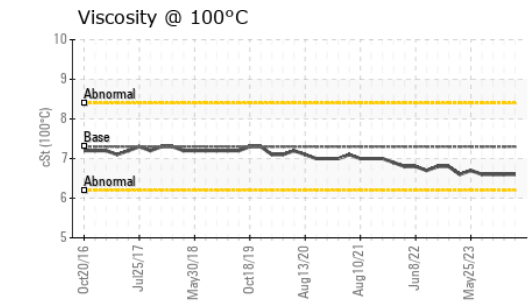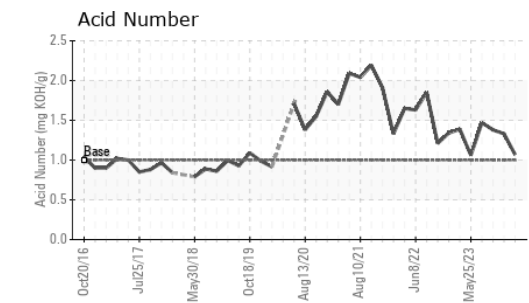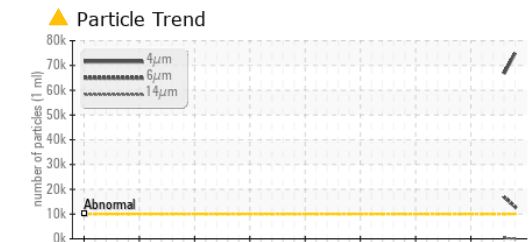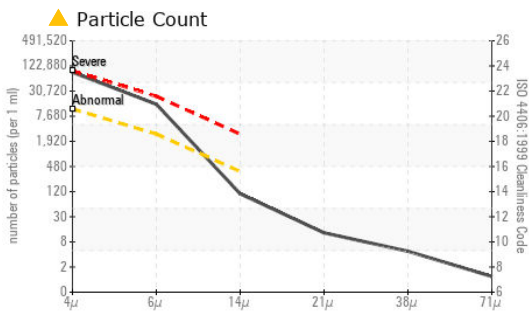

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0889112 **Received** : 12 Jan 2024
Lab Number : 02608600 **Diagnosed** : 16 Jan 2024
Unique Number : 5709686 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, PrtCount, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

CITY OF THUNDER BAY
 AUTO MAINTENANCE STORES, 570 FORT WILLIAM ROAD
 THUNDER BAY, ON
 CA P7B 2Z8
 Contact: Sean Malcolm
 sean.malcolm@thunderbay.ca
 T: (807)684-2716
 F: (807)344-0237