



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 202-2100
Component
Rear Left Planetary
Fluid
SAE 75W140 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0084928	---	---
Sample Date		Client Info		10 Jan 2024	---	---
Machine Age	hrs	Client Info		2695	---	---
Oil Age	hrs	Client Info		2695	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	98	---	---
Chromium	ppm	ASTM D5185(m)	>10	1	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<1	---	---
Lead	ppm	ASTM D5185(m)	>25	<1	---	---
Copper	ppm	ASTM D5185(m)	>75	11	---	---
Tin	ppm	ASTM D5185(m)	>10	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	HAZY	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	---	---
Boron	ppm	ASTM D5185(m)		65	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		2	---	---
Magnesium	ppm	ASTM D5185(m)		2	---	---
Calcium	ppm	ASTM D5185(m)		14	---	---
Phosphorus	ppm	ASTM D5185(m)		1066	---	---
Zinc	ppm	ASTM D5185(m)		31	---	---
Sulfur	ppm	ASTM D5185(m)		19832	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	190	163	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	25.0	22.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	163	166	---	---

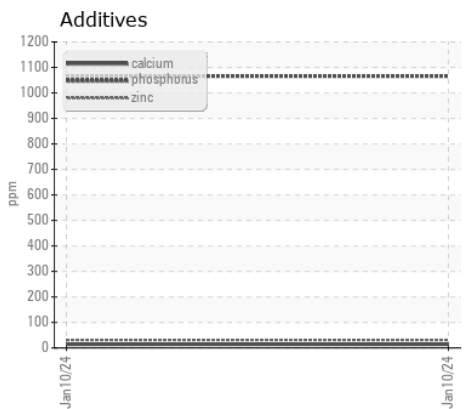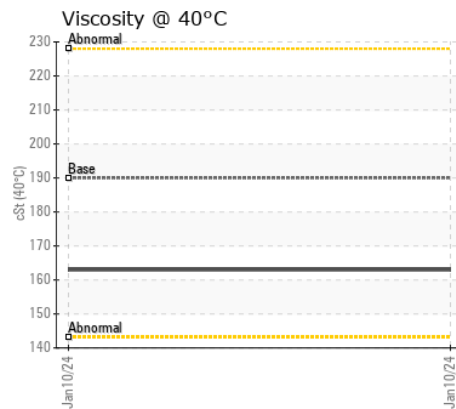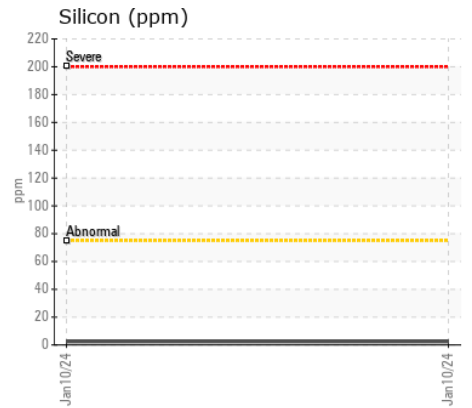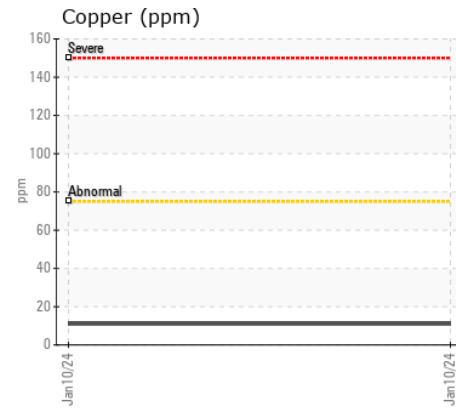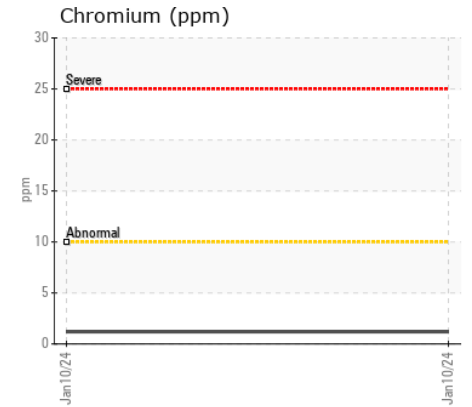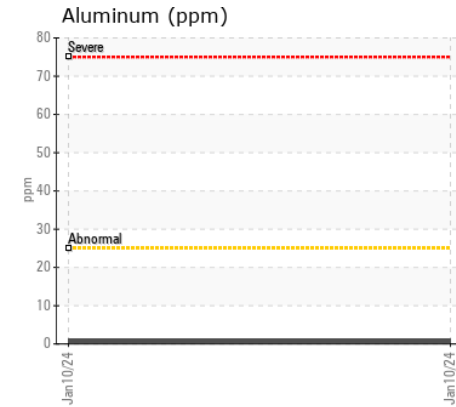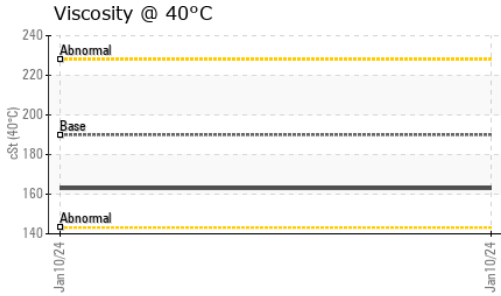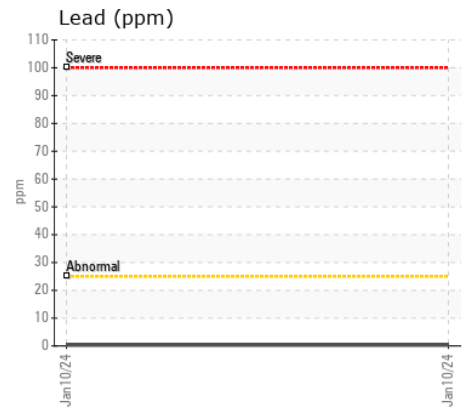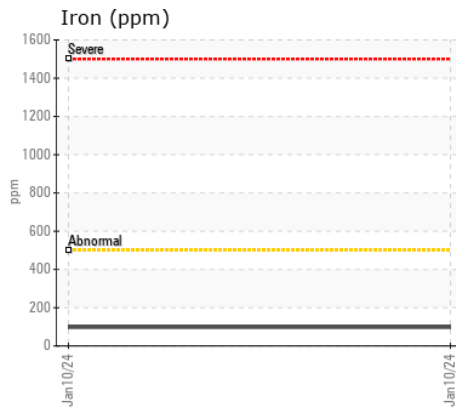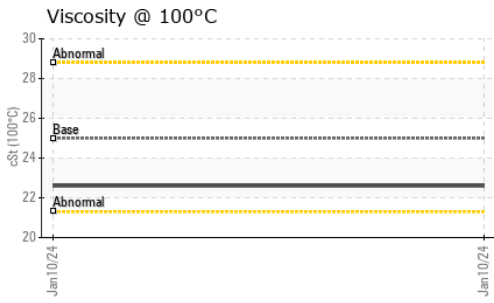

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
 Sample No. : PC0084928 Recieved : 12 Jan 2024
 Lab Number : 02608606 Diagnosed : 14 Jan 2024
 Unique Number : 5709692 Diagnostician : Kevin Marson
 Test Package : MOB 1 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

LAVIS CONTRACTING
 37462A HURON ROAD
 CLINTON, ON
 CA N0M 1L0
 Contact: Doug Francis
 dfrancis@lavis.ca
 T: (519)482-3694
 F: (519)482-7886