



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR L586 048529-1334**  
Component  
**Front Differential**  
Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

### RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0163402</b>	LH0227147	LH0202379
Sample Date		Client Info		<b>19 Dec 2023</b>	10 Mar 2022	05 Oct 2021
Machine Age	hrs	Client Info		<b>3763</b>	0	3567
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>None</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>1500	<b>96</b>	136	92
Chromium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	3	<1
Lead	ppm	ASTM D5185(m)	>5	<b>2</b>	2	2
Copper	ppm	ASTM D5185(m)	>200	<b>55</b>	71	85
Tin	ppm	ASTM D5185(m)	>10	<b>3</b>	4	3
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	VLITE	VLITE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>60	<b>4</b>	3	5
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>VLITE</b>	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		<b>3</b>	4	3
Boron	ppm	ASTM D5185(m)	0	<b>2</b>	<1	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	0	<b>2</b>	6	5
Magnesium	ppm	ASTM D5185(m)	<1	<b>1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)	<1	<b>9</b>	15	6
Phosphorus	ppm	ASTM D5185(m)	2143	<b>2264</b>	2393	2418
Zinc	ppm	ASTM D5185(m)	<1	<b>21</b>	27	39
Sulfur	ppm	ASTM D5185(m)	23468	<b>25459</b>	24131	26074
Visc @ 40°C	cSt	ASTM D7279(m)	170	<b>188</b>	190	192

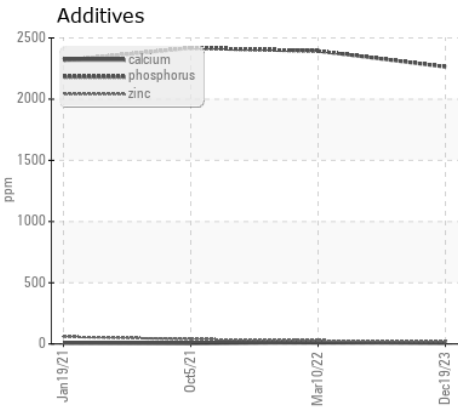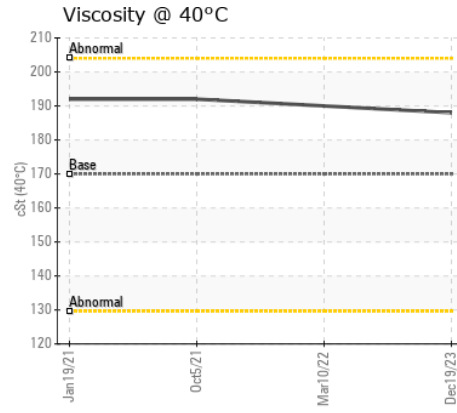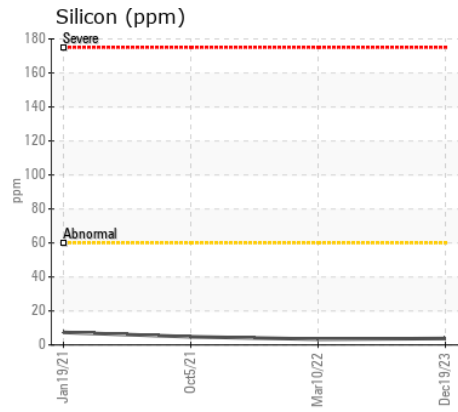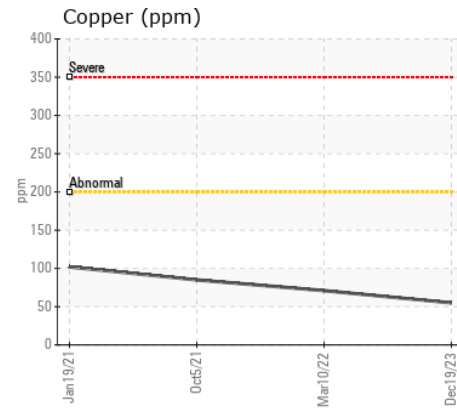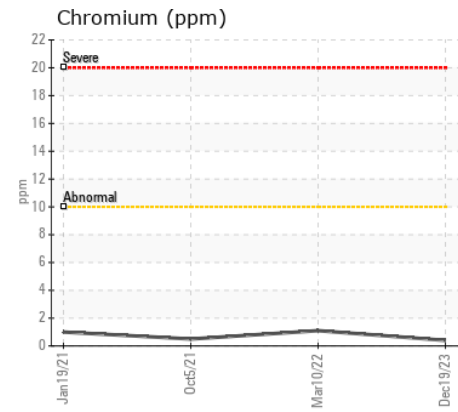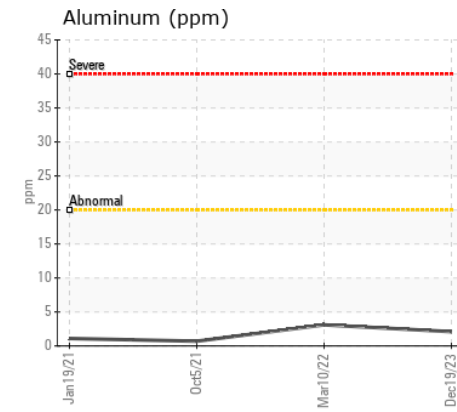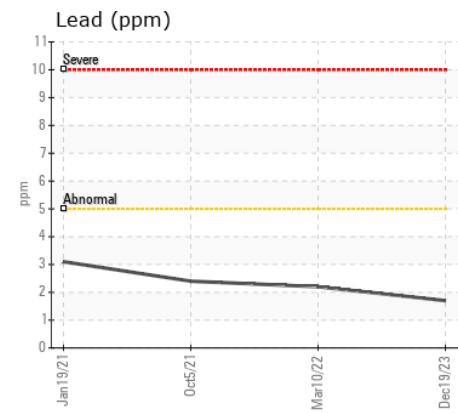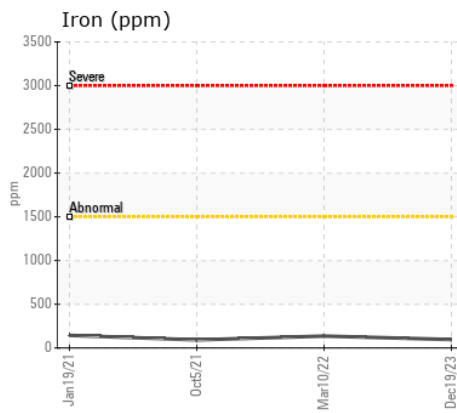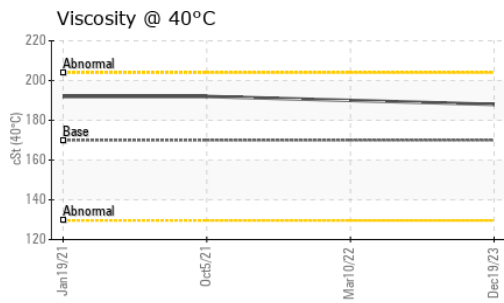

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0163402 **Received** : 12 Jan 2024  
**Lab Number** : 02608609 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 5709695 **Diagnostician** : Wes Davis  
**Test Package** : MOBCE ( Additional Tests: Visual )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**GABRIEL AUBE INC**  
 195 3E AVENUE E  
 LA SARRE, QC  
 CA J9Z 2K6  
 Contact: Richard Plurde  
 richard@gabrielaubeinc.ca  
 T: (819)333-2460  
 F: