



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH22M 136874-1250

Component
Swing Drive

Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH	LH0249965	---
Sample Date		Client Info		05 Jan 2024	25 Jan 2023	---
Machine Age	hrs	Client Info		1000	500	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		None	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>350	88	226	---
Chromium	ppm	ASTM D5185(m)	>15	<1	2	---
Nickel	ppm	ASTM D5185(m)	>5	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	<1	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	---
Lead	ppm	ASTM D5185(m)	>10	<1	1	---
Copper	ppm	ASTM D5185(m)	>300	31	43	---
Tin	ppm	ASTM D5185(m)	>15	<1	1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>15	1	2	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		2	6	---
Boron	ppm	ASTM D5185(m)	0	9	3	---
Barium	ppm	ASTM D5185(m)	0	<1	4	---
Molybdenum	ppm	ASTM D5185(m)	0	0	<1	---
Manganese	ppm	ASTM D5185(m)	0	<1	3	---
Magnesium	ppm	ASTM D5185(m)	<1	<1	4	---
Calcium	ppm	ASTM D5185(m)	<1	12	45	---
Phosphorus	ppm	ASTM D5185(m)	2143	2212	2421	---
Zinc	ppm	ASTM D5185(m)	<1	14	31	---
Sulfur	ppm	ASTM D5185(m)	23468	24795	33998	---
Visc @ 40°C	cSt	ASTM D7279(m)	170	184	178	---

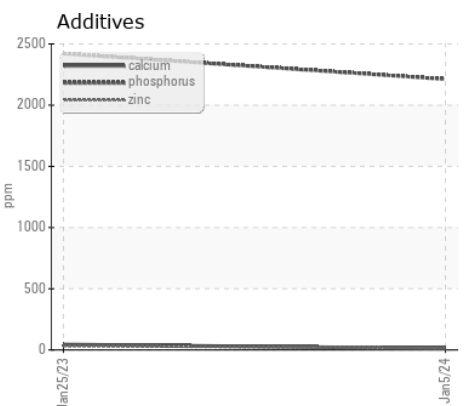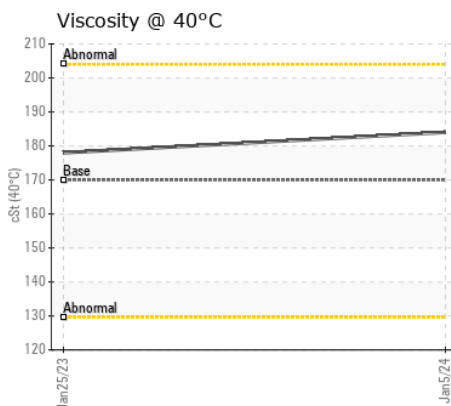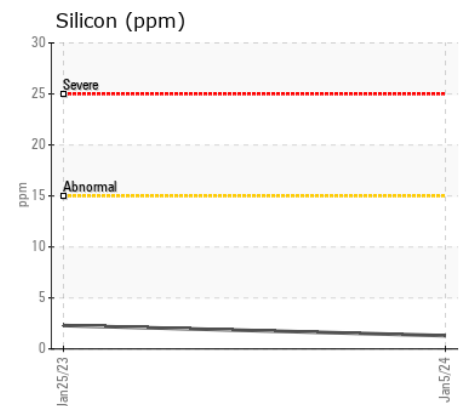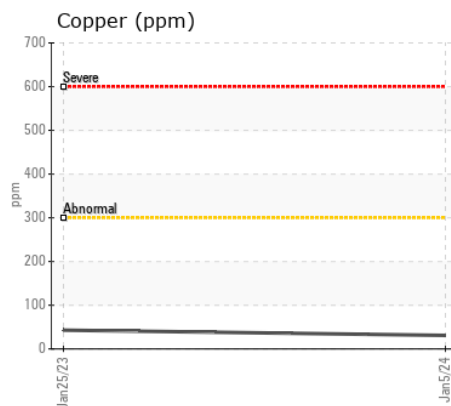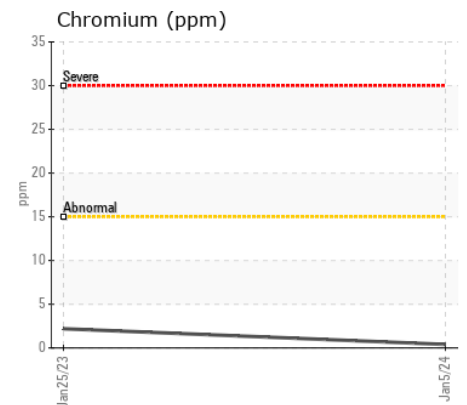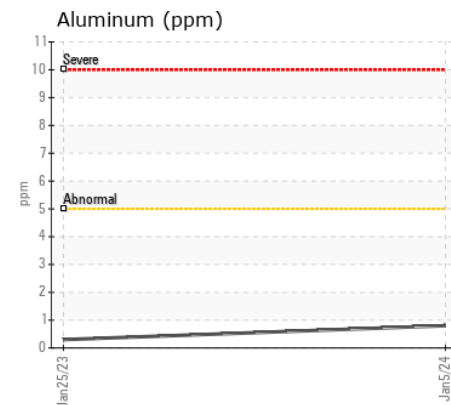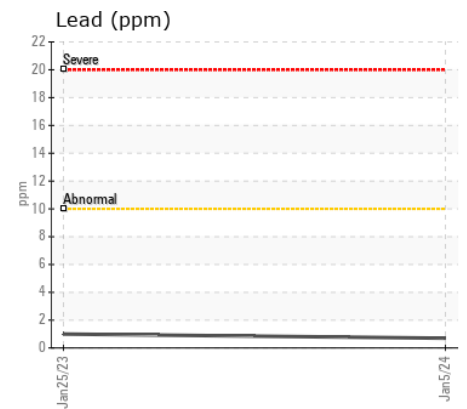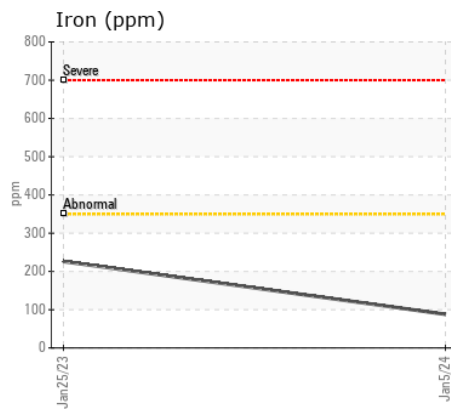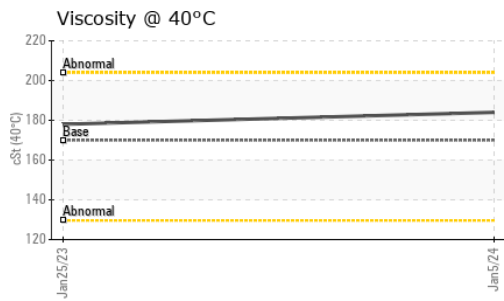

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 LA REGIE DES MATIERES RESIDUELLES DU LAC ST-JEAN
Sample No. : LH **Recieved** : 12 Jan 2024 **625 RUE BERGERON OUEST**
Lab Number : 02608622 **Diagnosed** : 12 Jan 2024 **ALMA, QC**
Unique Number : 5709708 **Diagnostician** : Wes Davis **CA G8B 1V3**
Test Package : MOB 1 **Contact: Service Manager**

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: