



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 3406
Component
Diesel Engine
Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0073116	---	---
Sample Date		Client Info		02 Jan 2024	---	---
Machine Age	hrs	Client Info		9918	---	---
Oil Age	hrs	Client Info		100	---	---
Filter Age	hrs	Client Info		100	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>86	11	---	---
Chromium	ppm	ASTM D5185(m)	>3	<1	---	---
Nickel	ppm	ASTM D5185(m)	>3	<1	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>15	1	---	---
Lead	ppm	ASTM D5185(m)	>16	1	---	---
Copper	ppm	ASTM D5185(m)	>250	2	---	---
Tin	ppm	ASTM D5185(m)	>2	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>35	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	7.1	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.0	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	0	5	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	60	58	---	---
Manganese	ppm	ASTM D5185(m)	0	0	---	---
Magnesium	ppm	ASTM D5185(m)	1010	939	---	---
Calcium	ppm	ASTM D5185(m)	1070	1030	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	1008	---	---
Zinc	ppm	ASTM D5185(m)	1270	1128	---	---
Sulfur	ppm	ASTM D5185(m)	2060	2658	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.7	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	107	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	14.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	139	140	---	---

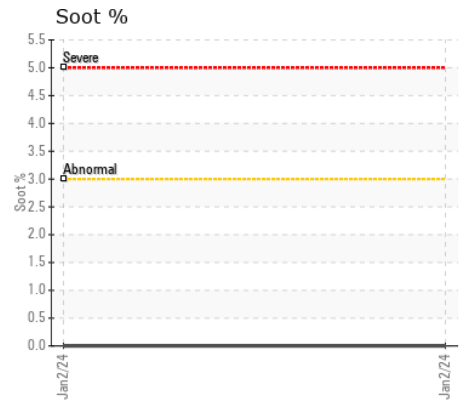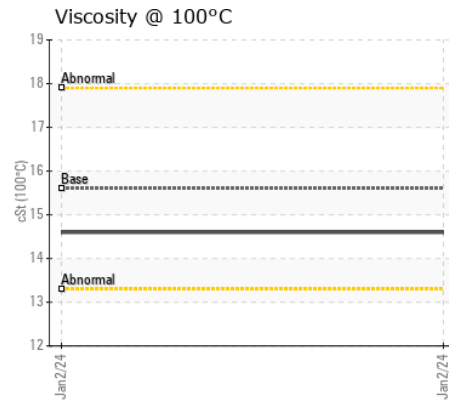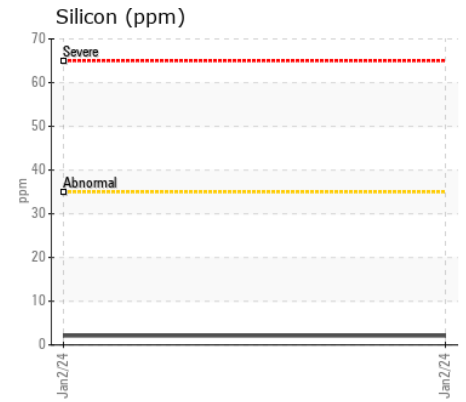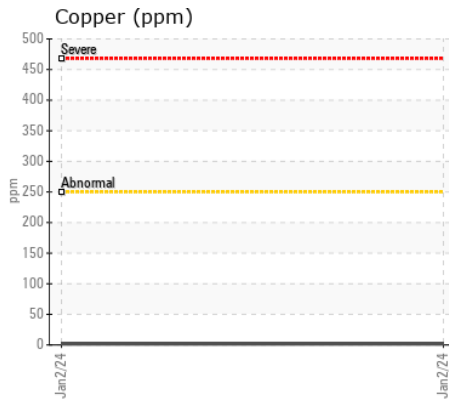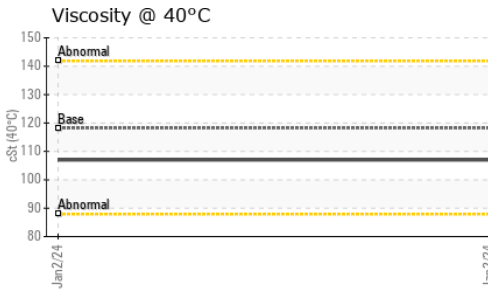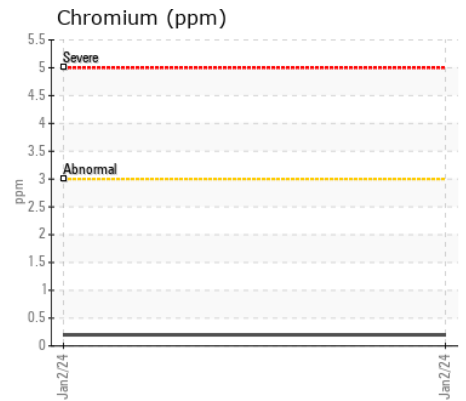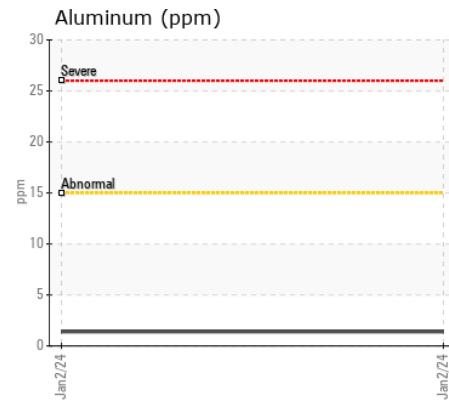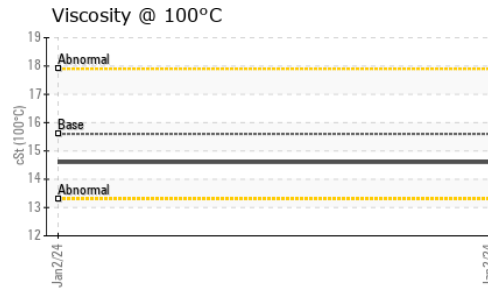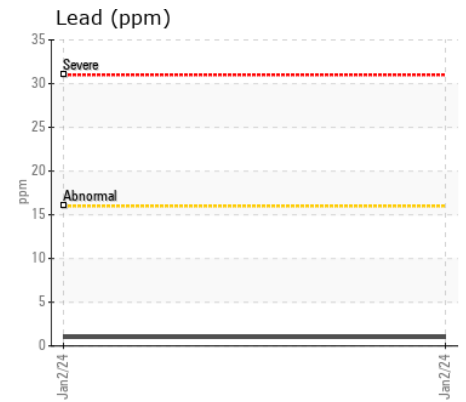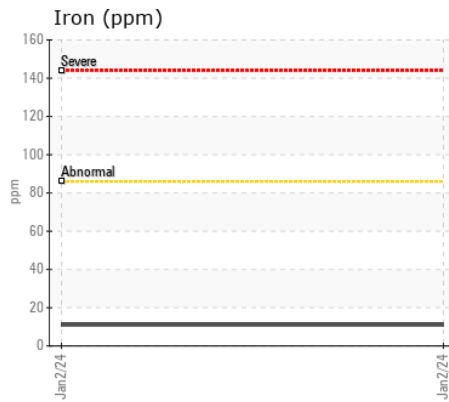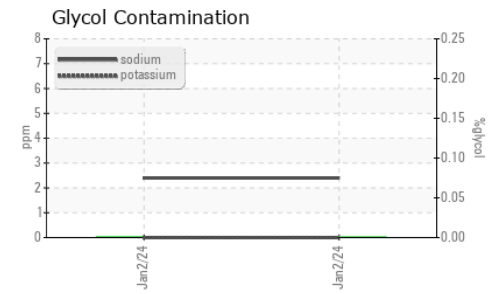

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0073116 **Received** : 15 Jan 2024
Lab Number : 02608664 **Diagnosed** : 15 Jan 2024
Unique Number : 5709750 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: Glycol, KV40, VI)

GOLDSRING FARMING CO LTD
 BOX 158
 WARNER, AB
 CA T0K 2L0
 Contact: Service Manager
 mechanic@gscolony.com
 T: (581)787-1890
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.