



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50 14791
Component
Front Differential
Fluid
CHEVRON DELO GEAR ESI OIL 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH	LH0260759	---
Sample Date		Client Info		27 Dec 2023	16 Oct 2023	---
Machine Age	hrs	Client Info		22000	21000	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>190	4	11	---
Chromium	ppm	ASTM D5185(m)	>2	0	0	---
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	<1	---
Aluminum	ppm	ASTM D5185(m)	>5	<1	1	---
Lead	ppm	ASTM D5185(m)	>15	0	0	---
Copper	ppm	ASTM D5185(m)	>70	<1	2	---
Tin	ppm	ASTM D5185(m)	>2	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	2	8	---
Potassium	ppm	ASTM D5185(m)	>20	1	<1	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	VLITE	---
Debris	scalar	Visual*	NONE	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	2	---
Boron	ppm	ASTM D5185(m)	15	291	308	---
Barium	ppm	ASTM D5185(m)	0	0	<1	---
Molybdenum	ppm	ASTM D5185(m)	0	2	1	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)	0	4	4	---
Calcium	ppm	ASTM D5185(m)	5	31	22	---
Phosphorus	ppm	ASTM D5185(m)	600	1664	1706	---
Zinc	ppm	ASTM D5185(m)	0	15	13	---
Sulfur	ppm	ASTM D5185(m)	22000	18685	19089	---
Visc @ 40°C	cSt	ASTM D7279(m)	140	130	129	---

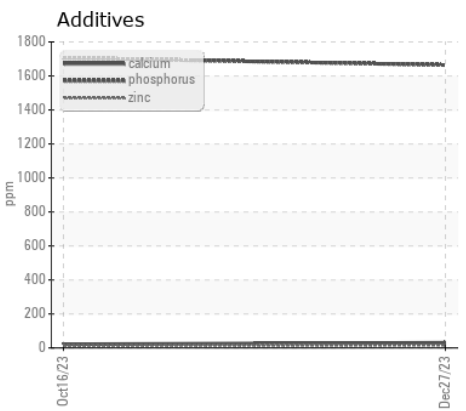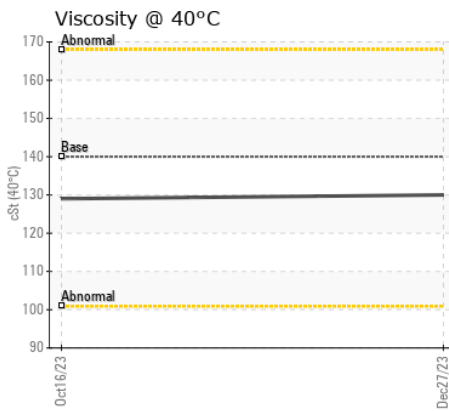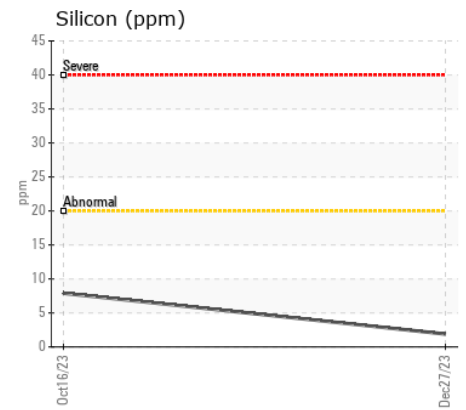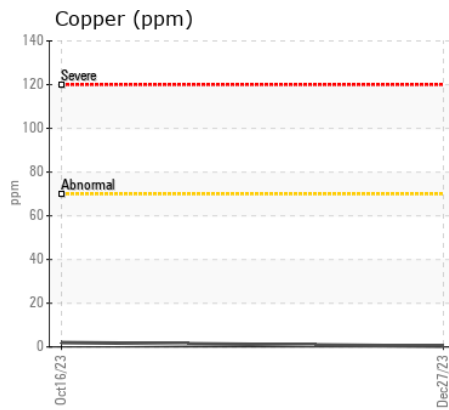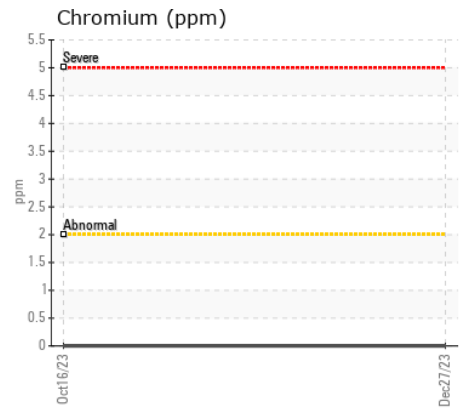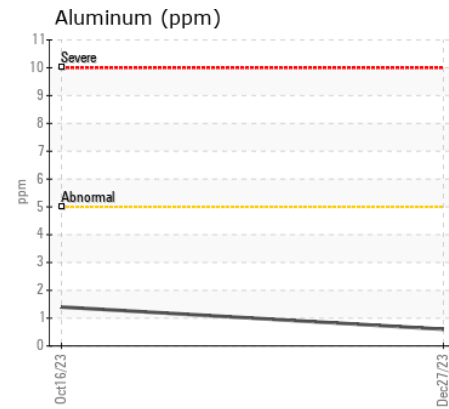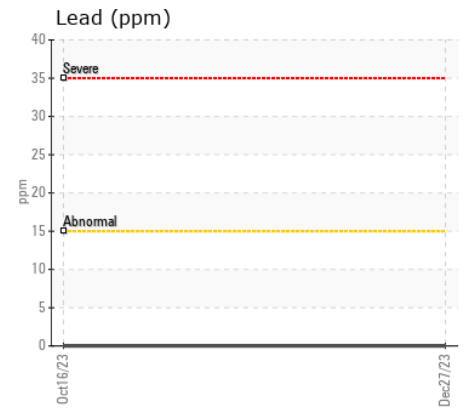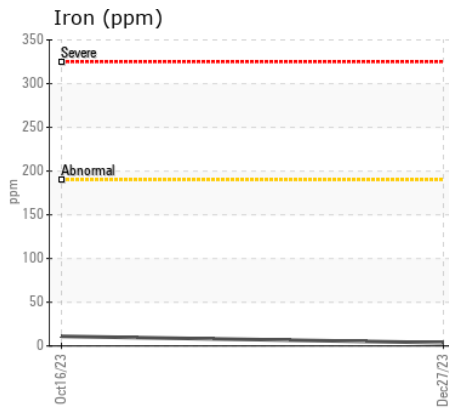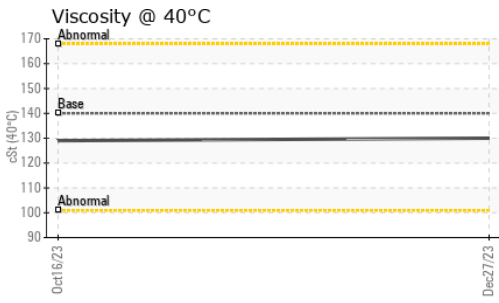

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH **Recieved** : 15 Jan 2024
Lab Number : 02608775 **Diagnosed** : 15 Jan 2024
Unique Number : 5709861 **Diagnostician** : Wes Davis
Test Package : MOB 1

INTERFOR CORP
 5060 RTE 430
 BRUNSWICK MINE, NB
 CA E2A 6W6
 Contact: Daniel Hachey
 daniel.hachey@interfor.com
 T: (506)547-8700
 F: (506)548-1892

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.