



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR LH50 14791**

Component  
**Splitter Box**

Fluid  
**CHEVRON DELO GEAR ESI OIL 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH</b>	LH	LH0269533
Sample Date		Client Info		<b>09 Jan 2024</b>	27 Dec 2023	10 Oct 2023
Machine Age	hrs	Client Info		<b>16000</b>	22000	21000
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>19</b>	26	17
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	4	2
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<b>7</b>	16	8
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	2	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	1	1
Boron	ppm	ASTM D5185(m)	15	<b>306</b>	251	273
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	0	<b>6</b>	2	3
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	0	<b>6</b>	6	6
Calcium	ppm	ASTM D5185(m)	5	<b>20</b>	45	39
Phosphorus	ppm	ASTM D5185(m)	600	<b>1749</b>	1473	1529
Zinc	ppm	ASTM D5185(m)	0	<b>11</b>	77	61
Sulfur	ppm	ASTM D5185(m)	22000	<b>19033</b>	16234	17134
Visc @ 40°C	cSt	ASTM D7279(m)	140	<b>128</b>	106	112

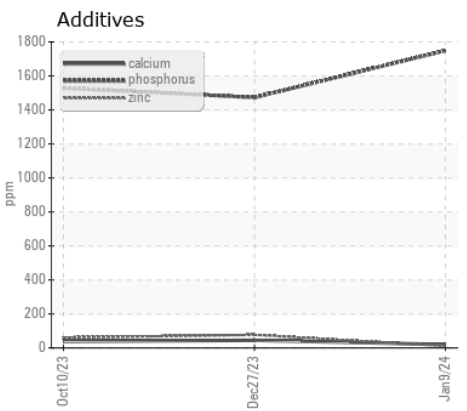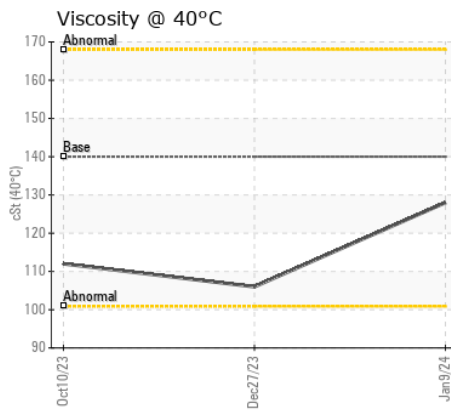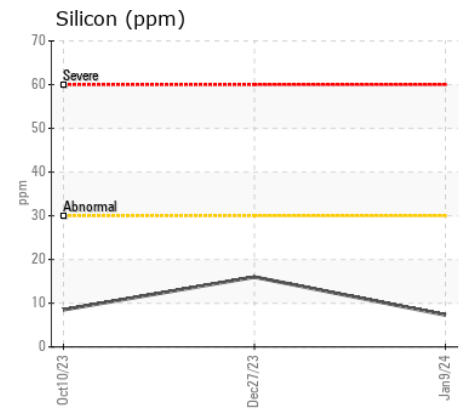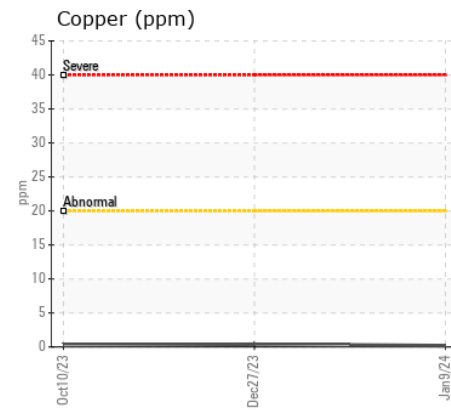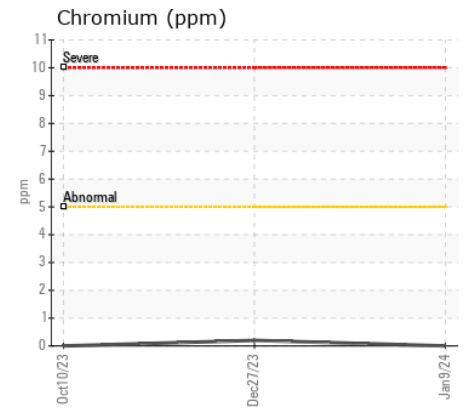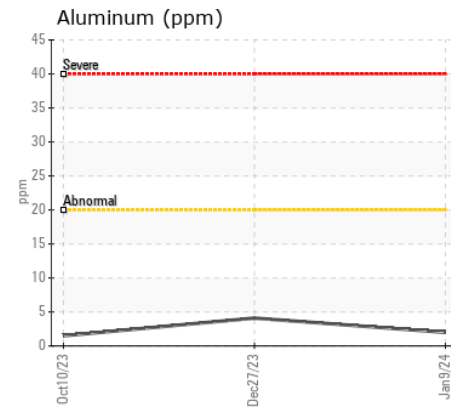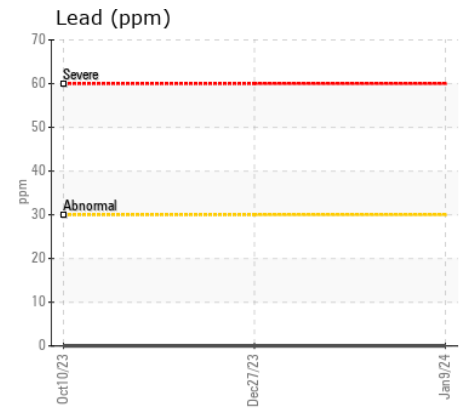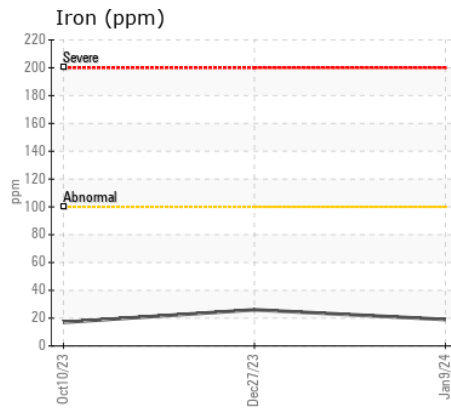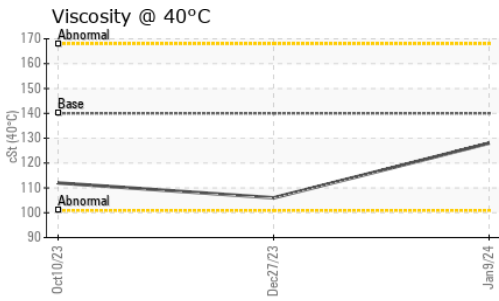

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH **Received** : 15 Jan 2024  
**Lab Number** : 02608782 **Diagnosed** : 15 Jan 2024  
**Unique Number** : 5709868 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**INTERFOR CORP**  
 5060 RTE 430  
 BRUNSWICK MINE, NB  
 CA E2A 6W6  
 Contact: Daniel Hachey  
 daniel.hachey@interfor.com  
 T: (506)547-8700  
 F: (506)548-1892