



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[526181]

Machine Id

HEKY310PJF001668

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0467837	---	---
Sample Date		Client Info		11 Jan 2024	---	---
Machine Age	hrs	Client Info		3792	---	---
Oil Age	hrs	Client Info		400	---	---
Filter Age	hrs	Client Info		400	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	3	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	1	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	<1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	11	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	4.5	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.2	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	1	---	---
Boron	ppm	ASTM D5185(m)	250	109	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	100	56	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	450	379	---	---
Calcium	ppm	ASTM D5185(m)	3000	1706	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	988	---	---
Zinc	ppm	ASTM D5185(m)	1350	1106	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2840	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.0	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.1	---	---

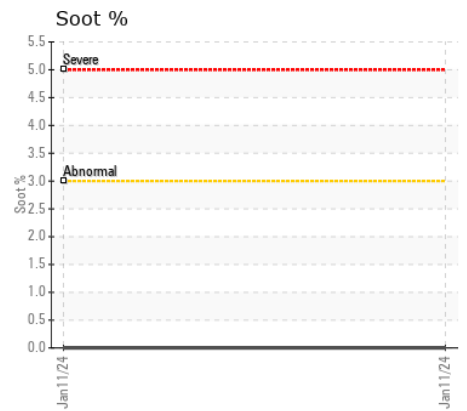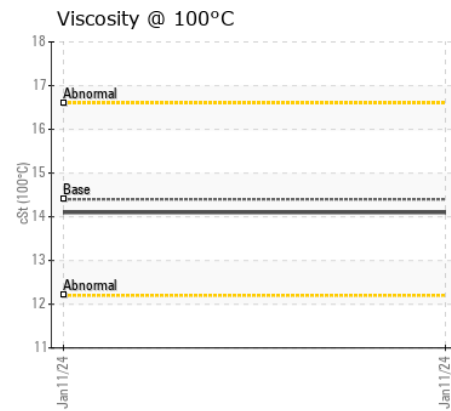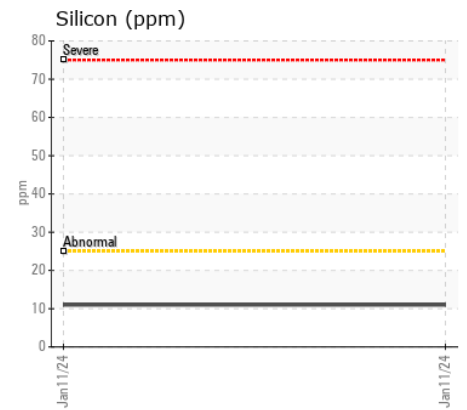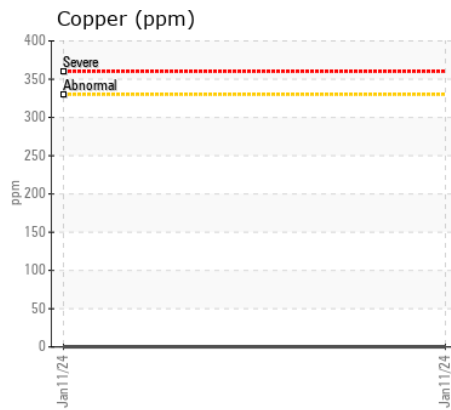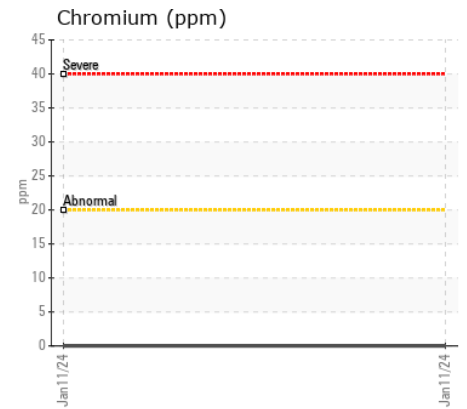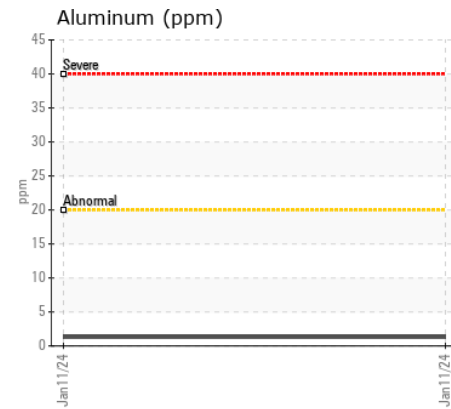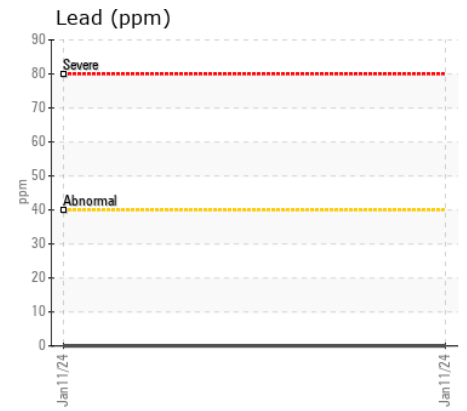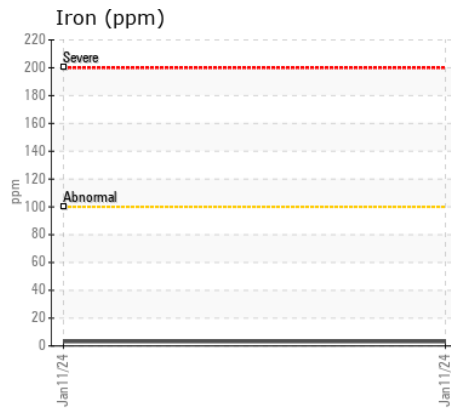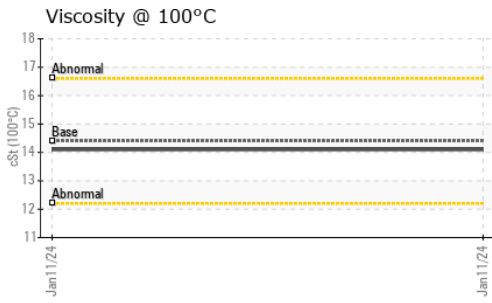

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0467837 **Received** : 16 Jan 2024
Lab Number : 02608860 **Diagnosed** : 16 Jan 2024
Unique Number : 5709946 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

ROBERTS FARM EQUIPMENT
 014945 COUNTY RD 10, R.R. #1
 CHESLEY, ON
 CA N0G 1L0
 Contact: Chad Roney
 chad@robertsfarm.com
 T: (519)363-3192
 F: (519)363-2673

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.