



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Area
SAMUELRIS
Machine Id
S30-26111 Port Steering Gear Hydraulic System
Component
Port Steering
Fluid
PETRO CANADA HYDREX MV 32 (450 LTR)

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0759189	WC0759201	WC0759165
Sample Date		Client Info		12 Jan 2024	10 Jul 2023	07 Jan 2023
Machine Age	mths	Client Info		110	104	98
Oil Age	mths	Client Info		63	57	51
Filter Age	mths	Client Info		110	104	98
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				ABNORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>60	3	2	2
Chromium	ppm	ASTM D5185(m)	>12	2	2	2
Nickel	ppm	ASTM D5185(m)	>6	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>4	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>12	<1	<1	1
Copper	ppm	ASTM D5185(m)	>30	9	9	9
Tin	ppm	ASTM D5185(m)		<1	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is a moderate amount of silt (particulates < 14 microns in size) present in the fluid.

Silicon	ppm	ASTM D5185(m)	>10	0	0	0
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method		NEG	NEG	NEG
Particles >4µm		ASTM D7647	>2500	7018	5400	2483
Particles >6µm		ASTM D7647	>640	1118	979	135
Particles >14µm		ASTM D7647	>80	33	48	9
Particles >21µm		ASTM D7647	>20	9	9	2
Particles >38µm		ASTM D7647	>4	1	0	0
Particles >71µm		ASTM D7647	>3	1	0	0
Oil Cleanliness		ISO 4406 (c)	>18/16/13	20/17/12	20/17/13	18/14/10
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*		NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The fluid is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Sodium	ppm	ASTM D5185(m)		0	<1	0
Boron	ppm	ASTM D5185(m)	0	0	<1	<1
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	1	0	0	0
Magnesium	ppm	ASTM D5185(m)	0	<1	<1	0
Calcium	ppm	ASTM D5185(m)	50	78	76	79
Phosphorus	ppm	ASTM D5185(m)	330	305	326	320
Zinc	ppm	ASTM D5185(m)	430	382	400	382
Sulfur	ppm	ASTM D5185(m)	760	714	729	723
Acid Number (AN)	mg KOH/g	ASTM D974*	0.60	0.24	0.26	0.25
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	29.9	31.9	31.9

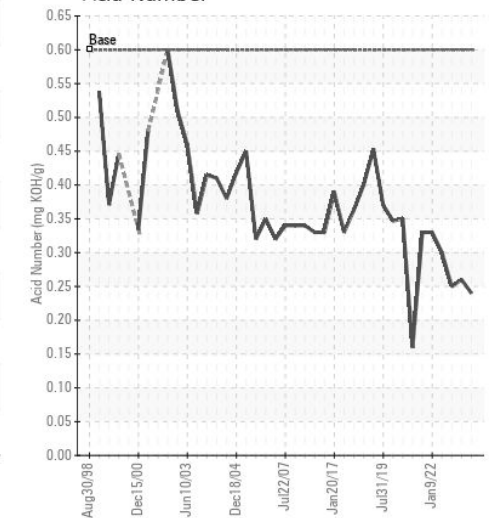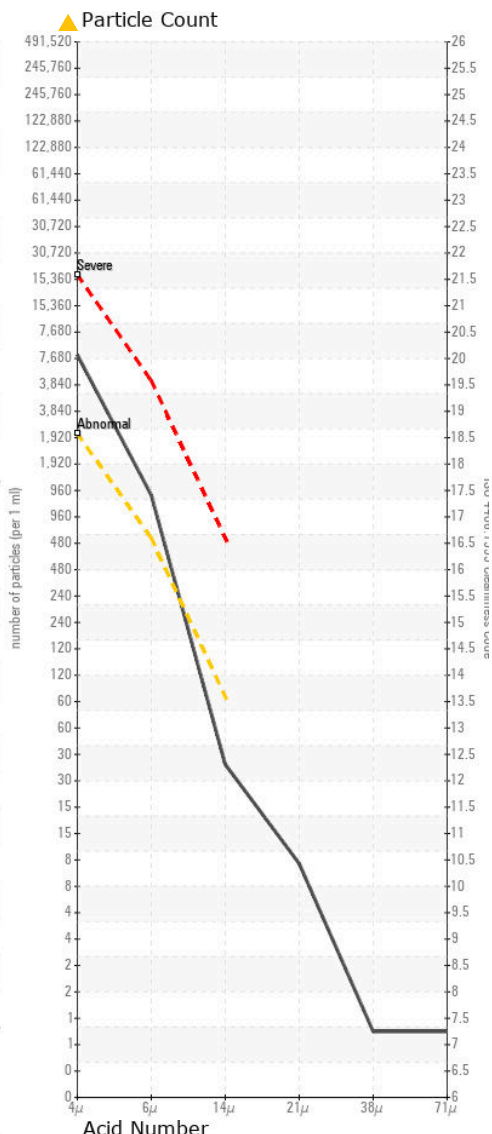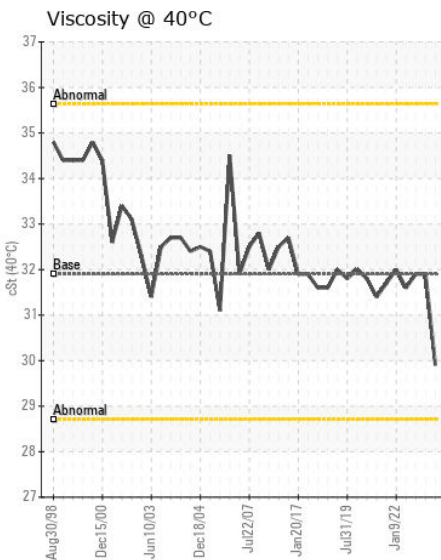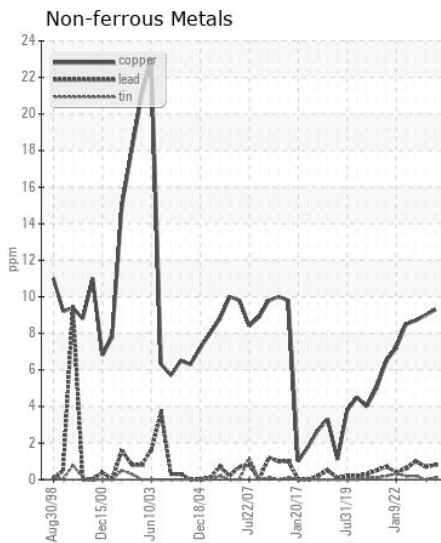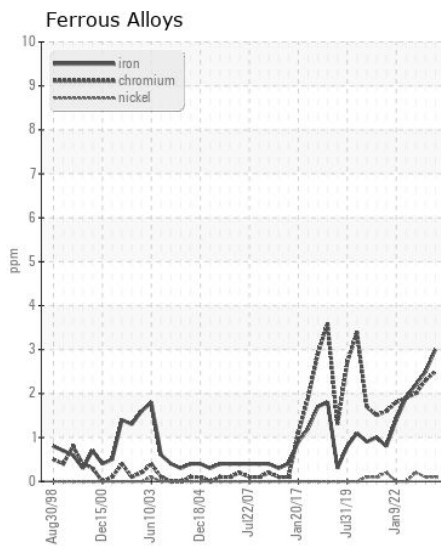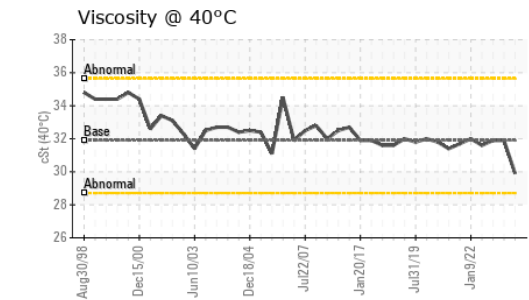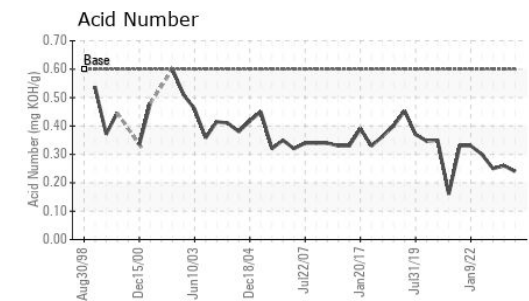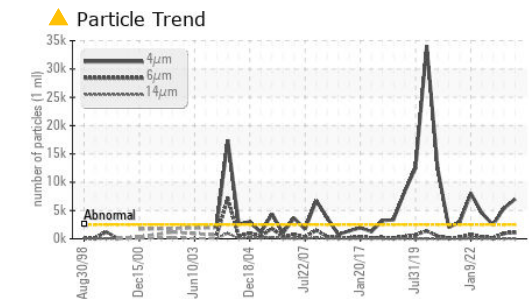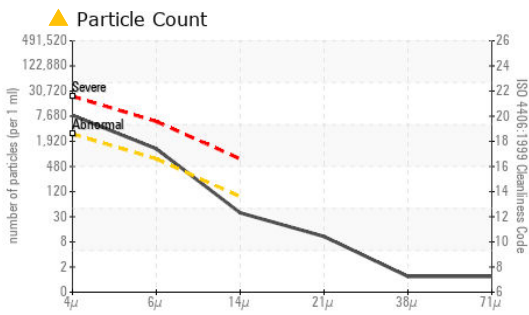

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0759189
Lab Number : 02608983
Unique Number : 5710069
Test Package : MAR 2

CANADIAN COAST GUARD
 CCGS SAMUEL RISLEY, 28 WAUBEEK STREET
 PARRY SOUND, ON
 CA P2A 1B9
 Contact: Samuel Risley
 SamuelRisleySE@ccgs-ngcc.gc.ca
 T: (705)746-1993
 F: (705)746-1993

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.