



LIEBHERR

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
LIEBHERR LH50M 145181-1216
Component
Splitter Box
Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 75W90. Please confirm.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | LH0277540 | LH0274798 | LH0261385 |
| Sample Date | | Client Info | | 04 Jan 2024 | 29 Aug 2023 | 28 Apr 2023 |
| Machine Age | hrs | Client Info | | 1614 | 1043 | 497 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|---------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185(m) | >100 | 16 | 31 | 26 |
| Chromium | ppm | ASTM D5185(m) | >5 | 0 | <1 | 0 |
| Nickel | ppm | ASTM D5185(m) | >5 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >20 | <1 | <1 | <1 |
| Lead | ppm | ASTM D5185(m) | >30 | <1 | 0 | <1 |
| Copper | ppm | ASTM D5185(m) | >20 | 1 | 2 | <1 |
| Tin | ppm | ASTM D5185(m) | >10 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| White Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | NONE |

CONTAMINATION










There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|---------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185(m) | >30 | <1 | <1 | <1 |
| Potassium | ppm | ASTM D5185(m) | >20 | 1 | 1 | 2 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Silt | scalar | Visual* | NONE | NONE | VLITE | NONE |
| Debris | scalar | Visual* | NONE | VLITE | VLITE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|---------------|-------|--------------|-------|-------|
| Sodium | ppm | ASTM D5185(m) | >25 | <1 | 2 | 3 |
| Boron | ppm | ASTM D5185(m) | 400 | 58 | 187 | 1 |
| Barium | ppm | ASTM D5185(m) | 200 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 12 | 0 | <1 | 0 |
| Manganese | ppm | ASTM D5185(m) | | 0 | 1 | 2 |
| Magnesium | ppm | ASTM D5185(m) | 12 | 2 | 5 | 2 |
| Calcium | ppm | ASTM D5185(m) | 150 | 18 | 26 | 10 |
| Phosphorus | ppm | ASTM D5185(m) | 1650 | 960 | 1446 | 1727 |
| Zinc | ppm | ASTM D5185(m) | 125 | 20 | 30 | 13 |
| Sulfur | ppm | ASTM D5185(m) | 22500 | 20469 | 21636 | 25554 |
| Visc @ 40°C | cSt | ASTM D7279(m) | 109 | 90.8 | 118 | 199 |

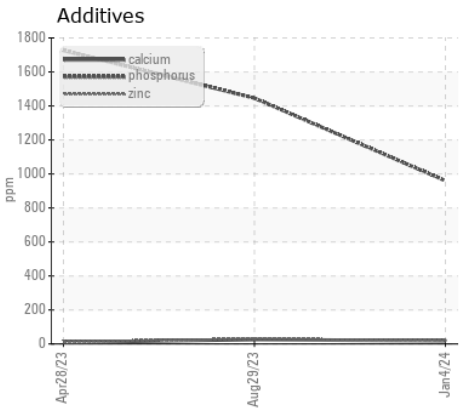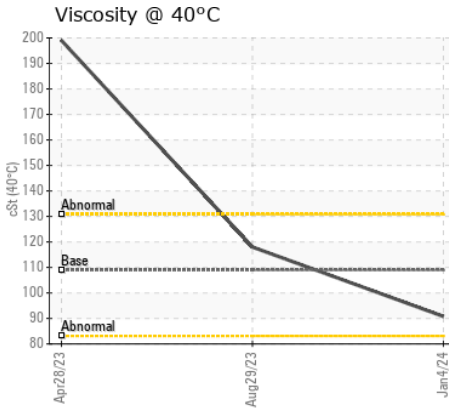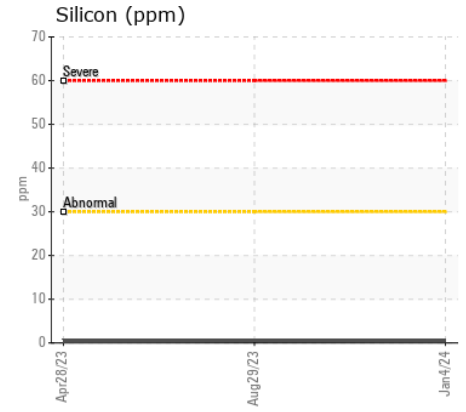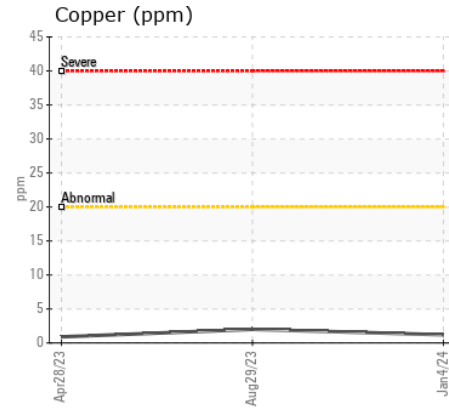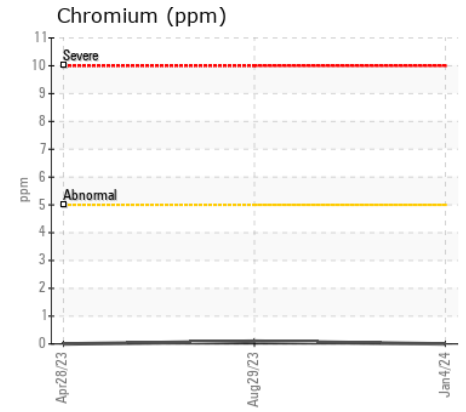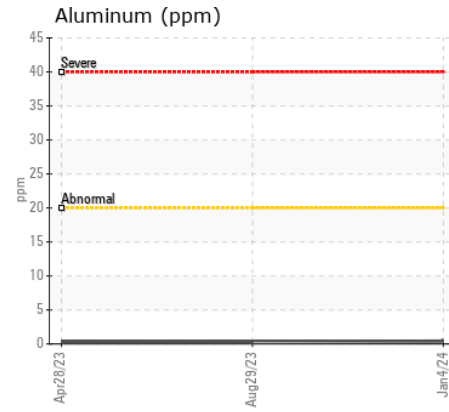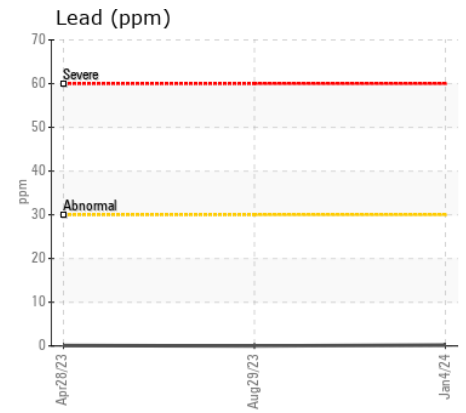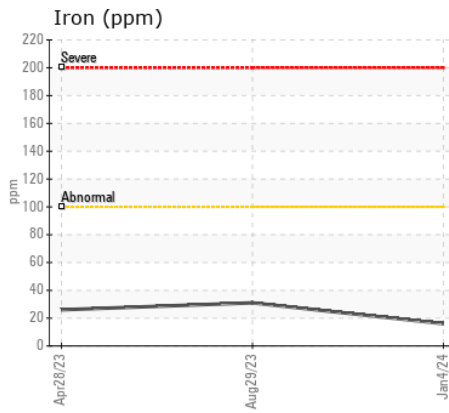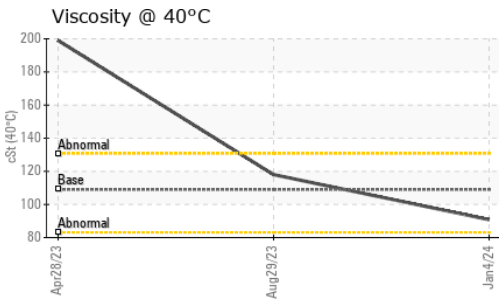

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0277540 **Received** : 16 Jan 2024
Lab Number : 02609114 **Diagnosed** : 16 Jan 2024
Unique Number : 5710200 **Diagnostician** : Kevin Marson
Test Package : MOB 1

METALOGICS INC
 70 NORTH QUEEN ST.
 ETOBICOKE, ON
 CA M8Z 2C7
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: