



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR L580 070558-1762**  
Component  
**Rear Left Wheel Hub**  
Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0275621</b>	---	---
Sample Date		Client Info		<b>02 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>797</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	<b>184</b>	---	---
Chromium	ppm	ASTM D5185(m)	>8	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>5	<b>2</b>	---	---
Lead	ppm	ASTM D5185(m)	>5	<b>1</b>	---	---
Copper	ppm	ASTM D5185(m)	>50	<b>28</b>	---	---
Tin	ppm	ASTM D5185(m)		<b>8</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>21</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>MODER</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>9</b>	---	---
Boron	ppm	ASTM D5185(m)	0	<b>1</b>	---	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	0	<b>37</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<1	<b>2</b>	---	---
Calcium	ppm	ASTM D5185(m)	<1	<b>14</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	2143	<b>2219</b>	---	---
Zinc	ppm	ASTM D5185(m)	<1	<b>124</b>	---	---
Sulfur	ppm	ASTM D5185(m)	23468	<b>25148</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	170	<b>191</b>	---	---

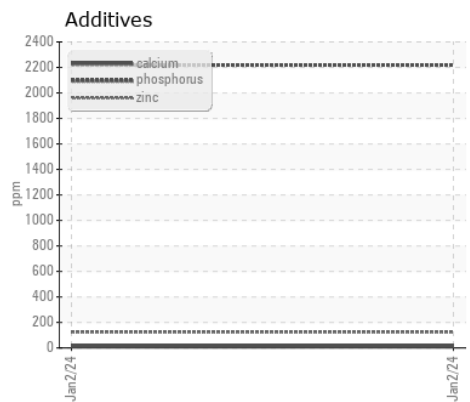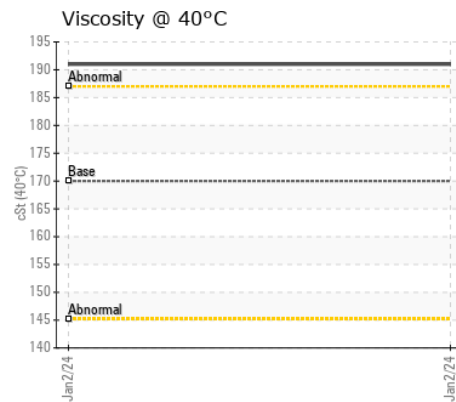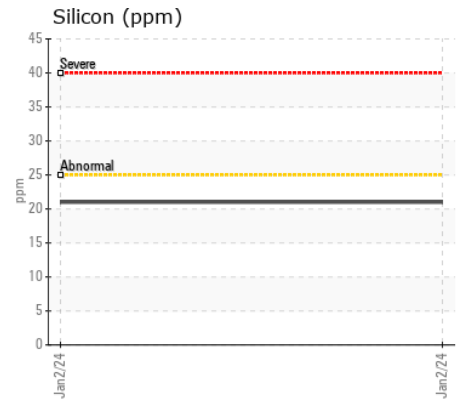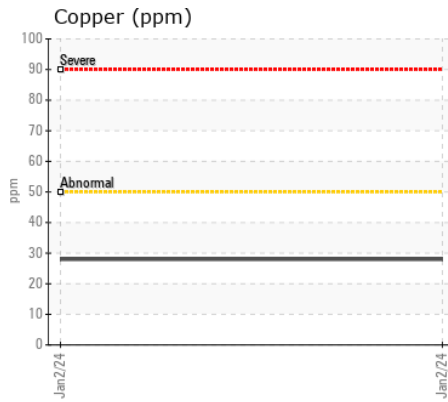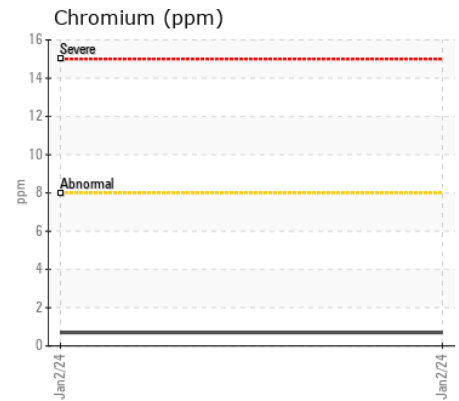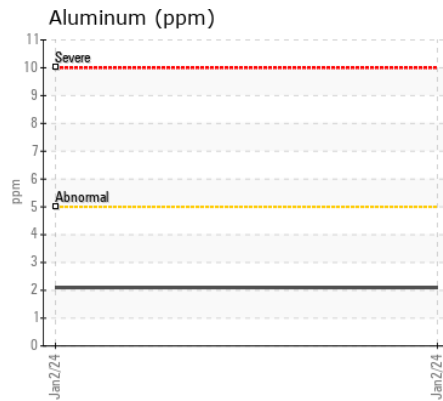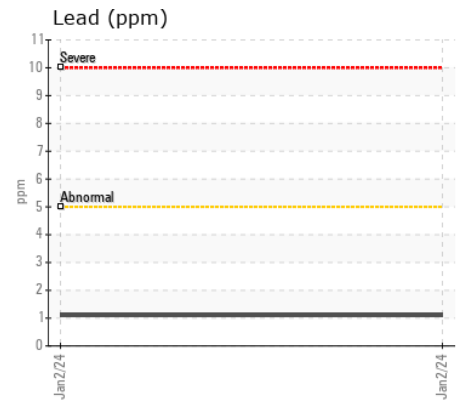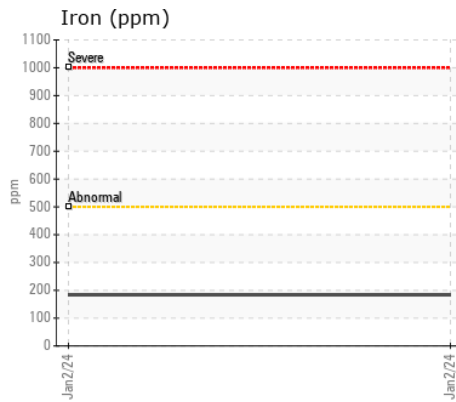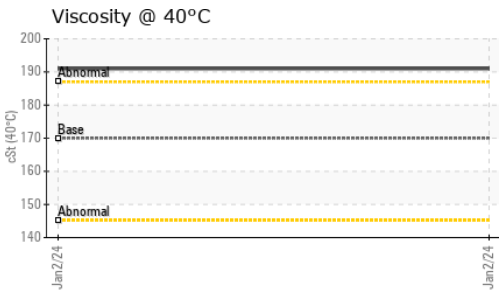

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0275621 **Received** : 16 Jan 2024  
**Lab Number** : 02609119 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 5710205 **Diagnostician** : Kevin Marson  
**Test Package** : MOBCE ( Additional Tests: Visual )

**HUBERT ET FILS INC**  
 1012 CHEMIN DE PARC INDUSTRIEL  
 BOIS-FRANC, QC  
 CA J9E 3A9  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: