



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**LIEBHERR L580 070558-1762**  
Component  
**Front Right Wheel Hub**  
Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0275620	---	---
Sample Date		Client Info		02 Jan 2024	---	---
Machine Age	hrs	Client Info		797	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	233	---	---
Chromium	ppm	ASTM D5185(m)	>8	1	---	---
Nickel	ppm	ASTM D5185(m)	>5	1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>5	2	---	---
Lead	ppm	ASTM D5185(m)	>5	1	---	---
Copper	ppm	ASTM D5185(m)	>50	26	---	---
Tin	ppm	ASTM D5185(m)		10	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	20	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	MODER	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		8	---	---
Boron	ppm	ASTM D5185(m)	0	1	---	---
Barium	ppm	ASTM D5185(m)	0	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	60	---	---
Magnesium	ppm	ASTM D5185(m)	<1	2	---	---
Calcium	ppm	ASTM D5185(m)	<1	9	---	---
Phosphorus	ppm	ASTM D5185(m)	2143	2244	---	---
Zinc	ppm	ASTM D5185(m)	<1	148	---	---
Sulfur	ppm	ASTM D5185(m)	23468	25563	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	170	190	---	---

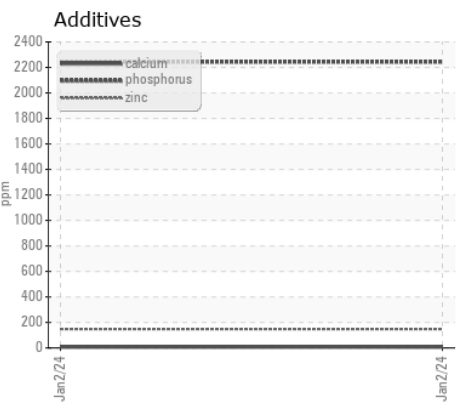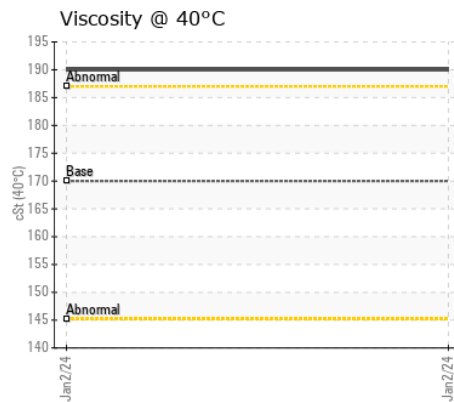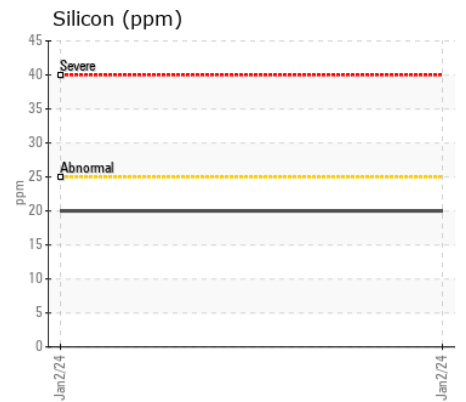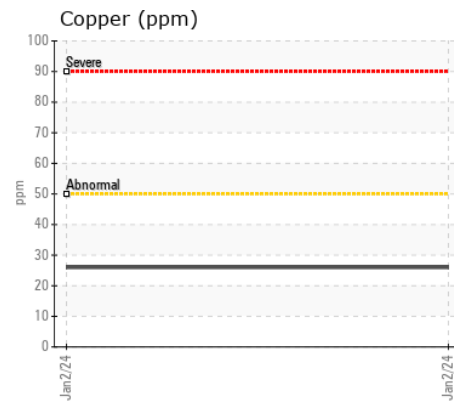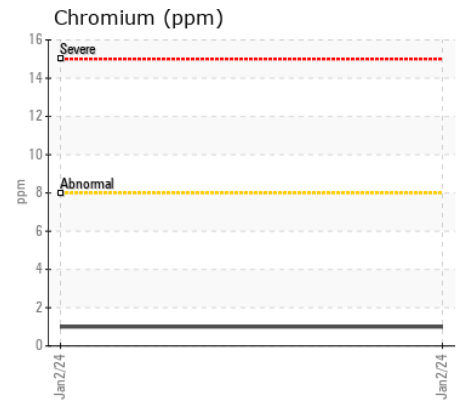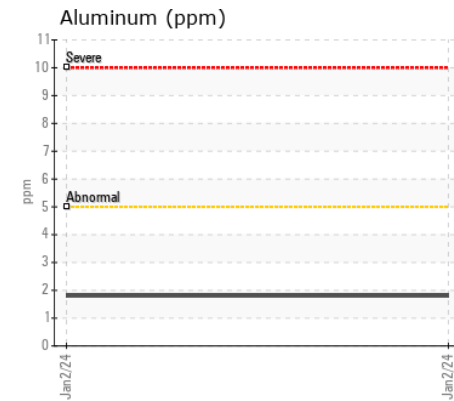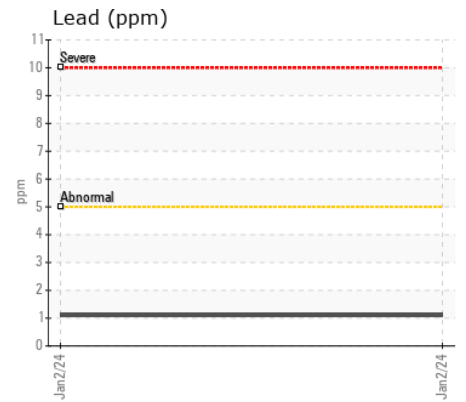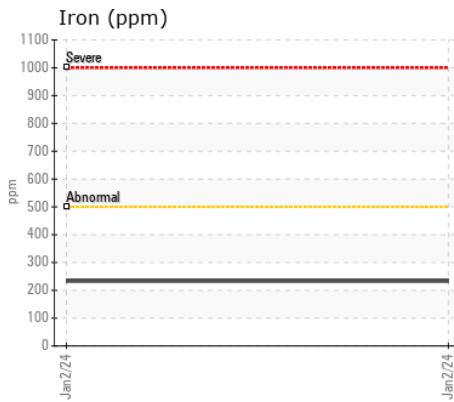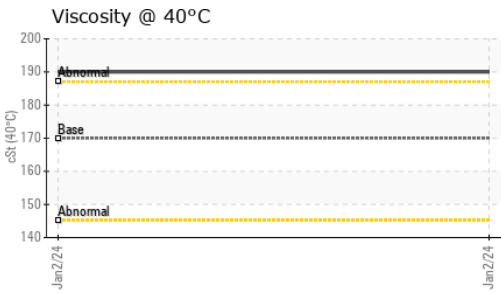

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0275620 **Received** : 16 Jan 2024  
**Lab Number** : 02609121 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 5710207 **Diagnostician** : Kevin Marson  
**Test Package** : MOBCE ( Additional Tests: Visual )

**HUBERT ET FILS INC**  
 1012 CHEMIN DE PARC INDUSTRIEL  
 BOIS-FRANC, QC  
 CA J9E 3A9  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: