



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	NORMAL

Machine Id
LF2278
Component
Diesel Engine
Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0862508	---	---
Sample Date		Client Info		11 Jan 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		692	---	---
Filter Age	hrs	Client Info		692	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				MARGINAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	17	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>2	0	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>20	6	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION












Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185(m)	>25	7	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel	%	ASTM D7593*	>3.0	▲ 2.9	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>6	0.1	---	---
Nitration	Abs/cm	ASTM D7624*	>20	10.5	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.3	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)	0	4	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	60	51	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	1010	827	---	---
Calcium	ppm	ASTM D5185(m)	1070	1215	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	979	---	---
Zinc	ppm	ASTM D5185(m)	1270	1143	---	---
Sulfur	ppm	ASTM D5185(m)	2060	2728	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	22.1	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	11.9	---	---

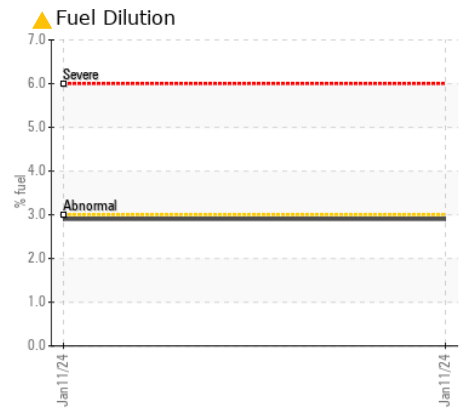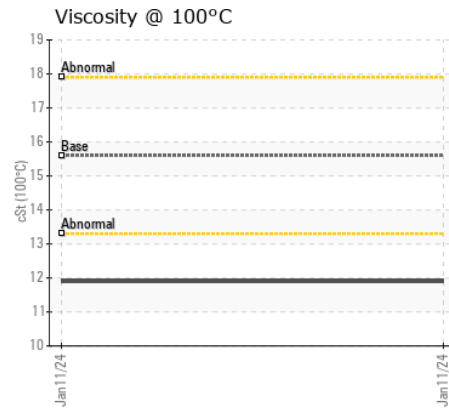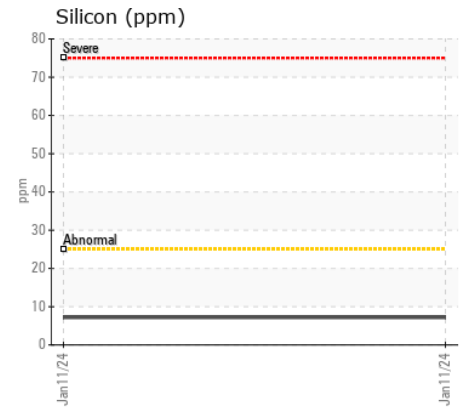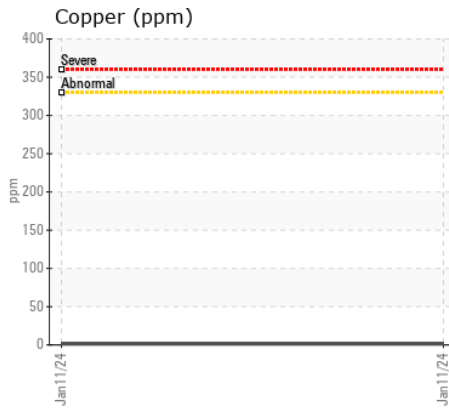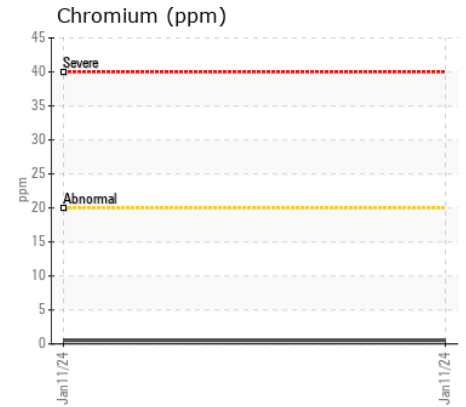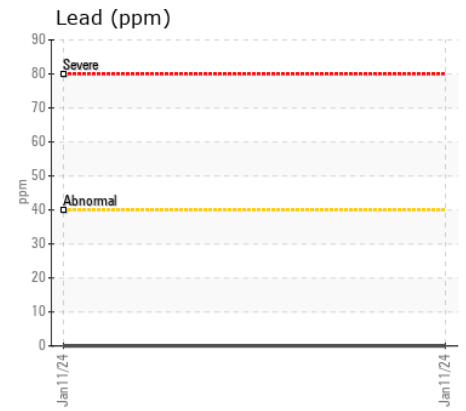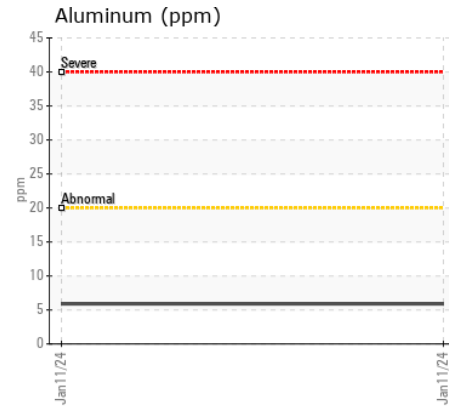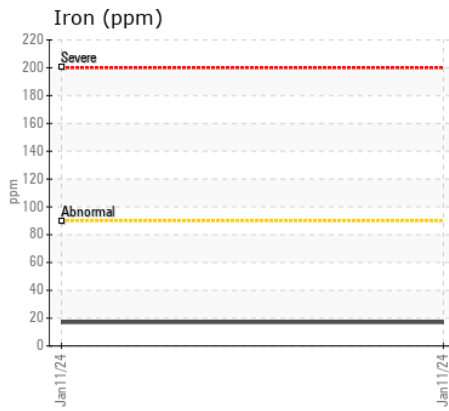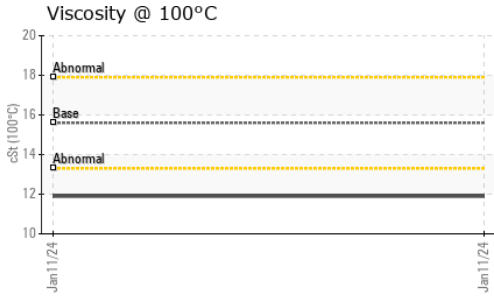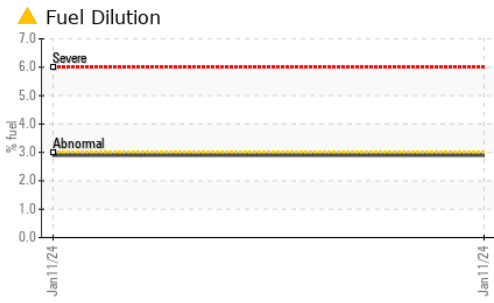

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0862508 **Received** : 17 Jan 2024
Lab Number : 02609171 **Diagnosed** : 18 Jan 2024
Unique Number : 5710257 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)

HVAC RENTALS
 20 SIMPSON ROAD
 BOLTON, ON
 CA L7E 1G9
 Contact: Hongwu Zhang
 hzhang@hvacentals.ca
 T: (647)637-1409
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.