



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**ISUZU LF2041**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0862465	---	---
Sample Date		Client Info		12 Jan 2024	---	---
Machine Age	hrs	Client Info		6070	---	---
Oil Age	hrs	Client Info		749	---	---
Filter Age	hrs	Client Info		749	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	8	---	---
Chromium	ppm	ASTM D5185(m)	>20	2	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	3	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	<1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

## CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	8.4	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.0	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	---	---
Boron	ppm	ASTM D5185(m)	0	3	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	60	52	---	---
Manganese	ppm	ASTM D5185(m)	0	0	---	---
Magnesium	ppm	ASTM D5185(m)	1010	845	---	---
Calcium	ppm	ASTM D5185(m)	1070	1408	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	1000	---	---
Zinc	ppm	ASTM D5185(m)	1270	1222	---	---
Sulfur	ppm	ASTM D5185(m)	2060	2747	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.1	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	14.6	---	---

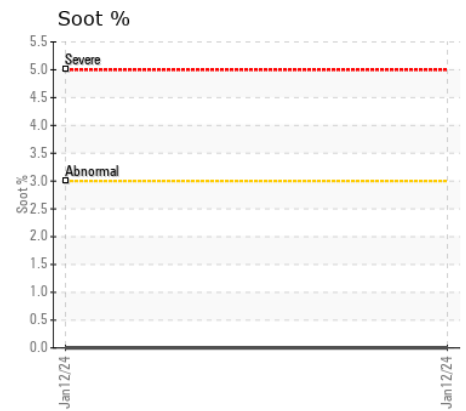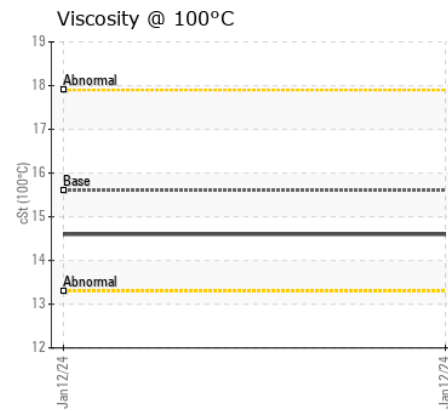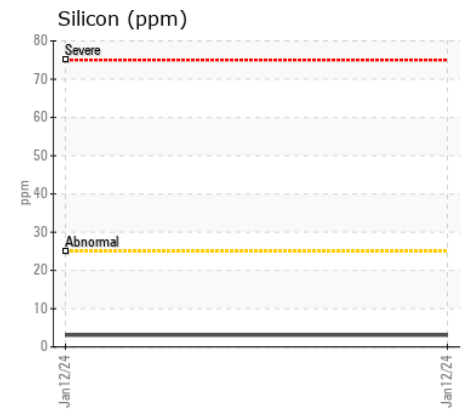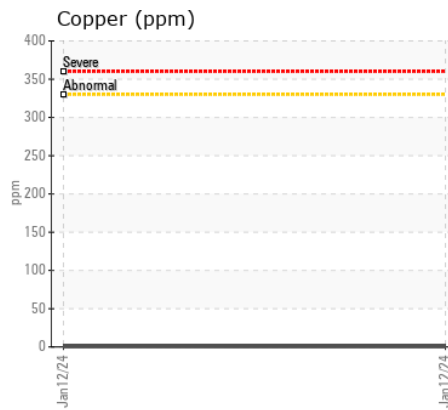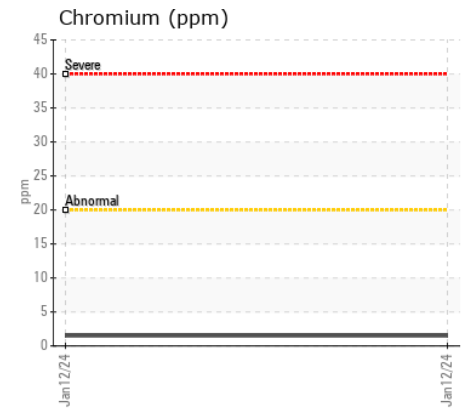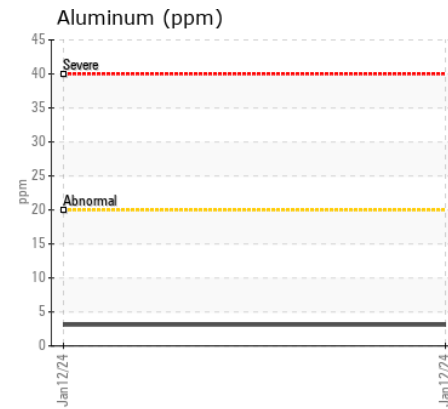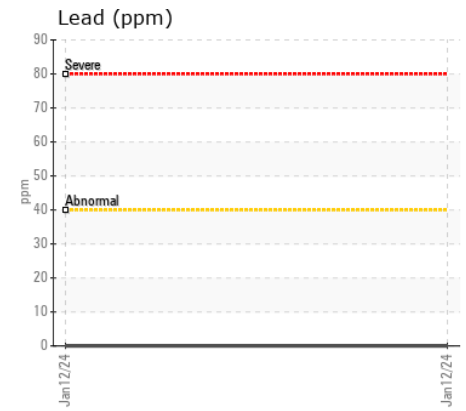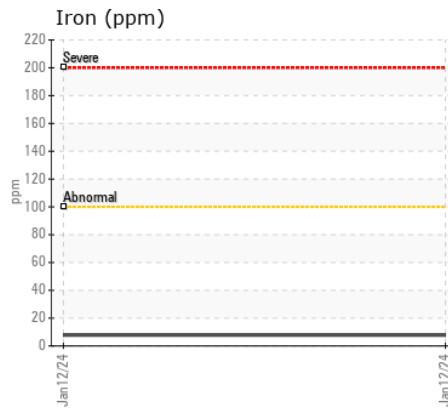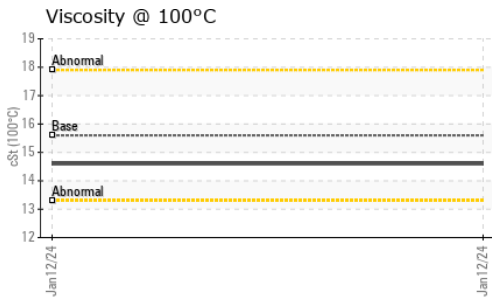

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0862465 **Received** : 17 Jan 2024  
**Lab Number** : 02609174 **Diagnosed** : 17 Jan 2024  
**Unique Number** : 5710260 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**HVAC RENTALS**  
 20 SIMPSON ROAD  
 BOLTON, ON  
 CA L7E 1G9  
 Contact: Hongwu Zhang  
 hzhang@hvacentals.ca  
 T: (647)637-1409  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.