



OIL ANALYSIS REPORT

WEAR	SEVERE
CONTAMINANTS	SEVERE
OIL CONDITION	NORMAL




Area
BRUCE B/8/43230
Machine Id
8-43230-P4-P IB Brg Drn
Component
Inboard Bearing
Fluid
ESSO NUTO H ISO 46 (--- GAL)

RECOMMENDATION

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. No other corrective action is recommended at this time. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

WEAR

Copper ppm levels are severe. Wear particle analysis indicates that the ferrous cutting particles are marginal. Bearing wear is indicated. Cutting wear particles are caused by either hard protuberances (mis-aligned components, etc.), or abrasives entering the system and embedding themselves in softer materials (sand, etc.), and gouging out mating surfaces.

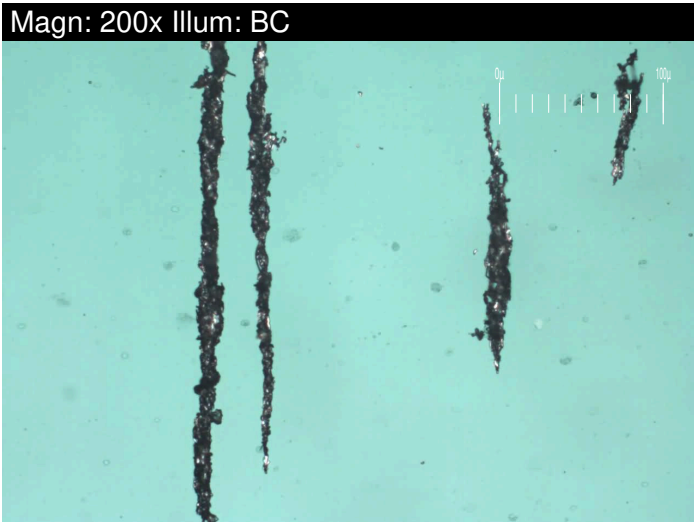

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0845406	WC0744593	WC0744561
Sample Date		Client Info		08 Jan 2024	06 Dec 2023	20 Jul 2023
Machine Age	kms	Client Info		0	0	0
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				SEVERE	SEVERE	SEVERE
Iron	ppm	ASTM D5185(m)	>10	<1	2	0
Chromium	ppm	ASTM D5185(m)	>5	<1	▲ 6	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	0
Titanium	ppm	ASTM D5185(m)	>5	0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>5	1	▲ 8	1
Copper	ppm	ASTM D5185(m)	>5	13	● 57	5
Tin	ppm	ASTM D5185(m)	>5	1	▲ 7	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Large Particles		DR-Ferr*		9.6	25.0	2.5
Small Particles		DR-Ferr*		2.8	10.3	1.4
Total Particles		DR-Ferr*	>---	12.4	35.3	3.9
Large Particles Percentage	%	DR-Ferr*		54.8	41.6	28.2
Severity Index		DR-Ferr*		65	368	3
Ferrous Rubbing	Scale 0-10	ASTM D7684*		3	4	2
Ferrous Sliding	Scale 0-10	ASTM D7684*			▲ 1	
Ferrous Cutting	Scale 0-10	ASTM D7684*		▲ 1	▲ 1	▲ 1
Ferrous Rolling	Scale 0-10	ASTM D7684*		■ 1	■ 1	■ 1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		■ 1		
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*			■ 1	
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				

CONTAMINANTS

There is a high amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code.


Silicon	ppm	ASTM D5185(m)	>5	<1	17	7
Potassium	ppm	ASTM D5185(m)	>20	0	0	<1
Water	%	ASTM D6304*	>0.005	0.002	0.002	0.00
ppm Water	ppm	ASTM D6304*	>50	19	18	0.00
Particles >4µm		ASTM D7647	>5000	141054	169532	97733
Particles >6µm		ASTM D7647	>1300	66351	123574	18240
Particles >14µm		ASTM D7647	>320	959	9288	279
Particles >21µm		ASTM D7647	>80	52	413	33
Particles >38µm		ASTM D7647	>20	1	3	3
Particles >71µm		ASTM D7647	>4	0	0	2
Oil Cleanliness		ISO 4406 (c)	>19/17/15	24/23/17	25/24/20	24/21/15
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.005	NEG	NEG	NEG
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	2	1

OIL CONDITION

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185(m)	>5	0	<1	0
Boron	ppm	ASTM D5185(m)	0	0	<1	0
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	5	<1	0	<1
Calcium	ppm	ASTM D5185(m)	50	53	53	54
Phosphorus	ppm	ASTM D5185(m)	330	377	348	383
Zinc	ppm	ASTM D5185(m)	410	429	444	455
Sulfur	ppm	ASTM D5185(m)	2700	6108	5776	5634
Acid Number (AN)	mg KOH/g	ASTM D974*	0.45	0.43	0.44	0.37
Visc @ 40°C	cSt	ASTM D7279(m)	46	43.5	43.0	44.4
Lubricant Degradation	Scale 0-10	ASTM D7684*				


Ferrous Alloys

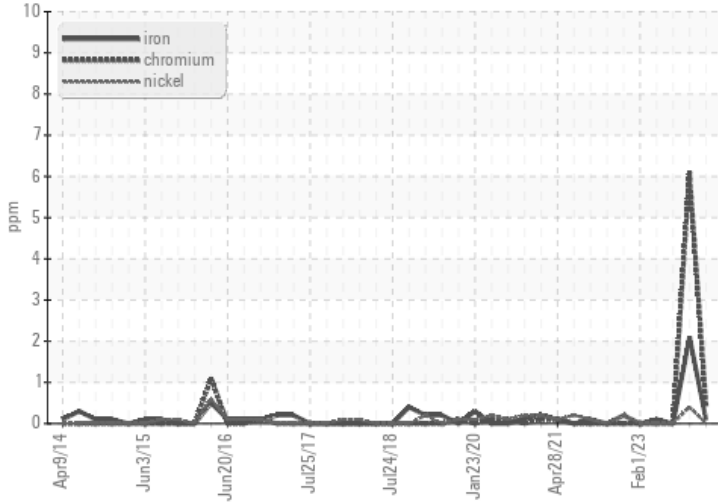


Particle Filter (Magn: 200 x)




Non-ferrous Metals

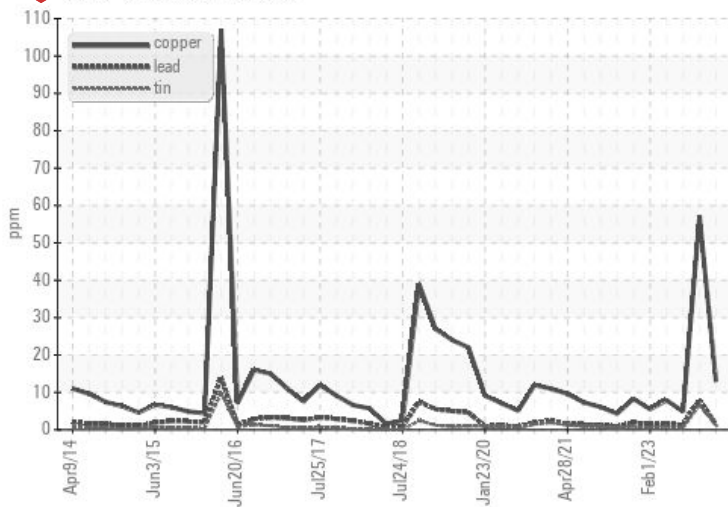

Viscosity @ 40°C

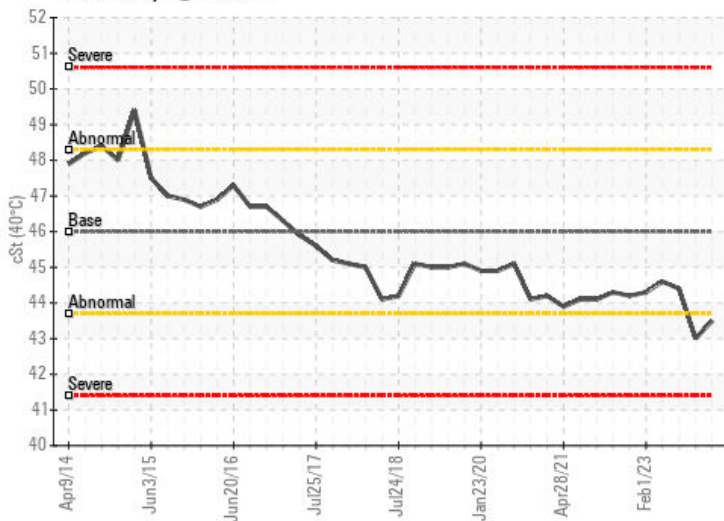

Acid Number

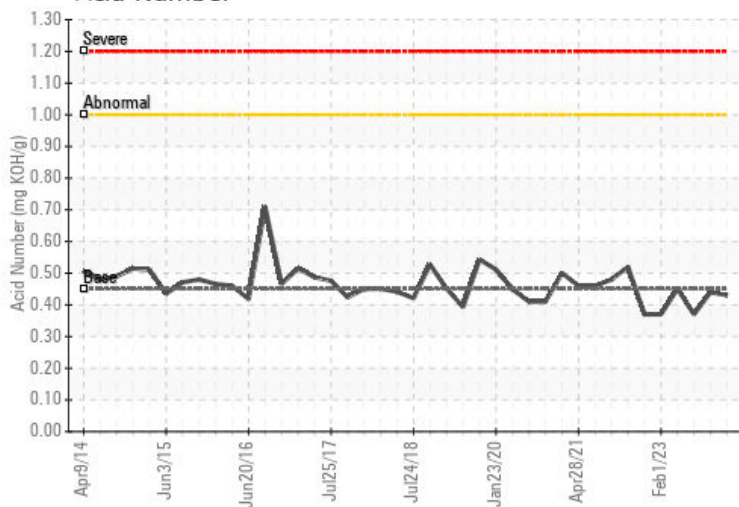

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0845406
Lab Number : 02609392
Unique Number : 5710478
Test Package : IND 2 (Additional Tests: A-FERR, BottomAnalysis, DR-FERR, FILTERPATCH, PrtFilter)

Bruce Power - Bruce A PdM
 P.O.Box 1540, 177 Tie Road., RM-222 U2 Column 2N11 615
 Tiverton, ON
 CA N0G 2T0
 Contact: Pierre Adouki
 pierre.adouki@brucepower.com

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*

T: (519)361-2673
 F:

This page left intentionally blank