



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1215
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0083711	PC0082294	PC0072206
Sample Date		Client Info		16 Jan 2024	15 Oct 2023	06 Jul 2023
Machine Age	kms	Client Info		8072	7607	7123
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>160	94	91	81
Chromium	ppm	ASTM D5185(m)	>5	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>50	23	23	20
Lead	ppm	ASTM D5185(m)	>50	26	28	26
Copper	ppm	ASTM D5185(m)	>225	19	18	15
Tin	ppm	ASTM D5185(m)	>10	4	4	4
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	7	8	7
Potassium	ppm	ASTM D5185(m)	>20	1	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	.2%
Sodium	ppm	ASTM D5185(m)		4	5	5
Boron	ppm	ASTM D5185(m)		65	65	68
Barium	ppm	ASTM D5185(m)		0	<1	<1
Molybdenum	ppm	ASTM D5185(m)		0	0	<1
Manganese	ppm	ASTM D5185(m)		<1	<1	1
Magnesium	ppm	ASTM D5185(m)		1	2	2
Calcium	ppm	ASTM D5185(m)		100	99	102
Phosphorus	ppm	ASTM D5185(m)		219	219	229
Zinc	ppm	ASTM D5185(m)		20	23	23
Sulfur	ppm	ASTM D5185(m)		1117	1045	1018
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	29.7	32.7	32.5
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	6.4	6.5	6.4
Viscosity Index (VI)	Scale	ASTM D2270*	155	175	157	153

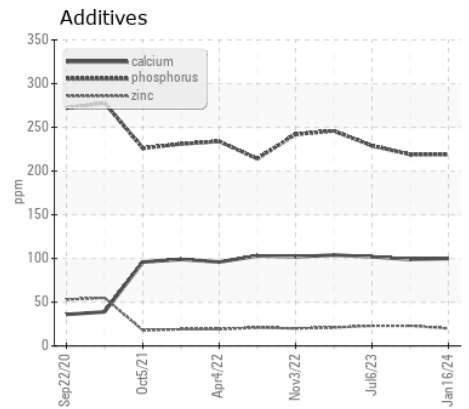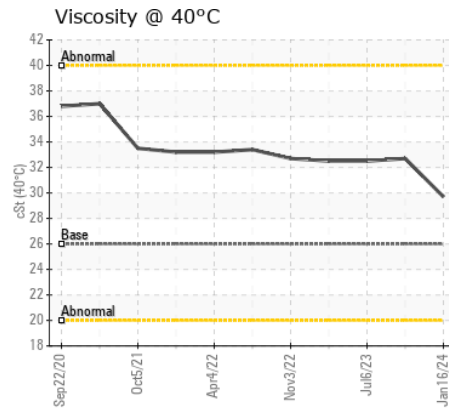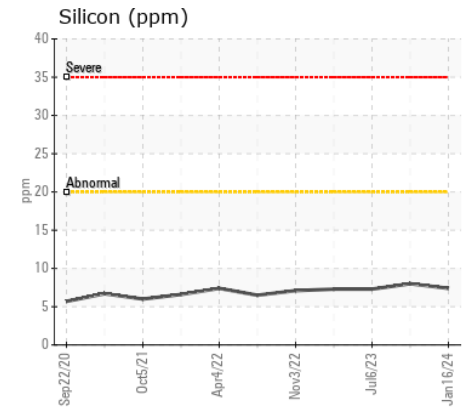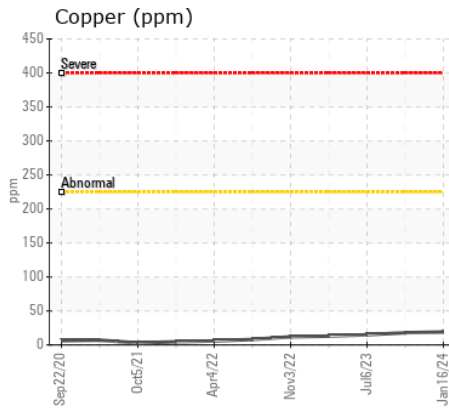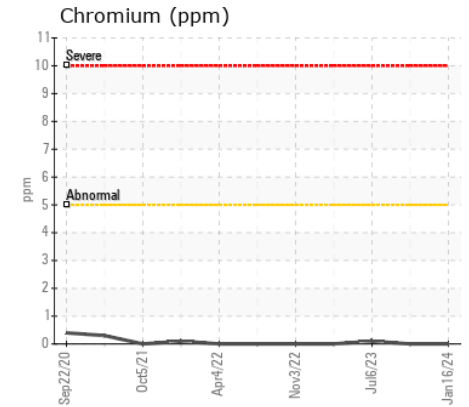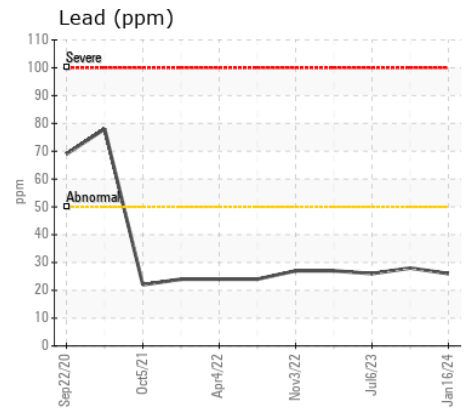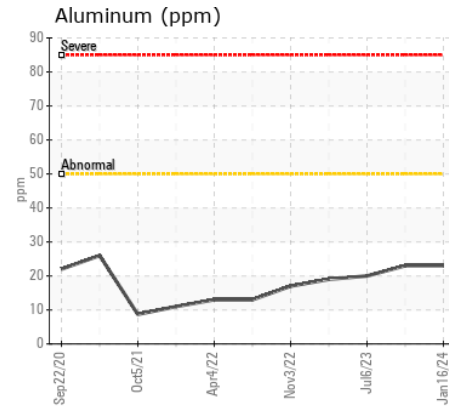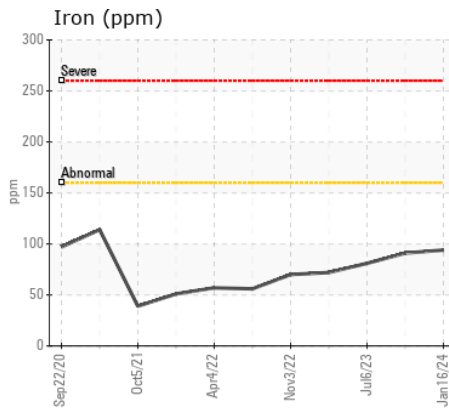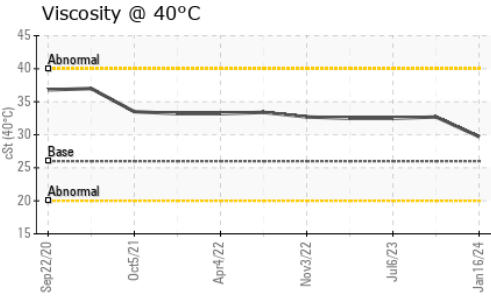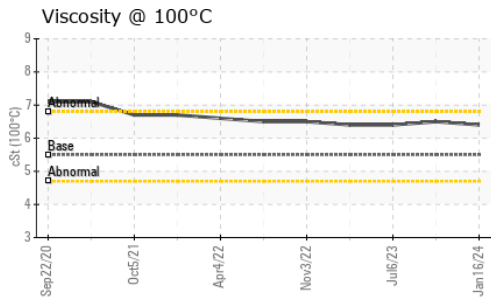

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUVILLE INC.**
Sample No. : PC0083711 **Received** : 17 Jan 2024 270 RUE BRUNET
Lab Number : 02609443 **Diagnosed** : 17 Jan 2024 MONT ST-HILAIRE, QC
Unique Number : 5710529 **Diagnostician** : Kevin Marson CA J3H 0M6
Test Package : MOB 1 (Additional Tests: KV100, VI) Contact: Martin Trudel
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: