



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(340290)
Machine Id
LIEBHERR L586 059132-1334
Component
Transmission (Manual)
Fluid
PETRO CANADA DURATRAN SYNTHETIC (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH	LH	LH0215324
Sample Date		Client Info		10 Jan 2024	07 Sep 2023	22 Nov 2022
Machine Age	hrs	Client Info		0	16500	12076
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>200	13	24	14
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)	>7	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	2	2	<1
Lead	ppm	ASTM D5185(m)	>45	0	0	<1
Copper	ppm	ASTM D5185(m)	>225	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>125	8	9	7
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	4
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		<1	2	1
Boron	ppm	ASTM D5185(m)	112	98	105	91
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	<1	0
Manganese	ppm	ASTM D5185(m)	1	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	13	12	13	13
Calcium	ppm	ASTM D5185(m)	3777	3628	3688	3531
Phosphorus	ppm	ASTM D5185(m)	1240	1216	1322	1179
Zinc	ppm	ASTM D5185(m)	1513	1434	1528	1312
Sulfur	ppm	ASTM D5185(m)	2716	3435	3122	2826
Visc @ 40°C	cSt	ASTM D7279(m)	46.79	36.4	35.0	38.7

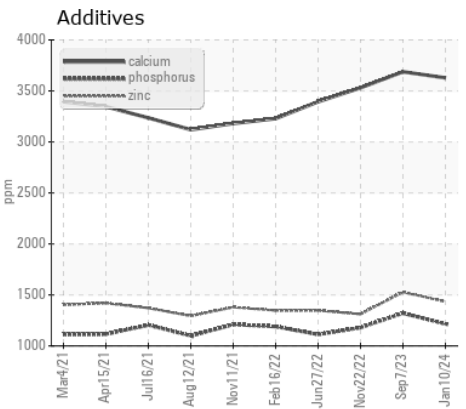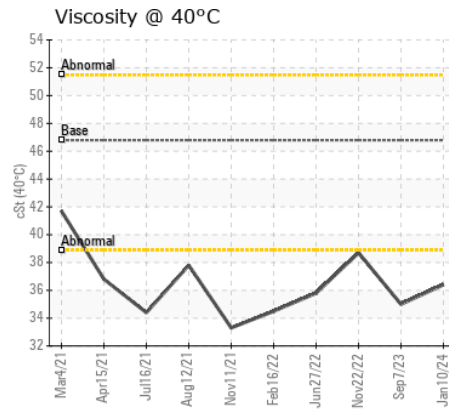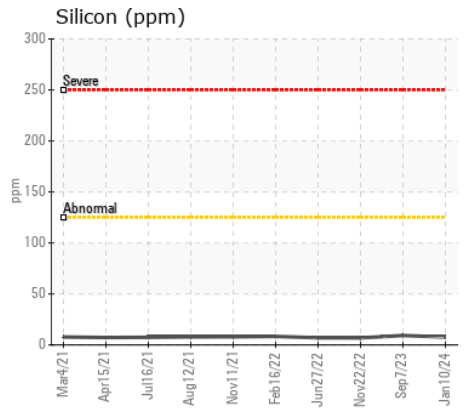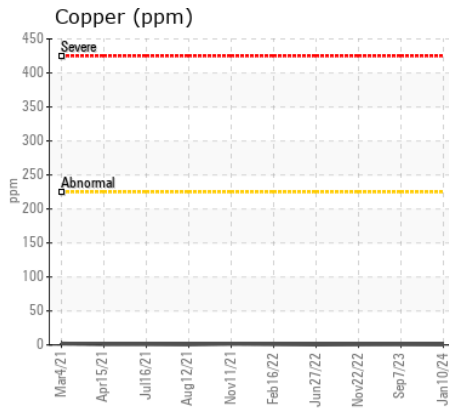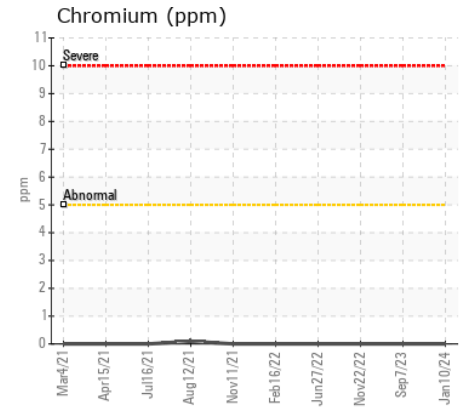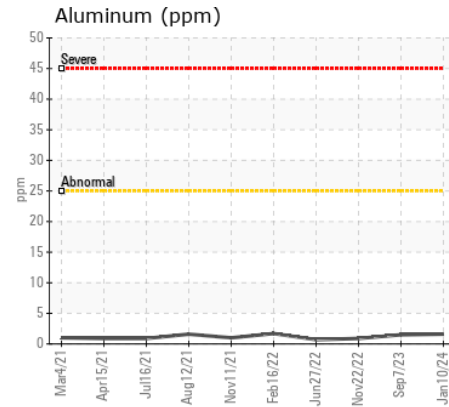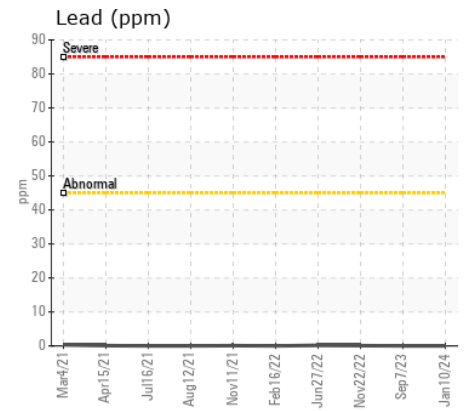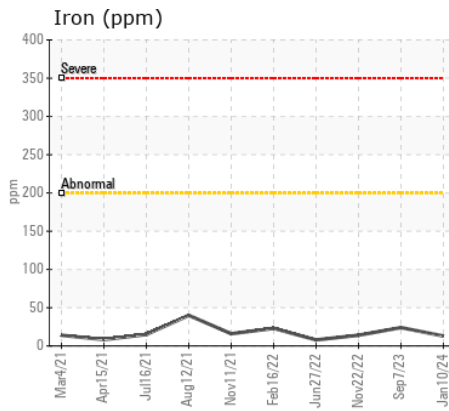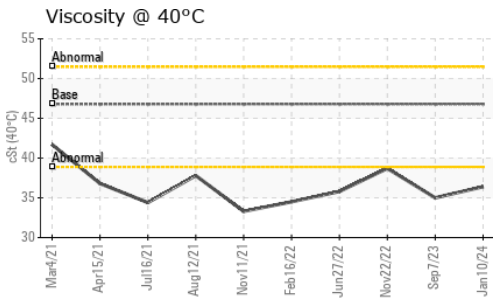

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH
Lab Number : 02609479
Unique Number : 5710565
Test Package : MOB 1

NEXOLIA, CHAPAIS ENERGIE SEC
 140 RUE DE LA CONGENERATION
 CHAPAIS, QC
 CA G0W 1H0
 Contact: Carl Adams

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (418)745-2521
 F: (418)745-3680