



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**LIEBHERR LH30M 73579-1200**  
Component  
**Front Differential**  
Fluid  
**PETRO CANADA TRAXON 75W90 SYNTHETIC (--- LTR)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0277575	---	---
Sample Date		Client Info		12 Jan 2024	---	---
Machine Age	hrs	Client Info		13186	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>190	2	---	---
Chromium	ppm	ASTM D5185(m)	>2	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		<1	---	---
Aluminum	ppm	ASTM D5185(m)	>5	<1	---	---
Lead	ppm	ASTM D5185(m)	>15	0	---	---
Copper	ppm	ASTM D5185(m)	>70	<1	---	---
Tin	ppm	ASTM D5185(m)	>2	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	1	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>.2	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)	328	222	---	---
Barium	ppm	ASTM D5185(m)	1	0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	1	2	---	---
Calcium	ppm	ASTM D5185(m)	7	17	---	---
Phosphorus	ppm	ASTM D5185(m)	1145	1533	---	---
Zinc	ppm	ASTM D5185(m)	3	4	---	---
Sulfur	ppm	ASTM D5185(m)	17909	21992	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	121	---	---

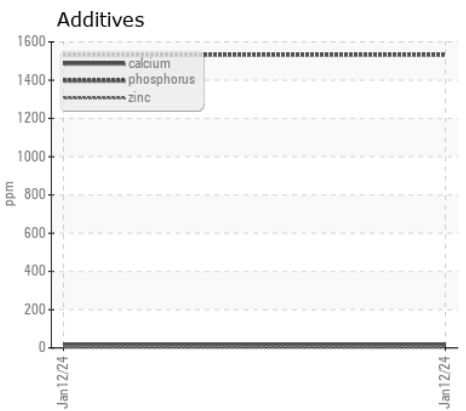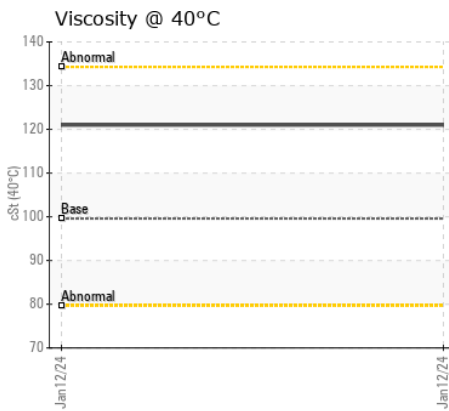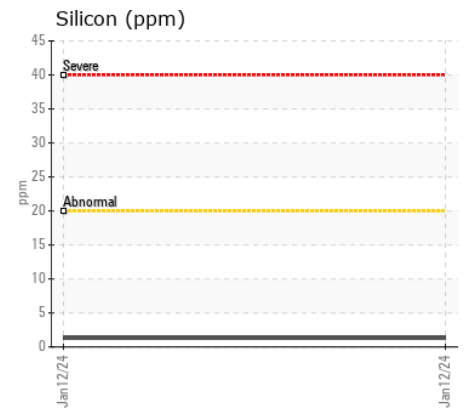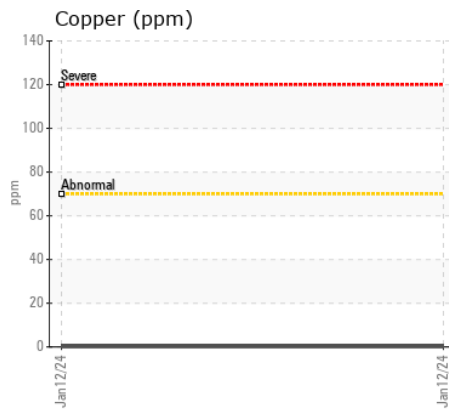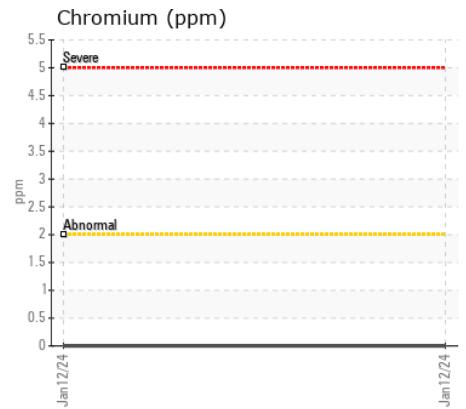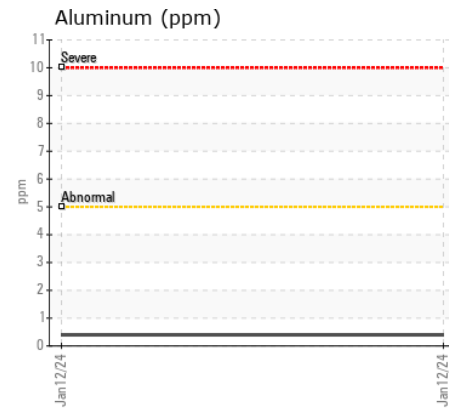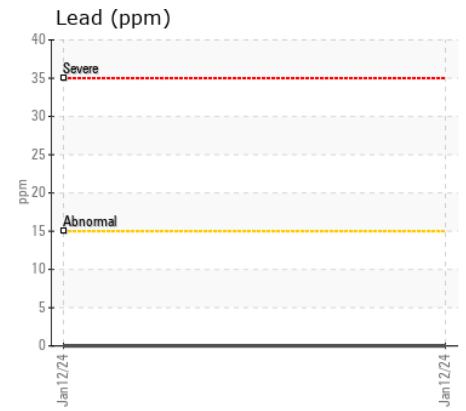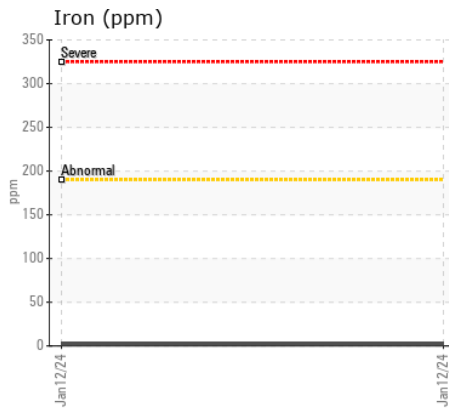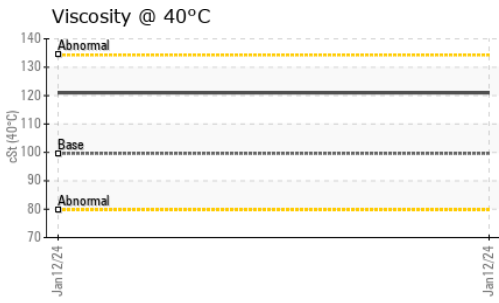

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0277575 **Received** : 17 Jan 2024  
**Lab Number** : 02609515 **Diagnosed** : 17 Jan 2024  
**Unique Number** : 5710601 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**GERDAU METALS**  
 5402 OLD RICHMOND RD  
 NEPEAN, ON  
 CA K2R 1G7  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: