



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR L556 053602-1484**

Component  
**Rear Left Wheel Hub**

Fluid  
**PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)**

### RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.  
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0278838</b>	LH0123093	LH0270371
Sample Date		Client Info		<b>11 Jan 2024</b>	13 Oct 2023	14 Jul 2023
Machine Age	hrs	Client Info		<b>7741</b>	7226	6154
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	<b>126</b>	28	88
Chromium	ppm	ASTM D5185(m)	>8	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>5	<b>2</b>	<1	1
Lead	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>50	<b>21</b>	8	33
Tin	ppm	ASTM D5185(m)		<b>1</b>	0	1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	1	3
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Debris	scalar	Visual*	NONE	<b>NONE</b>	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.  
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	1	<1
Boron	ppm	ASTM D5185(m)	328	<b>2</b>	2	6
Barium	ppm	ASTM D5185(m)	1	<b>&lt;1</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)		<b>27</b>	6	2
Manganese	ppm	ASTM D5185(m)		<b>3</b>	0	1
Magnesium	ppm	ASTM D5185(m)	1	<b>8</b>	<1	5
Calcium	ppm	ASTM D5185(m)	7	<b>81</b>	37	119
Phosphorus	ppm	ASTM D5185(m)	1145	<b>3426</b>	2281	2325
Zinc	ppm	ASTM D5185(m)	3	<b>45</b>	18	71
Sulfur	ppm	ASTM D5185(m)	17909	<b>22752</b>	25568	24408
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	<b>126</b>	177	171

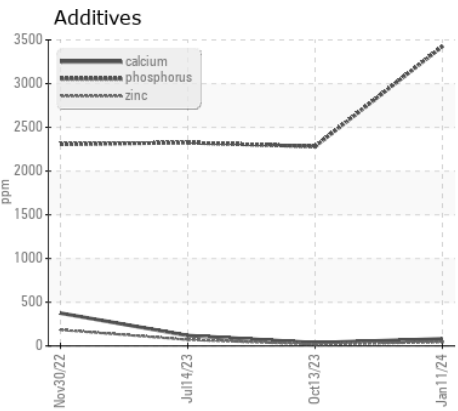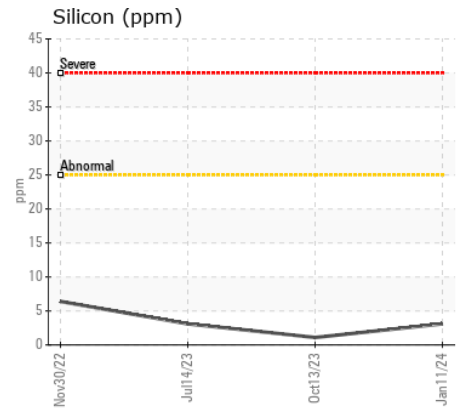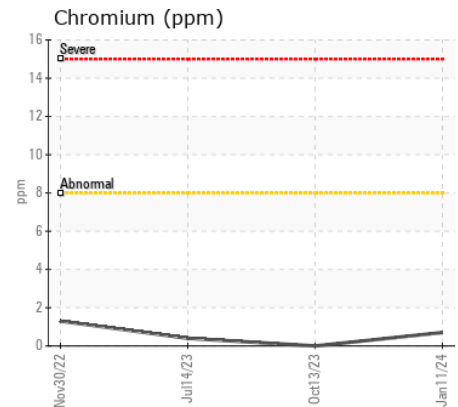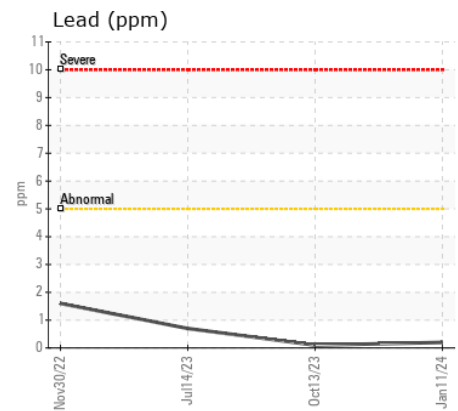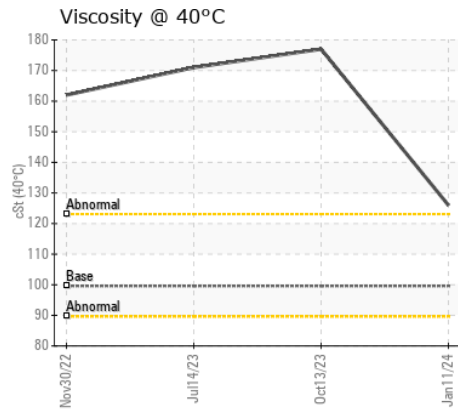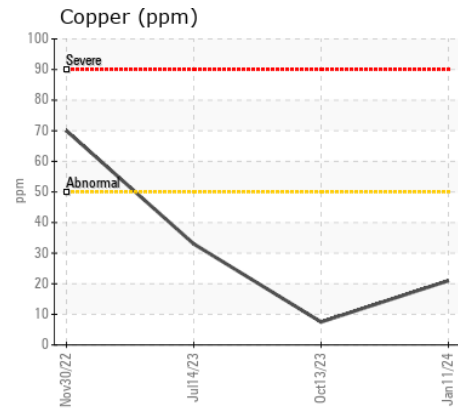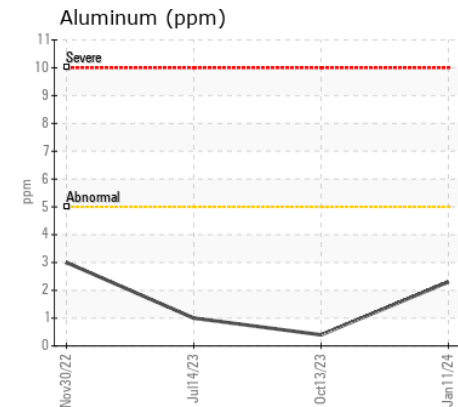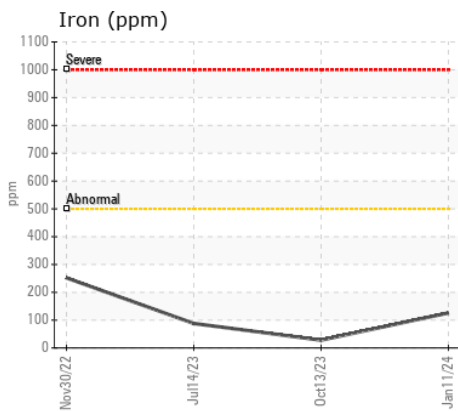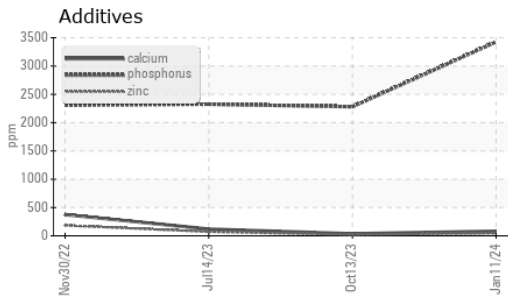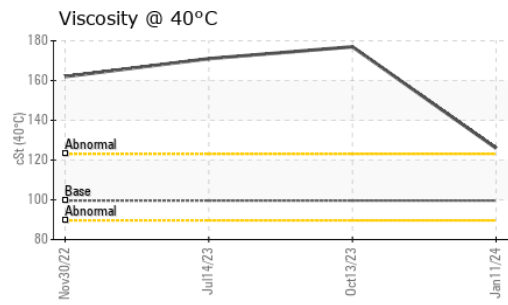

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **THOMAS CAVANAGH CONSTRUCTION LTD**  
**Sample No.** : LH0278838 **Recieved** : 17 Jan 2024 **RR # 2, 9094 CAVANAGH ROAD**  
**Lab Number** : 02609519 **Diagnosed** : 18 Jan 2024 **ASHTON, ON**  
**Unique Number** : 5710605 **Diagnostician** : Kevin Marson **CA K0A 1B0**  
**Test Package** : MOB 1 **Contact:** Keith

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T: (613)257-4995  
 F: (613)253-0071