



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**7236**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (36 LTR)**

**RECOMMENDATION**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0103733</b>	GFL0097108	GFL0088822
Sample Date		Client Info		<b>11 Jan 2024</b>	24 Oct 2023	17 Aug 2023
Machine Age	hrs	Client Info		<b>19280</b>	18690	281209
Oil Age	hrs	Client Info		<b>0</b>	600	0
Filter Age	hrs	Client Info		<b>0</b>	600	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>120	<b>3</b>	3	4
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	<1	1
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	2	3
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	0	1
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>4	<b>0</b>	0.1	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.9</b>	7.8	8.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.3</b>	19.4	20.5
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		<b>5</b>	6	7
Boron	ppm	ASTM D5185(m)	2	<b>1</b>	2	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>53</b>	55	56
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	950	<b>870</b>	875	949
Calcium	ppm	ASTM D5185(m)	1050	<b>982</b>	1039	1013
Phosphorus	ppm	ASTM D5185(m)	995	<b>925</b>	941	1017
Zinc	ppm	ASTM D5185(m)	1180	<b>1069</b>	1117	1153
Sulfur	ppm	ASTM D5185(m)	2600	<b>2504</b>	2394	2415
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.4</b>	15.4	15.5
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>10.7</b>	11.0	11.3

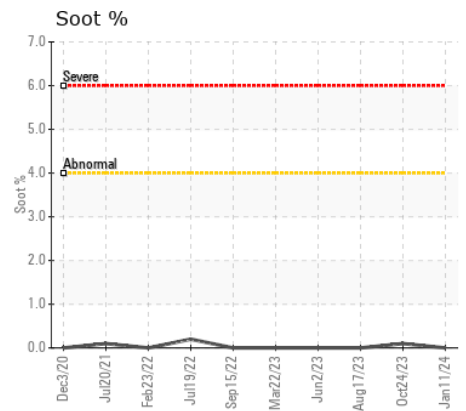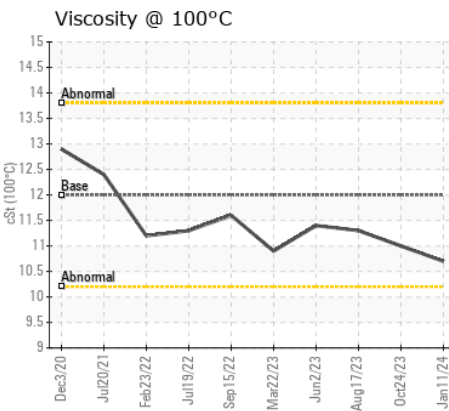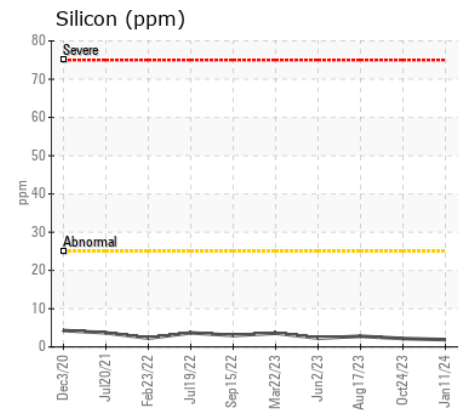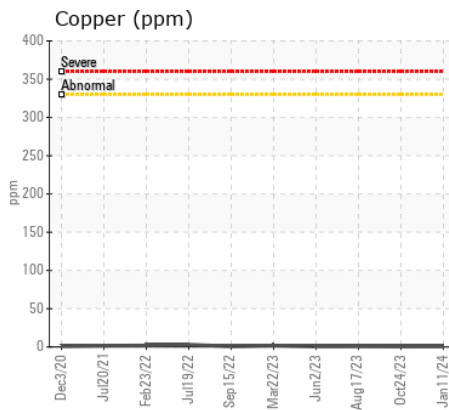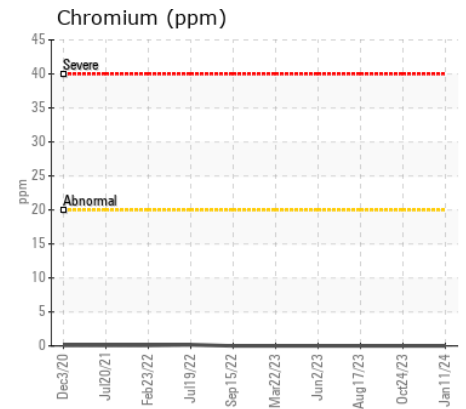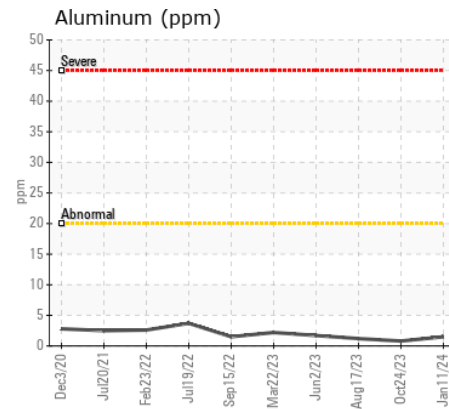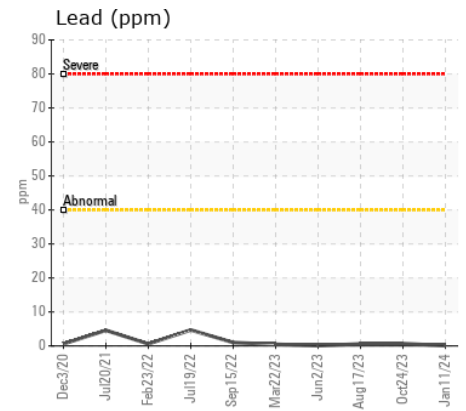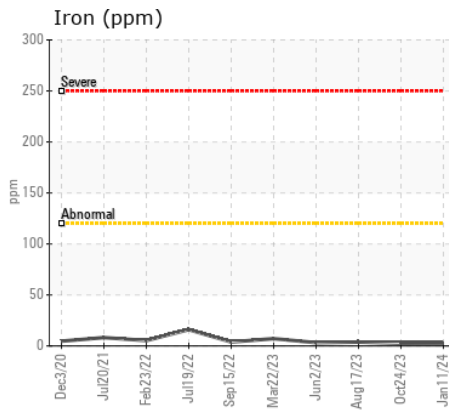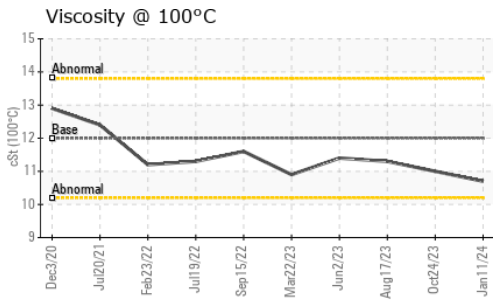

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 780 - GMA - ICI - Solid Waste  
**Sample No.** : GFL0103733 **Received** : 18 Jan 2024  
**Lab Number** : 02609685 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 5710771 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

4365 boul. St-Elzear Ouest,  
 Laval, QC  
 CA H7P 4J3  
 Contact: Pieces Laval  
 pieces.laval@gflenv.com  
 T: (450)687-3838  
 F: