



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
813106
Component
Transmission (Auto)
Fluid
DEXRON III (--- LTR)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|------------------|--------|---------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | GFL0079080 | --- | --- |
| Sample Date | | Client Info | | 16 Jan 2024 | --- | --- |
| Machine Age | kms | Client Info | | 34978 | --- | --- |
| Oil Age | kms | Client Info | | 0 | --- | --- |
| Filter Age | kms | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | N/A | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |
| Iron | ppm | ASTM D5185(m) | >160 | 80 | --- | --- |
| Chromium | ppm | ASTM D5185(m) | >5 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185(m) | >5 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | >5 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) | >50 | 35 | --- | --- |
| Lead | ppm | ASTM D5185(m) | >50 | 6 | --- | --- |
| Copper | ppm | ASTM D5185(m) | >225 | 6 | --- | --- |
| Tin | ppm | ASTM D5185(m) | >10 | 5 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| White Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Silicon | ppm | ASTM D5185(m) | >20 | 6 | --- | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | 4 | --- | --- |
| Water | | WC Method | >0.1 | NEG | --- | --- |
| Silt | scalar | Visual* | NONE | NONE | --- | --- |
| Debris | scalar | Visual* | NONE | VLITE | --- | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- | --- |
| Odor | scalar | Visual* | NORML | NORML | --- | --- |
| Emulsified Water | scalar | Visual* | >0.1 | NEG | --- | --- |
| Sodium | ppm | ASTM D5185(m) | | 10 | --- | --- |
| Boron | ppm | ASTM D5185(m) | | 72 | --- | --- |
| Barium | ppm | ASTM D5185(m) | | <1 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | | 2 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | | 2 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | | 72 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | | 253 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | | 9 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | | 1084 | --- | --- |
| Visc @ 40°C | cSt | ASTM D7279(m) | 26.0 | 33.9 | --- | --- |

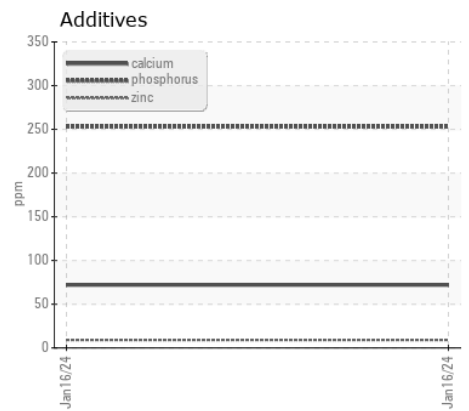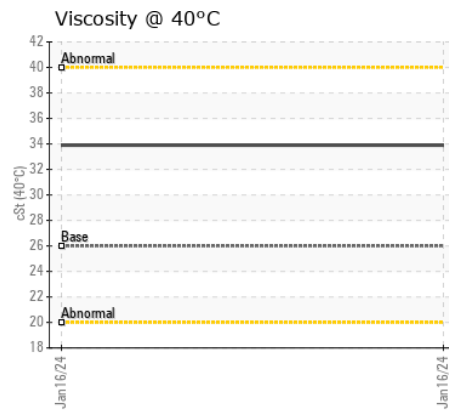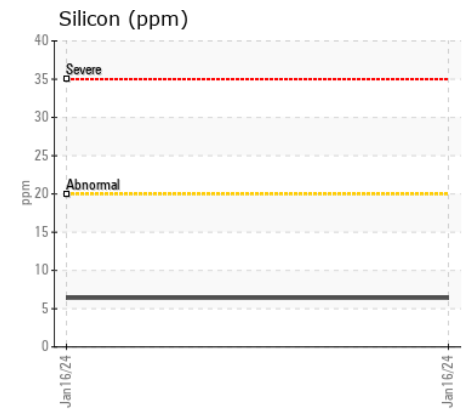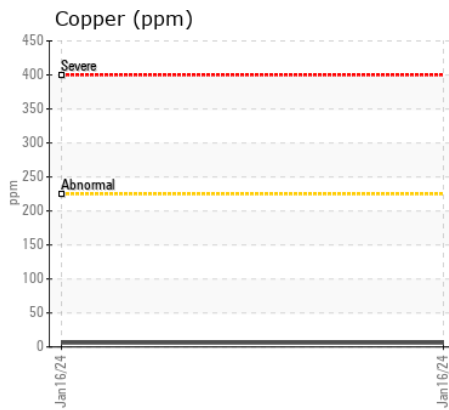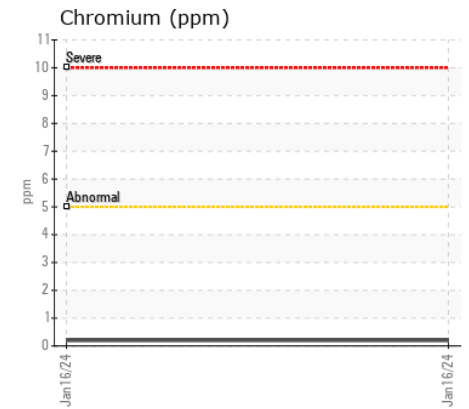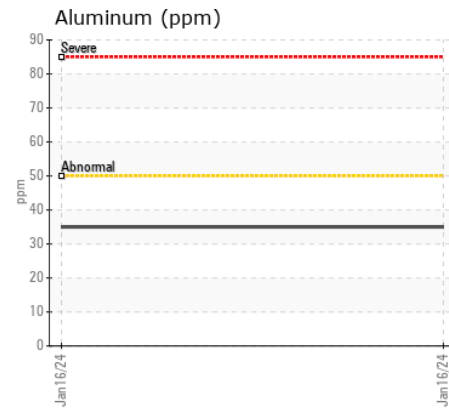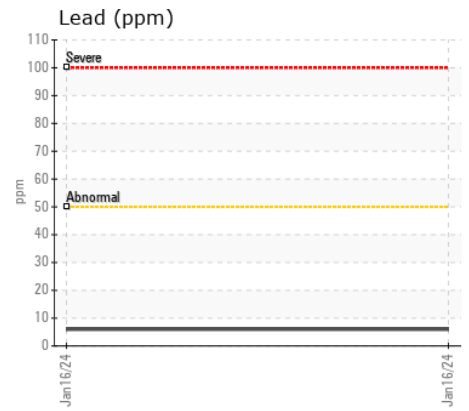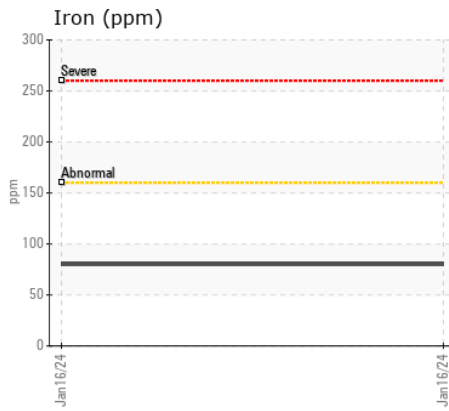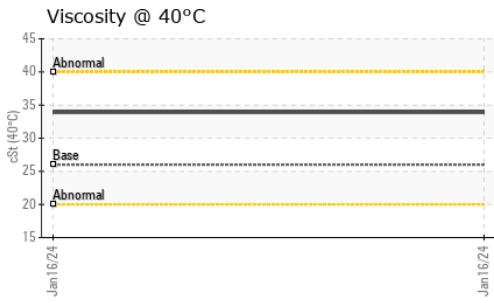

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0079080 **Received** : 18 Jan 2024
Lab Number : 02609726 **Diagnosed** : 18 Jan 2024
Unique Number : 5710812 **Diagnostician** : Wes Davis
Test Package : MOB 1

Matrec - 791 - Rimouski
 350 Avenue de L'Industrie
 Rimouski, QC
 CA G5M 1W4
 Contact: Daniel Cloutier
 dacloutier@gflenv.com
 T: (418)724-6447 poste 4142
 F: (418)388-2038

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.