



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50M 124712-1216
Component
Rear Differential
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0277307	LH0277343	LH0265504
Sample Date		Client Info		16 Jan 2024	17 Oct 2023	07 Jun 2023
Machine Age	hrs	Client Info		12176	11300	10063
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>190	19	16	17
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>15	0	0	0
Copper	ppm	ASTM D5185(m)	>70	<1	2	1
Tin	ppm	ASTM D5185(m)	>2	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>20	2	2	1
Potassium	ppm	ASTM D5185(m)	>20	1	0	<1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)	>170	<1	2	1
Boron	ppm	ASTM D5185(m)	400	<1	3	<1
Barium	ppm	ASTM D5185(m)	200	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	12	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	12	<1	2	0
Calcium	ppm	ASTM D5185(m)	150	6	5	0
Phosphorus	ppm	ASTM D5185(m)	1650	2214	2300	2483
Zinc	ppm	ASTM D5185(m)	125	4	6	3
Sulfur	ppm	ASTM D5185(m)	22500	24064	25400	27379
Visc @ 40°C	cSt	ASTM D7279(m)	143	194	191	188

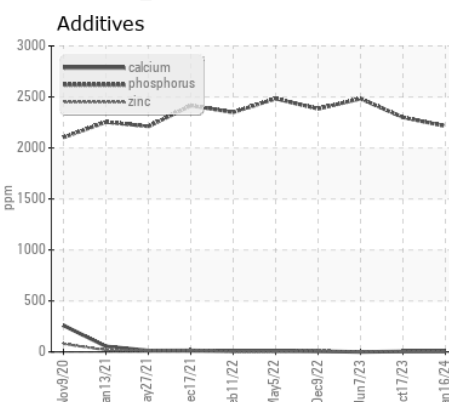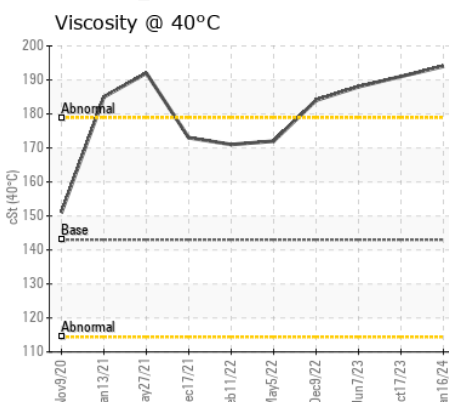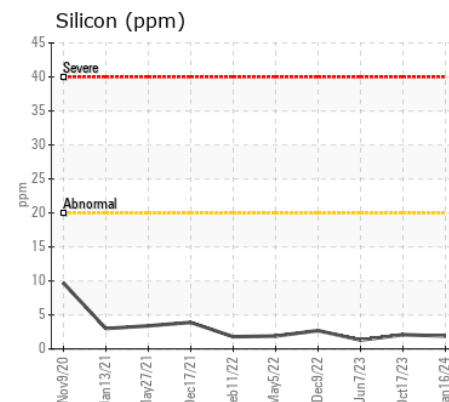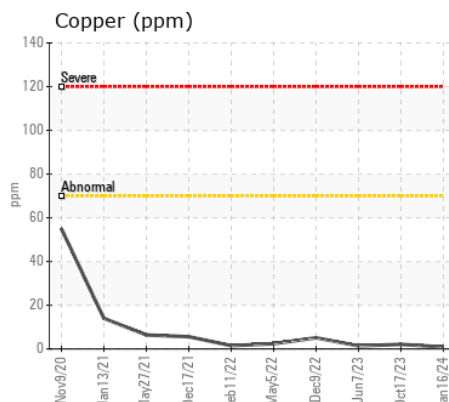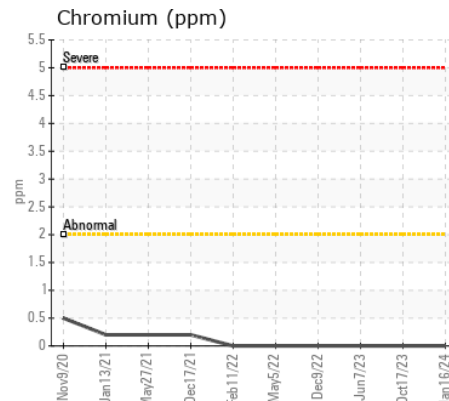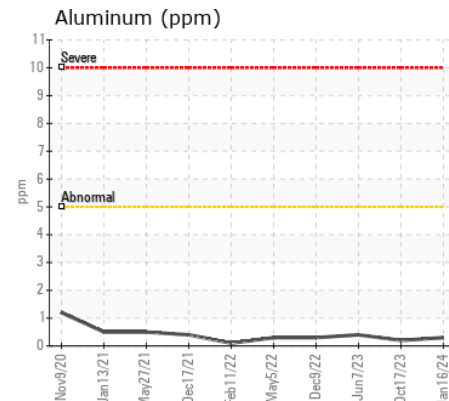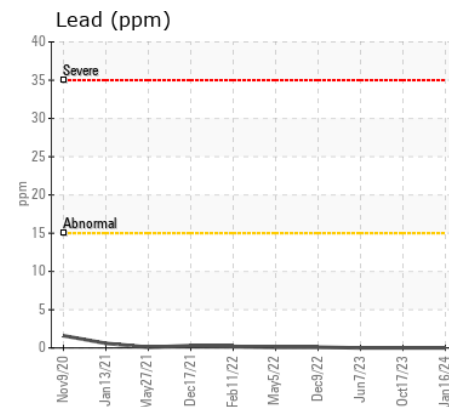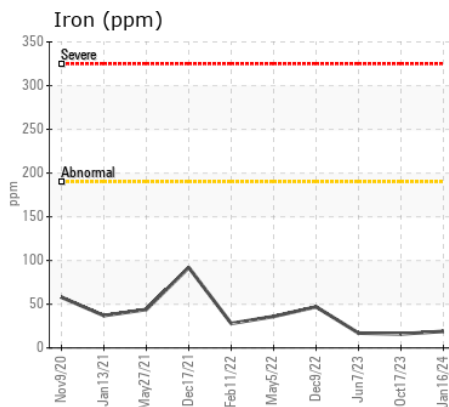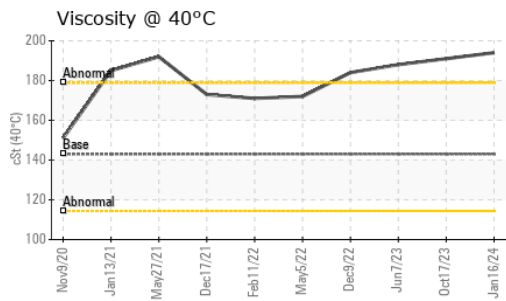

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0277307 **Received** : 18 Jan 2024
Lab Number : 02609750 **Diagnosed** : 18 Jan 2024
Unique Number : 5710836 **Diagnostician** : Wes Davis
Test Package : MOB 1

SCIERIE DION & FILS INC
 147 RUE ST-ALEXIS
 ST. RAYMOND, QC
 CA G3L 1S1
 Contact: Marc Lamarre
 mlamarre@scieriedion.com
 T: (418)337-2265
 F: (418)337-4142

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.