



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR LH50M 124712-1216**  
Component  
**Swing Drive**  
Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

### RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0277311</b>	LH0277342	LH0265507
Sample Date		Client Info		<b>16 Jan 2024</b>	17 Oct 2023	07 Jun 2023
Machine Age	hrs	Client Info		<b>12176</b>	11300	10063
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>1450	<b>86</b>	111	61
Chromium	ppm	ASTM D5185(m)	>11	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	<1
Lead	ppm	ASTM D5185(m)	>4	<b>2</b>	3	3
Copper	ppm	ASTM D5185(m)	>542	<b>113</b>	147	137
Tin	ppm	ASTM D5185(m)	>38	<b>8</b>	12	8
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE

### CONTAMINATION










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>15	<b>1</b>	2	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	0	<1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	VLITE	VLITE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)	>170	<b>&lt;1</b>	5	<1
Boron	ppm	ASTM D5185(m)	400	<b>0</b>	2	3
Barium	ppm	ASTM D5185(m)	200	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	12	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	12	<b>2</b>	2	<1
Calcium	ppm	ASTM D5185(m)	150	<b>7</b>	4	4
Phosphorus	ppm	ASTM D5185(m)	1650	<b>2248</b>	2260	2438
Zinc	ppm	ASTM D5185(m)	125	<b>15</b>	16	9
Sulfur	ppm	ASTM D5185(m)	22500	<b>23968</b>	24871	27482
Visc @ 40°C	cSt	ASTM D7279(m)	143	<b>192</b>	191	179

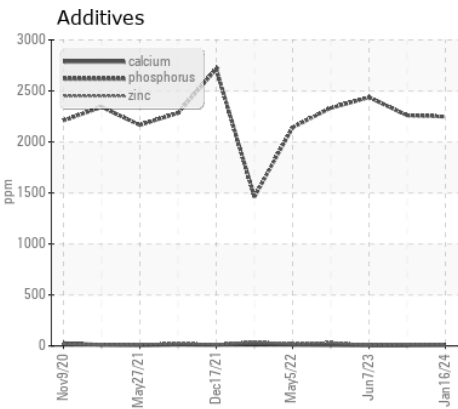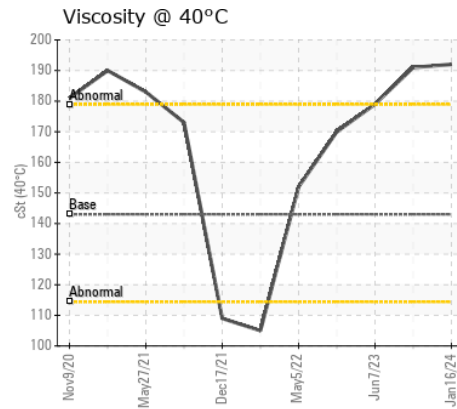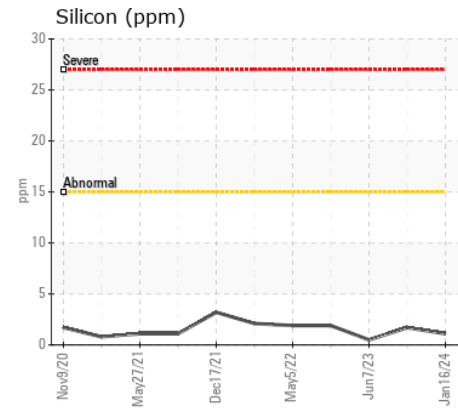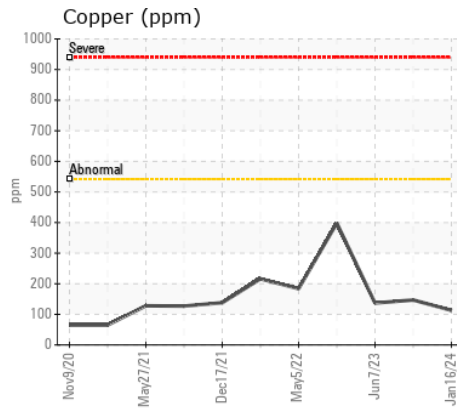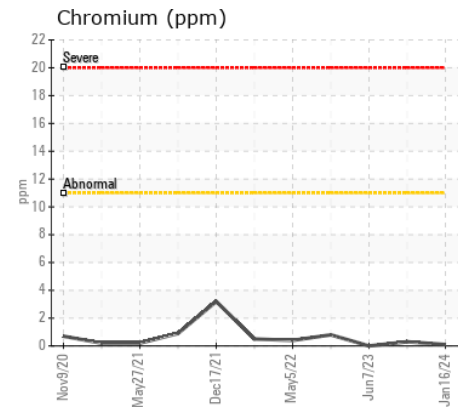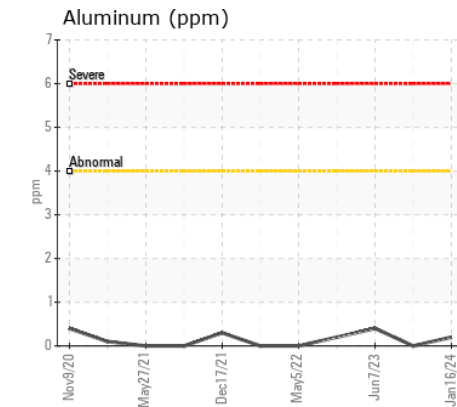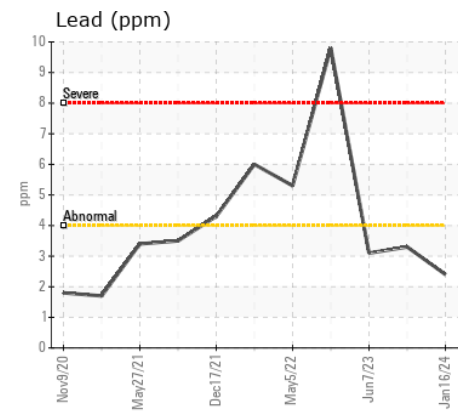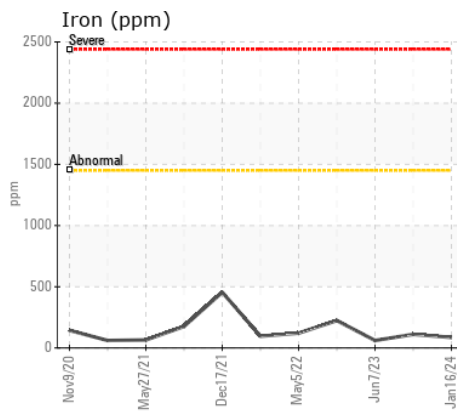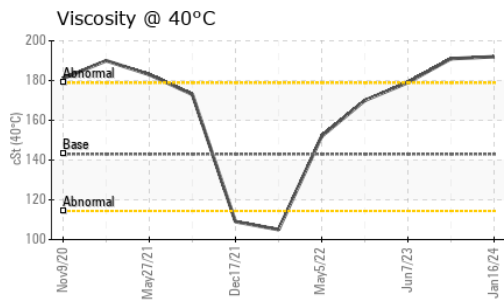

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0277311 **Received** : 18 Jan 2024  
**Lab Number** : 02609765 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 5710851 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**SCIERIE DION & FILS INC**  
 147 RUE ST-ALEXIS  
 ST.RAYMOND, QC  
 CA G3L 1S1  
 Contact: Marc Lamarre  
 mlamarre@scieriedion.com  
 T: (418)337-2265  
 F: (418)337-4142

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.