



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR LH50M 145793-1216**

Component  
**Rear Differential**

Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

### RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH</b>	LH	LH
Sample Date		Client Info		<b>16 Jan 2024</b>	30 Nov 2023	11 Oct 2023
Machine Age	hrs	Client Info		<b>6000</b>	5000	4000
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>None</b>	None	None
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>190	<b>28</b>	47	51
Chromium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>15	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>70	<b>1</b>	2	5
Tin	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	2	1
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	2
Boron	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	<1	<b>&lt;1</b>	<1	0
Calcium	ppm	ASTM D5185(m)	<1	<b>2</b>	3	5
Phosphorus	ppm	ASTM D5185(m)	2143	<b>2272</b>	2293	2294
Zinc	ppm	ASTM D5185(m)	<1	<b>4</b>	4	6
Sulfur	ppm	ASTM D5185(m)	23468	<b>25235</b>	24323	26524
Visc @ 40°C	cSt	ASTM D7279(m)	170	<b>182</b>	189	177

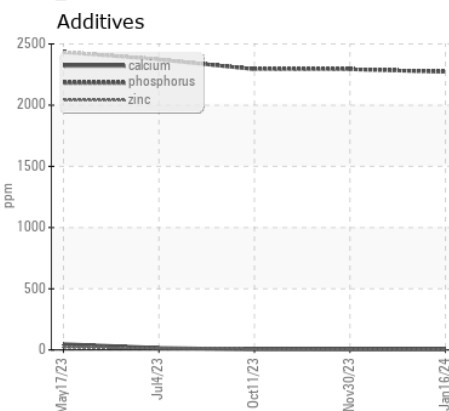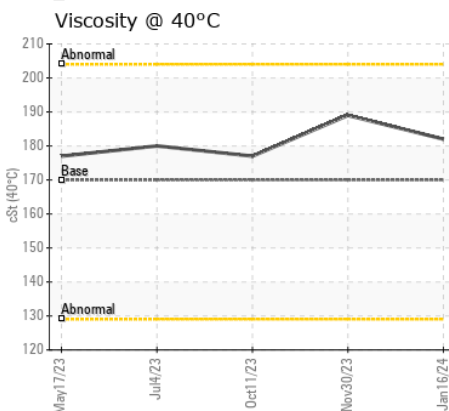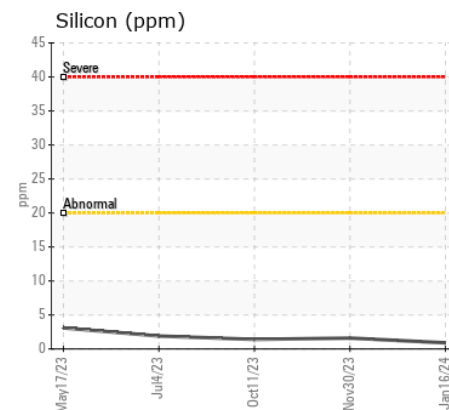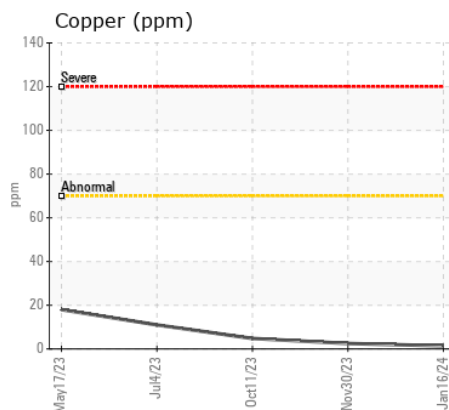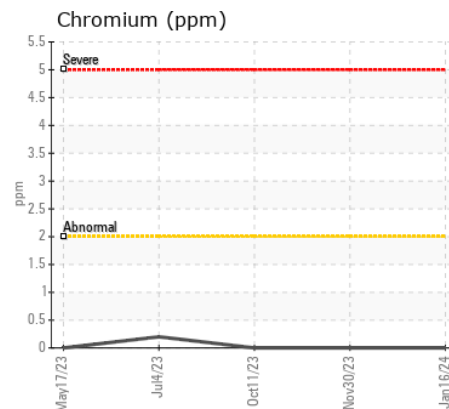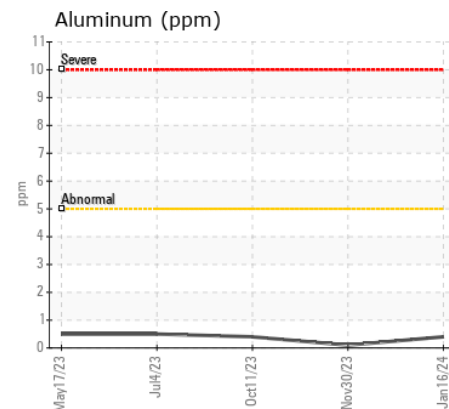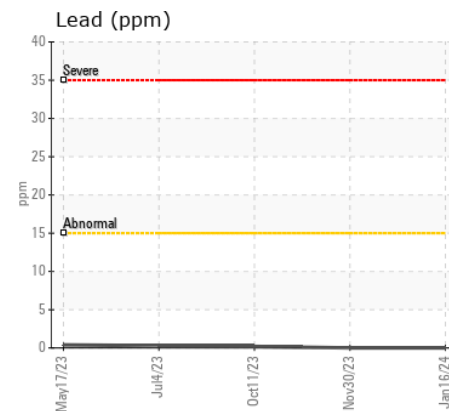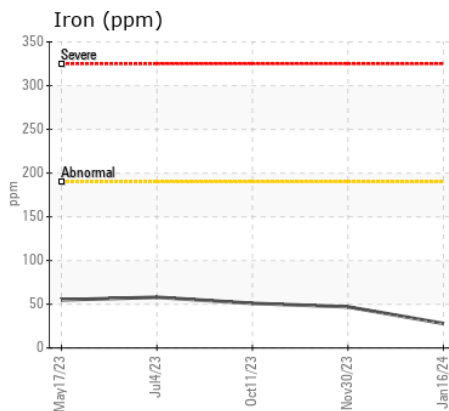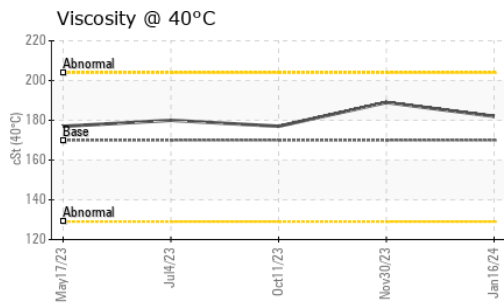

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH **Received** : 19 Jan 2024  
**Lab Number** : 02610019 **Diagnosed** : 19 Jan 2024  
**Unique Number** : 5711105 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**PF Resolu Canada Inc.**  
 5850 avenue des jardins  
 La Dore, QC  
 CA G8J 1B4  
 Contact: Dominic Caron

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: