



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
4531
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0102635	GFL0085804	GFL0072862
Sample Date		Client Info		04 Jan 2024	03 Aug 2023	24 Feb 2023
Machine Age	hrs	Client Info		23913	23814	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>110	4	20	31
Chromium	ppm	ASTM D5185(m)	>4	0	<1	1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>25	2	4	3
Lead	ppm	ASTM D5185(m)	>45	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>85	1	1	3
Tin	ppm	ASTM D5185(m)	>4	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	5	4	5
Potassium	ppm	ASTM D5185(m)	>20	4	15	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	0.0	NEG
Soot %	%	ASTM D7844*	>3	0	0.4	0.5
Nitration	Abs/cm	ASTM D7624*	>20	4.7	8.5	10.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.0	22.4	22.8
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		68	85	20
Boron	ppm	ASTM D5185(m)	2	2	2	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	59	59	60
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	931	911	961
Calcium	ppm	ASTM D5185(m)	1050	1001	970	1089
Phosphorus	ppm	ASTM D5185(m)	995	991	1010	1060
Zinc	ppm	ASTM D5185(m)	1180	1124	1112	1172
Sulfur	ppm	ASTM D5185(m)	2600	2748	2465	2584
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.2	19.1	18.1
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.3	10.7	10.7

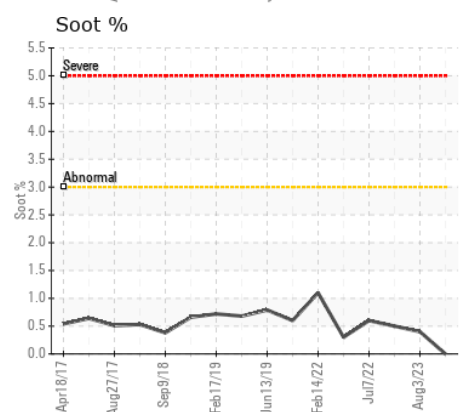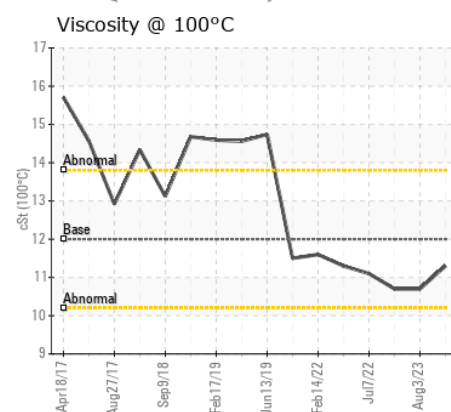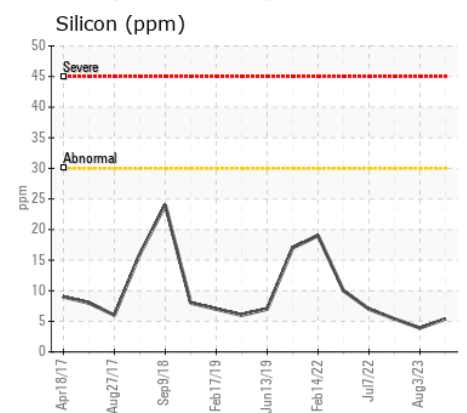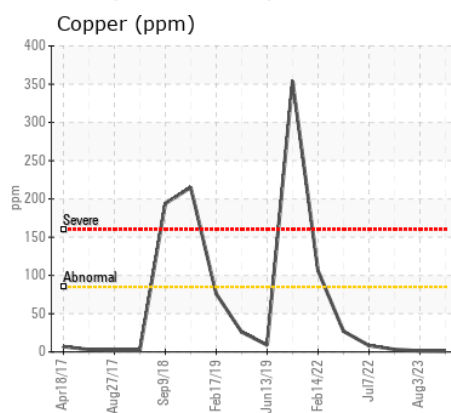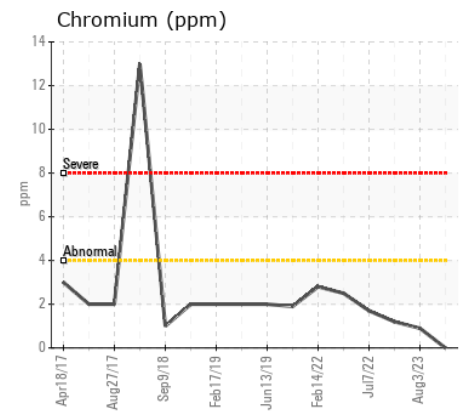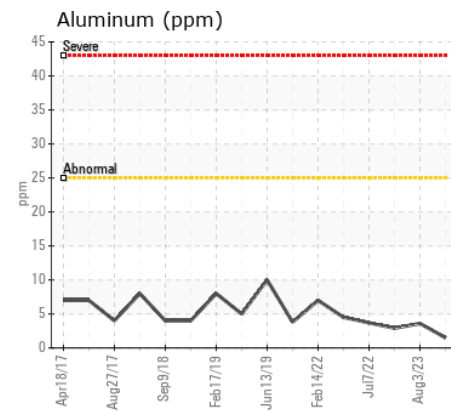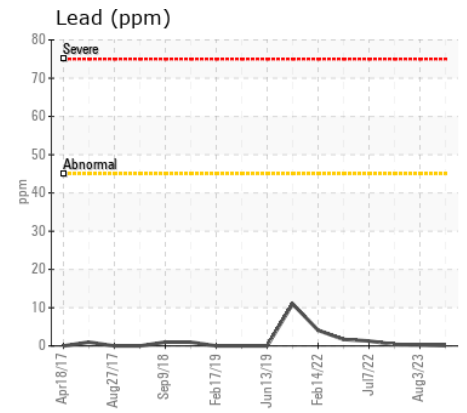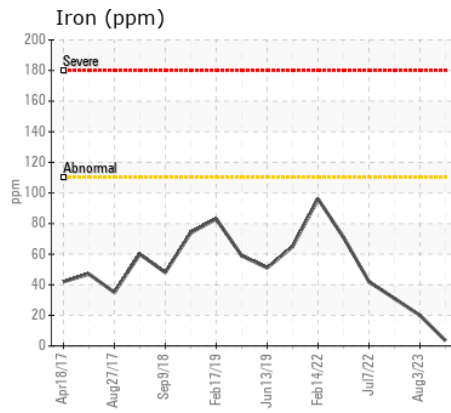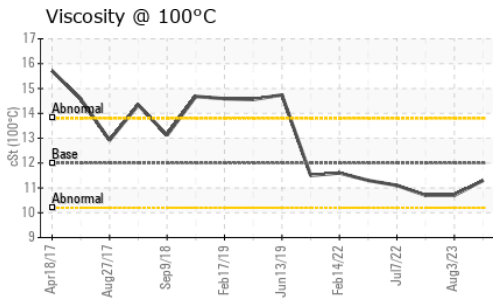

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0102635 **Received** : 22 Jan 2024
Lab Number : 02610164 **Diagnosed** : 22 Jan 2024
Unique Number : 5711250 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F: