



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
NO UNIT VCP449445

Component
Diesel Engine

Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449445	---	---
Sample Date		Client Info		21 Jan 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		1348	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	10	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	2	---	---
Copper	ppm	ASTM D5185(m)	>330	17	---	---
Tin	ppm	ASTM D5185(m)	>15	1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION











Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	6	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Fuel	%	ASTM D7593*	>5	0.9	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	11.7	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.5	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	2.5	17	---	---
Barium	ppm	ASTM D5185(m)	0.0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0.7	36	---	---
Manganese	ppm	ASTM D5185(m)	0.0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	256	381	---	---
Calcium	ppm	ASTM D5185(m)	2057	1826	---	---
Phosphorus	ppm	ASTM D5185(m)	935	822	---	---
Zinc	ppm	ASTM D5185(m)	1223	1086	---	---
Sulfur	ppm	ASTM D5185(m)	4079	2505	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	23.7	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	12.5	---	---

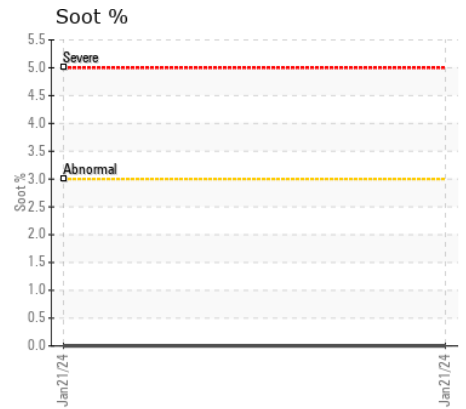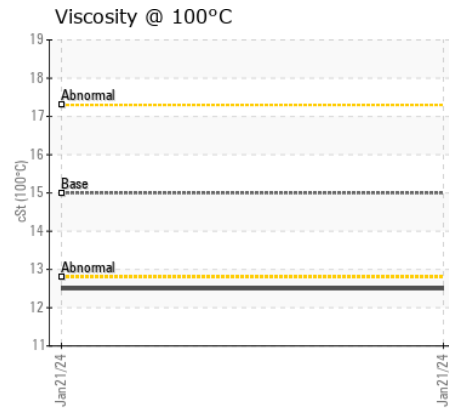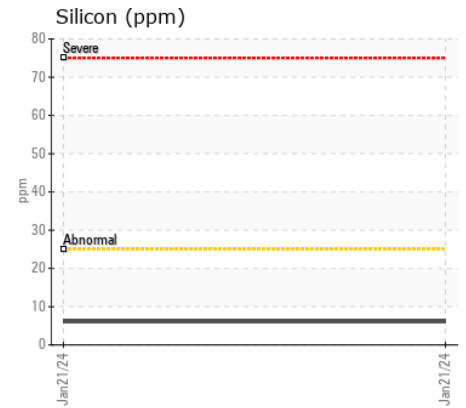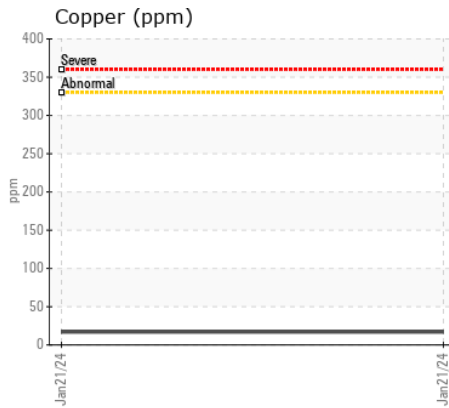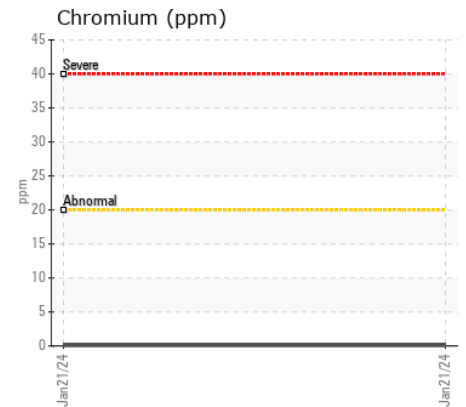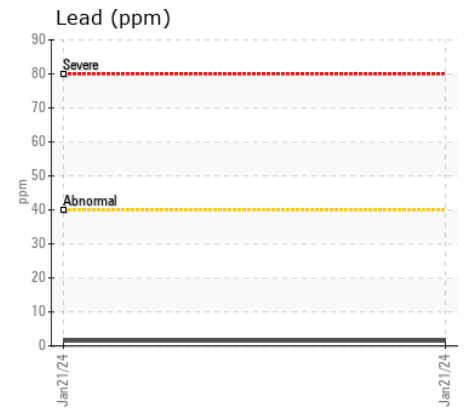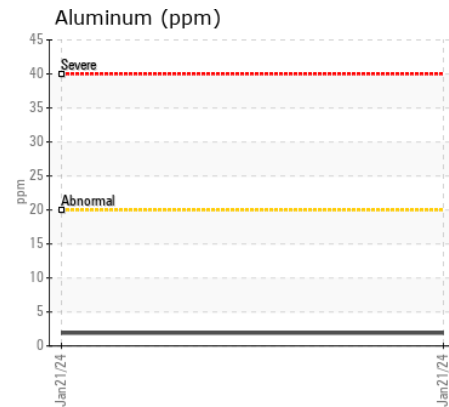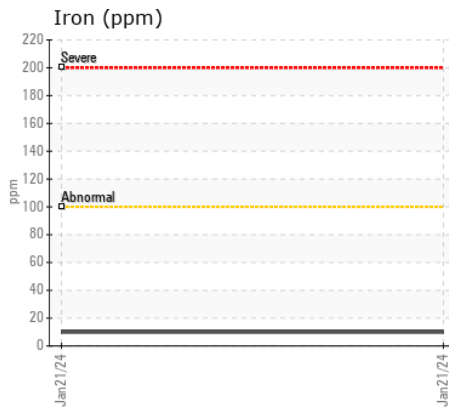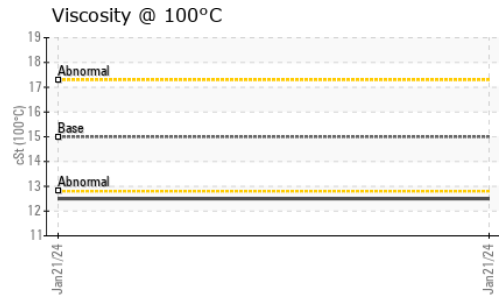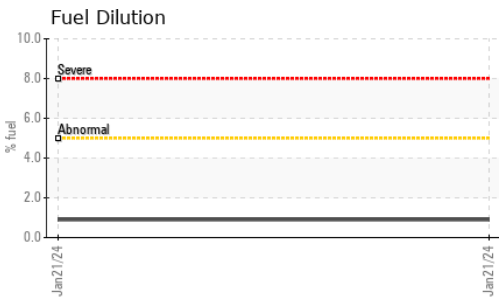

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP449445 **Received** : 22 Jan 2024
Lab Number : 02610278 **Diagnosed** : 23 Jan 2024
Unique Number : 5711364 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)

STRONGCO EQUIPMENT INC.
 55 ISNOR DRIVE, BURNSIDE INDUSTRIALPARK
 DARTMOUTH, NS
 CA B3B 1N6
 Contact: Lindsay Downs
 ldowns@strongco.com
 T: (902)468-5010
 F: (902)468-2468

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.