



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JCB BACKHOE SLP214TCVE0460532
 Component
Transmission (Manual)
 Fluid
CAT TDTO 10W (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. The fluid was specified as CAT TDTO 10W, however, a fluid match indicates that this fluid is SAE 20 Transmission/Drive Train Oil. Please confirm the fluid type and grade on your next sample.

WEAR

All component wear rates are normal.












CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of fluid. The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0045078	---	---
Sample Date		Client Info		29 Dec 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
<hr/>						
Iron	ppm	ASTM D5185(m)	>200	92	---	---
Chromium	ppm	ASTM D5185(m)	>5	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>7	0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	2	---	---
Lead	ppm	ASTM D5185(m)	>45	4	---	---
Copper	ppm	ASTM D5185(m)	>225	90	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
<hr/>						
Silicon	ppm	ASTM D5185(m)	>125	7	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
<hr/>						
Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)		21	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		<1	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		21	---	---
Calcium	ppm	ASTM D5185(m)	2980	1445	---	---
Phosphorus	ppm	ASTM D5185(m)	1100	821	---	---
Zinc	ppm	ASTM D5185(m)	1270	954	---	---
Sulfur	ppm	ASTM D5185(m)		2519	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	42.0	38.9	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	6.3	6.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	97	114	---	---

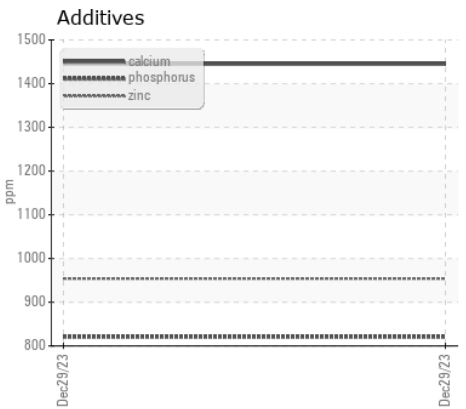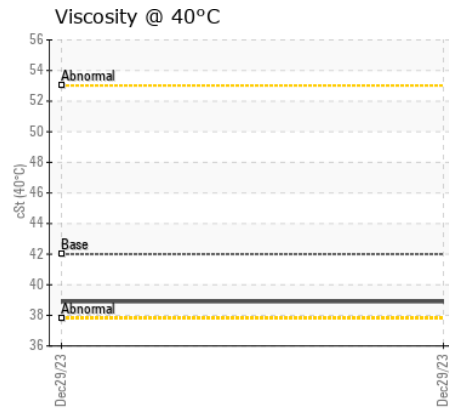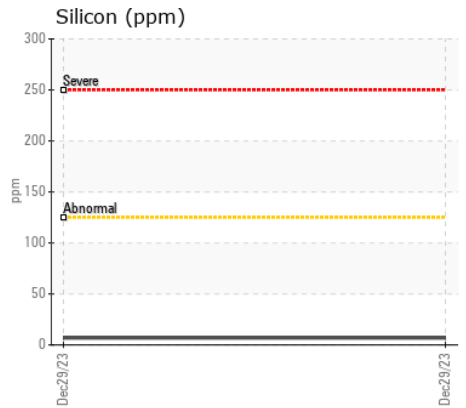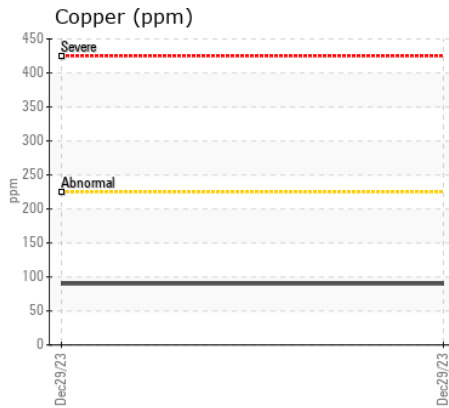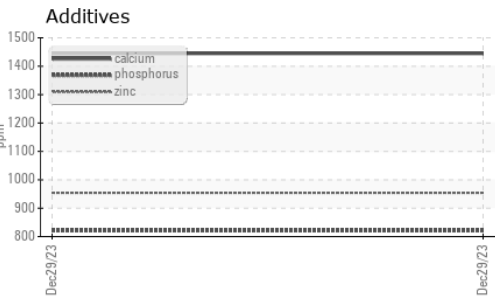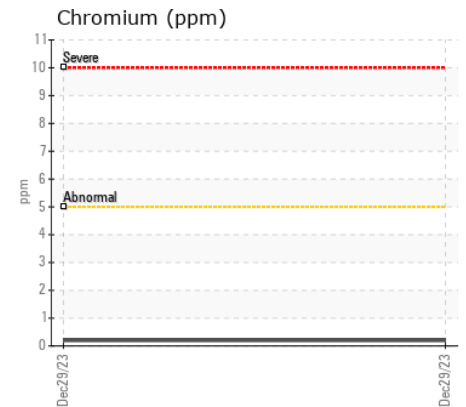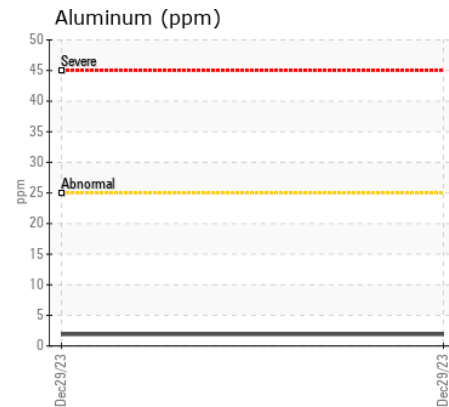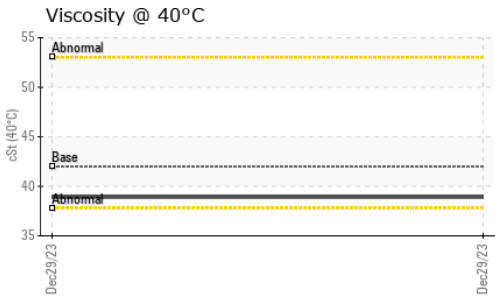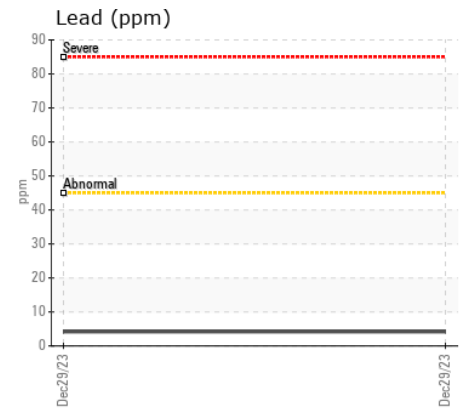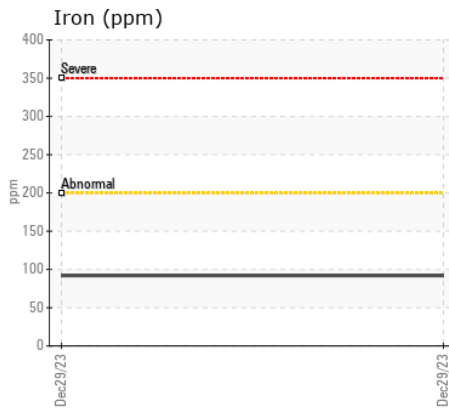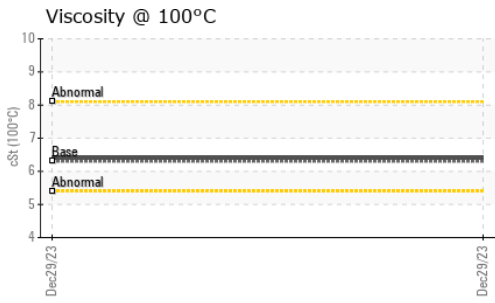

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0045078 **Received** : 22 Jan 2024
Lab Number : 02610327 **Diagnosed** : 22 Jan 2024
Unique Number : 5711413 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

WYMARK COLONY
 BOX 876
 SWIFT CURRENT, SK
 CA S9H 3W8
 Contact: Dave Entz
 rrewymark@sasktel.net
 T: (306)773-7290
 F: