



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L566 036511-1168

Component
Rear Differential

Fluid
PETRO CANADA TRAXON SYNTHETIC 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0278892	LH0239192	LH0202977
Sample Date		Client Info		21 Jan 2024	07 Nov 2022	30 Sep 2021
Machine Age	hrs	Client Info		14008	11757	10700
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>1200	83	80	94
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		<1	0	<1
Aluminum	ppm	ASTM D5185(m)	>5	<1	0	<1
Lead	ppm	ASTM D5185(m)	>4	0	0	0
Copper	ppm	ASTM D5185(m)	>40	1	<1	1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	3	2	3
Potassium	ppm	ASTM D5185(m)	>20	<1	0	3
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	<1	2
Boron	ppm	ASTM D5185(m)	328	293	297	289
Barium	ppm	ASTM D5185(m)	1	<1	0	0
Molybdenum	ppm	ASTM D5185(m)		7	6	11
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	1	2	1	3
Calcium	ppm	ASTM D5185(m)	7	11	15	11
Phosphorus	ppm	ASTM D5185(m)	1145	2513	2639	3048
Zinc	ppm	ASTM D5185(m)	3	10	11	9
Sulfur	ppm	ASTM D5185(m)	17909	20095	19843	18483
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	95.4	97.2	91.8

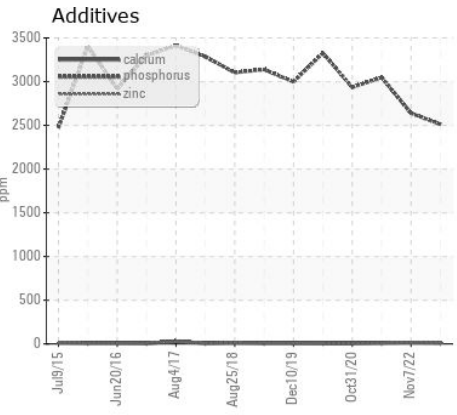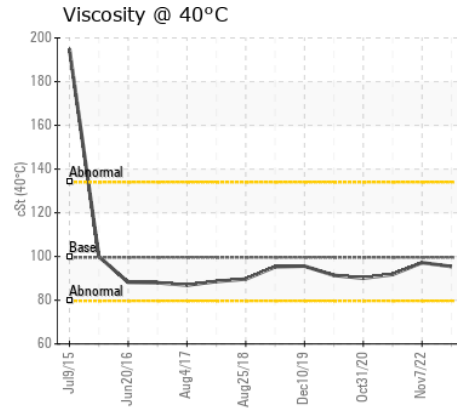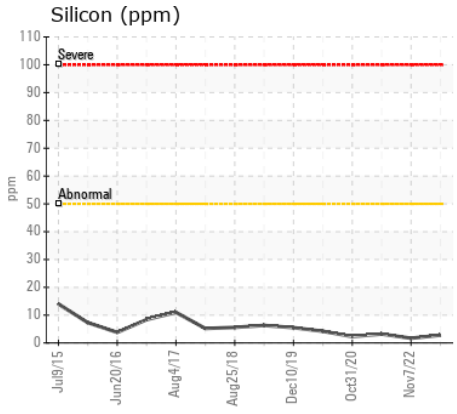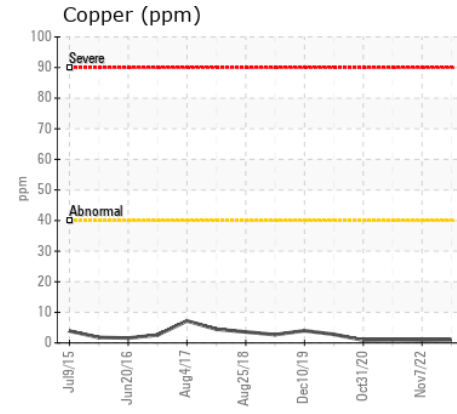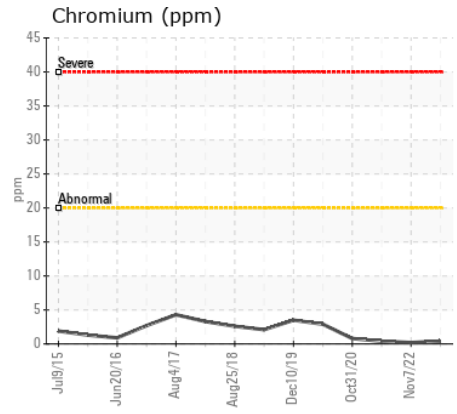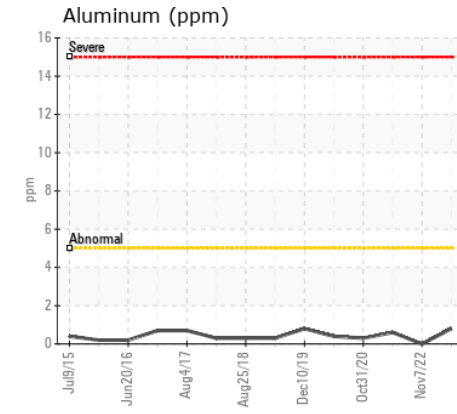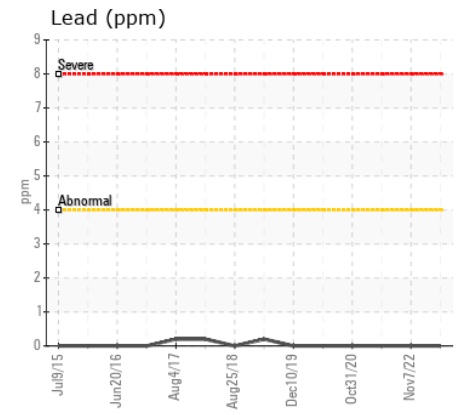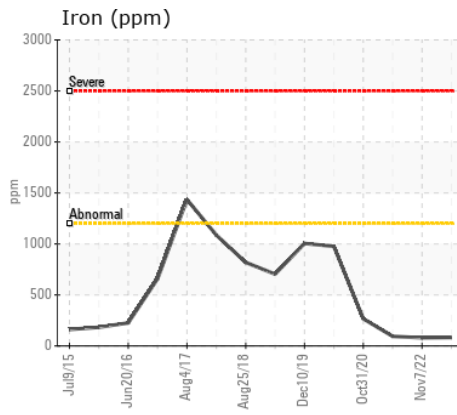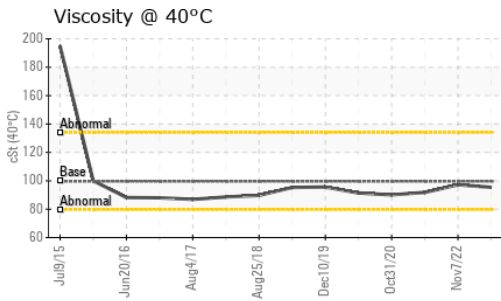

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0278892 **Received** : 22 Jan 2024
Lab Number : 02610372 **Diagnosed** : 22 Jan 2024
Unique Number : 5711458 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Summit Aggregates
 2686 Greenfield Blvd.
 Ayr, ON
 CA N0B 1E0
 Contact: Greg .
 greg@summitagg.com
 T: (226)791-0161
 F: