



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
R24027
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0100592	---	---
Sample Date		Client Info		17 Jan 2024	---	---
Machine Age	kms	Client Info		0	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	26	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	16	---	---
Copper	ppm	ASTM D5185(m)	>330	9	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Fuel		WC Method	>2.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.2	---	---
Nitration	Abs/cm	ASTM D7624*	>20	10.7	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.7	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	2	---	---
Boron	ppm	ASTM D5185(m)	250	45	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	100	36	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	450	556	---	---
Calcium	ppm	ASTM D5185(m)	3000	1630	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	995	---	---
Zinc	ppm	ASTM D5185(m)	1350	1182	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2878	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.8	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.7	---	---

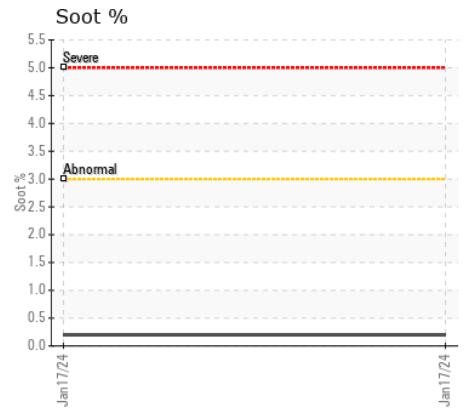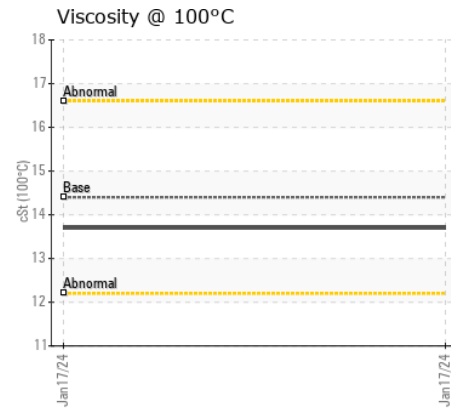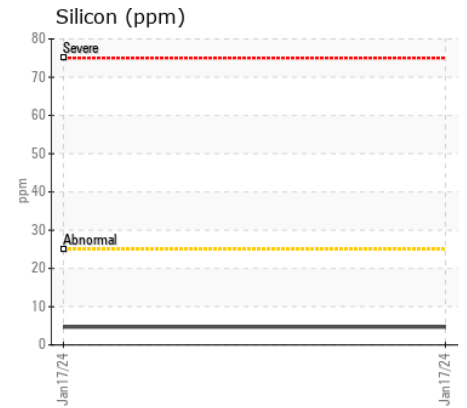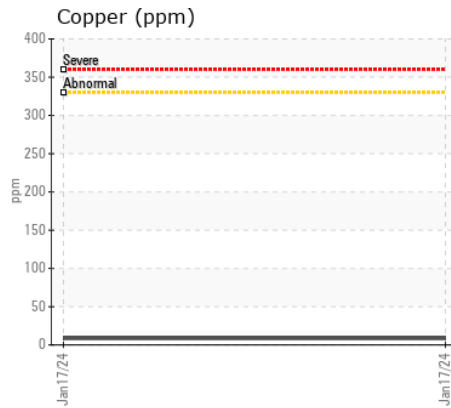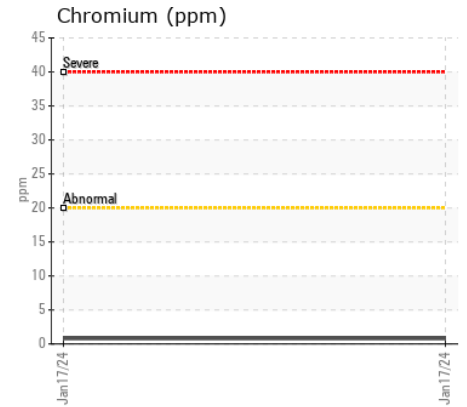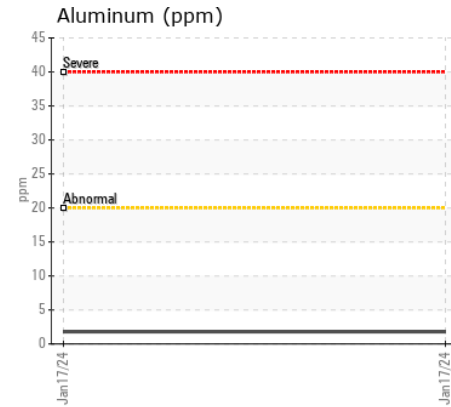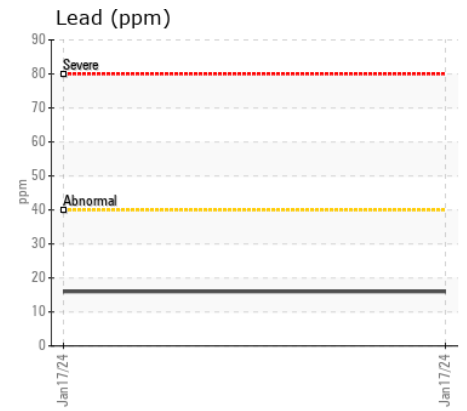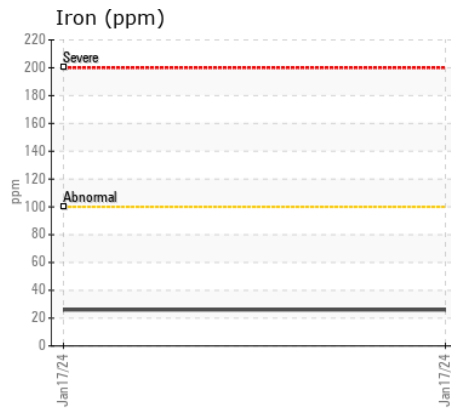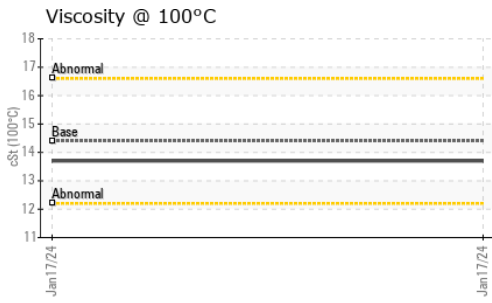

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 575 - Squamish Hauling
Sample No. : GFL0100592 **Received** : 23 Jan 2024 38950 Queens Way,
Lab Number : 02610495 **Diagnosed** : 23 Jan 2024 Squamish, BC
Unique Number : 5711581 **Diagnostician** : Wes Davis CA V8B 0K8
Test Package : MOB 1 Contact: Dean Imbeau
 dimbeau@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.