



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L580 040987-1170
Component
Diesel Engine
Fluid
PETRO CANADA 10W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0252142	LH0234745	LH0202865
Sample Date		Client Info		16 Jan 2024	11 Jul 2023	02 Mar 2023
Machine Age	hrs	Client Info		10169	9082	8565
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	14	17	22
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	<1	3
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	2	2	2
Lead	ppm	ASTM D5185(m)	>30	<1	2	2
Copper	ppm	ASTM D5185(m)	>125	2	9	10
Tin	ppm	ASTM D5185(m)	>5	<1	<1	1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	5	5	5
Potassium	ppm	ASTM D5185(m)	>20	<1	1	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	1.3	1.4	1.9
Nitration	Abs/cm	ASTM D7624*	>20	8.1	8.1	9.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.1	21.3	24.7
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>20	2	2	3
Boron	ppm	ASTM D5185(m)		<1	2	5
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		59	59	57
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)		966	990	936
Calcium	ppm	ASTM D5185(m)		1074	1065	1186
Phosphorus	ppm	ASTM D5185(m)		1013	1074	1095
Zinc	ppm	ASTM D5185(m)		1188	1226	1223
Sulfur	ppm	ASTM D5185(m)		2687	2541	2622
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.7	14.4	15.5
Visc @ 100°C	cSt	ASTM D7279(m)		15.0	14.0	12.8

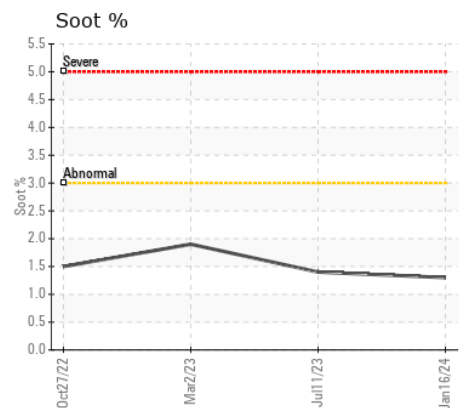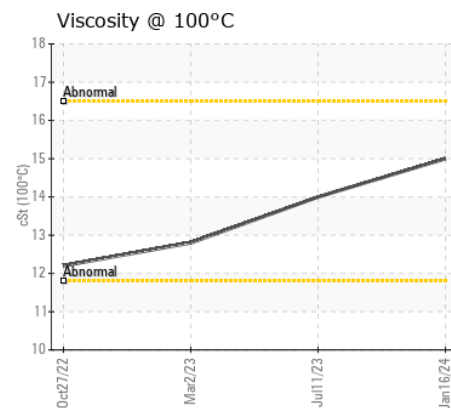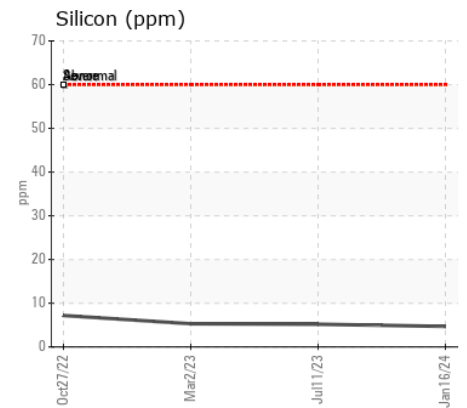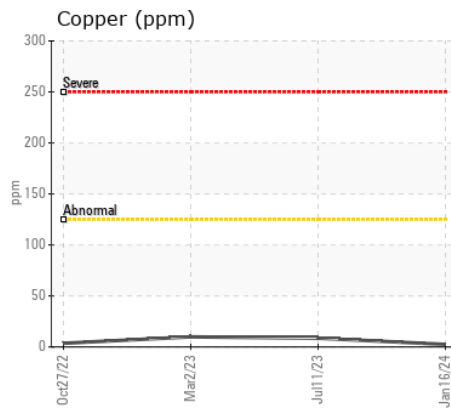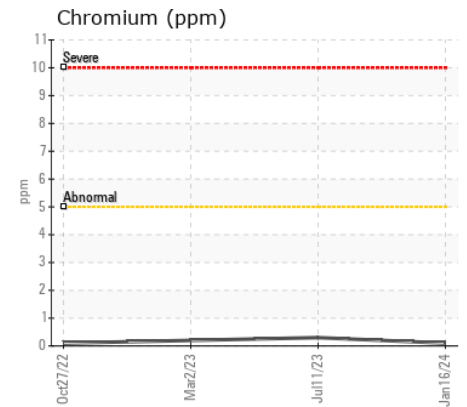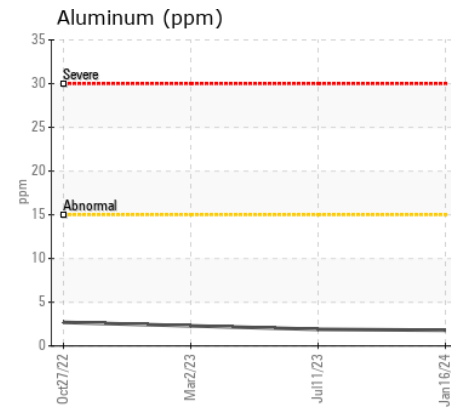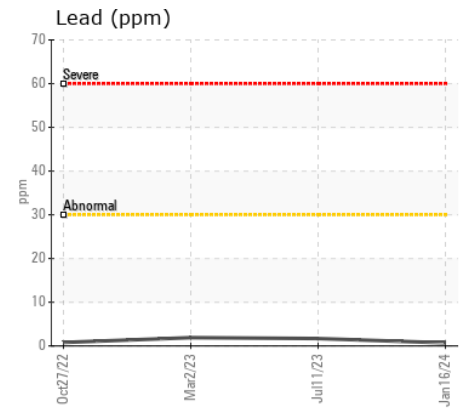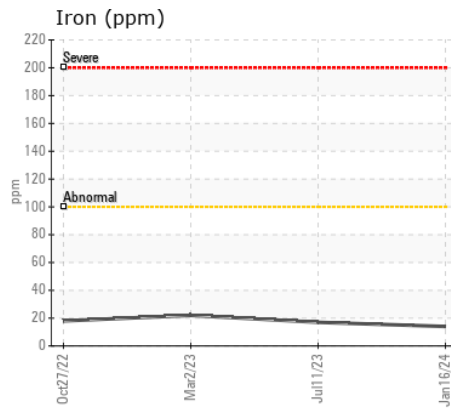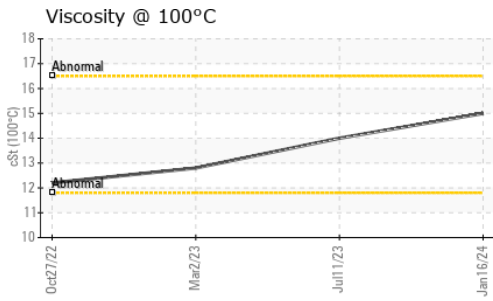

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **THOMAS CAVANAGH CONSTRUCTION LTD**
Sample No. : LH0252142 **Received** : 23 Jan 2024 **RR # 2, 9094 CAVANAGH ROAD**
Lab Number : 02610510 **Diagnosed** : 23 Jan 2024 **ASHTON, ON**
Unique Number : 5711596 **Diagnostician** : Kevin Marson **CA K0A 1B0**
Test Package : MOB 1 **Contact:** Keith

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (613)257-4995
 F: (613)253-0071