



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**(360382)**  
Machine Id  
**LIEBHERR LH60C 119564-1528**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA 10W40 (44 LTR)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0278912</b>	LH0270566	LH0234856
Sample Date		Client Info		<b>18 Jan 2024</b>	11 Oct 2023	23 Jun 2023
Machine Age	hrs	Client Info		<b>4002</b>	3521	2997
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>3</b>	4	3
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	<b>2</b>	1	<1
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>125	<b>1</b>	2	2
Tin	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	<b>6</b>	5	6
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.1</b>	9.1	8.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.0</b>	19.3	18.6
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>20	<b>1</b>	2	2
Boron	ppm	ASTM D5185(m)		<b>1</b>	1	1
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>58</b>	59	59
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)		<b>966</b>	989	990
Calcium	ppm	ASTM D5185(m)		<b>1074</b>	1111	1074
Phosphorus	ppm	ASTM D5185(m)		<b>1026</b>	1008	1063
Zinc	ppm	ASTM D5185(m)		<b>1196</b>	1251	1218
Sulfur	ppm	ASTM D5185(m)		<b>2751</b>	2553	2549
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>17.3</b>	17.0	16.4
Visc @ 100°C	cSt	ASTM D7279(m)		<b>13.1</b>	12.9	12.9

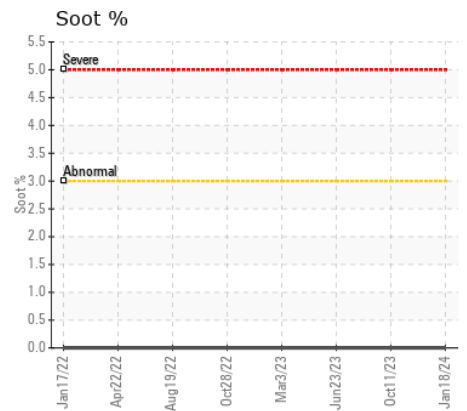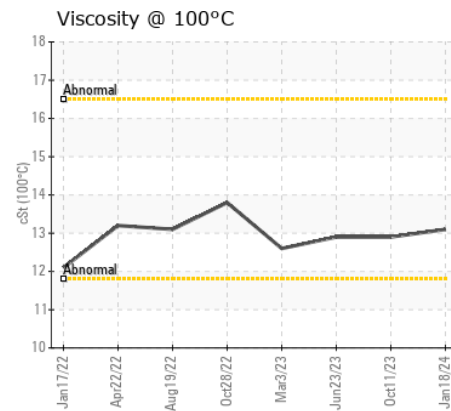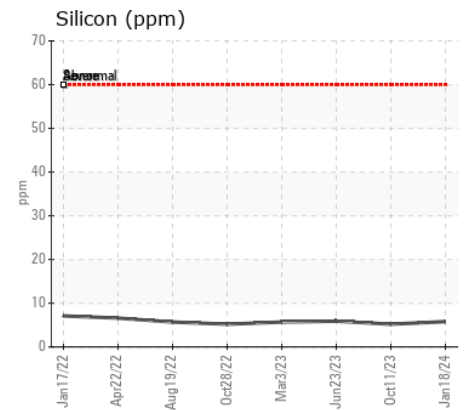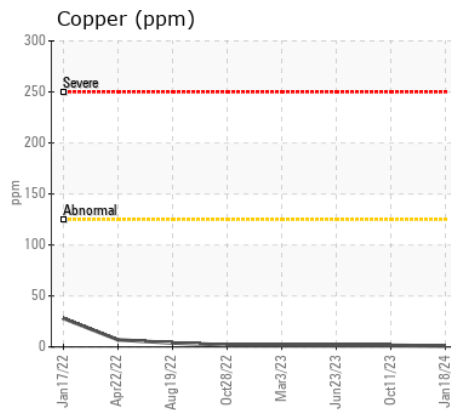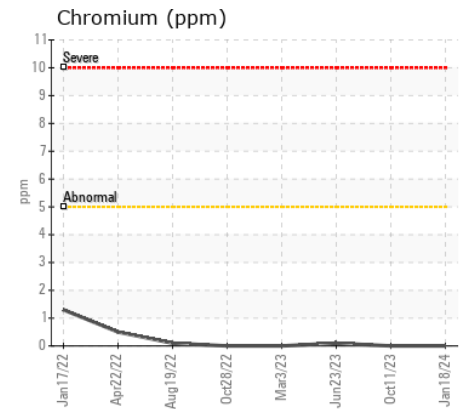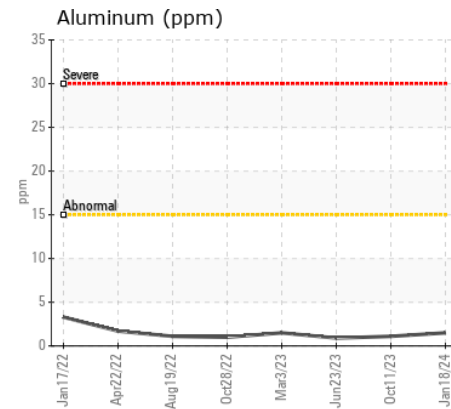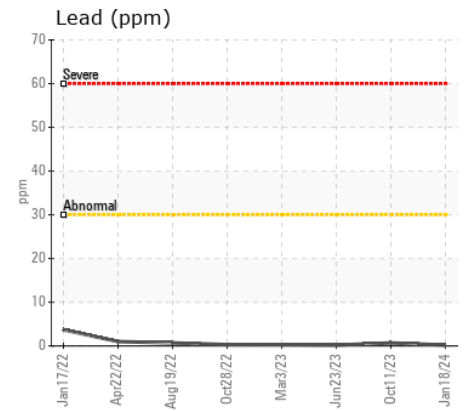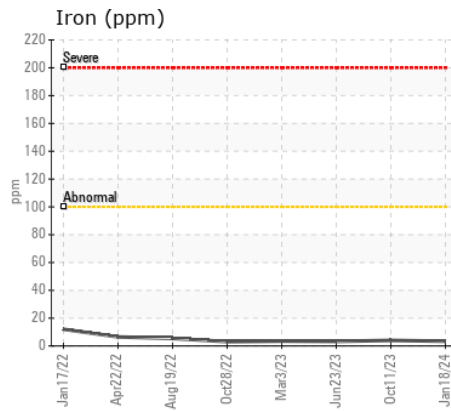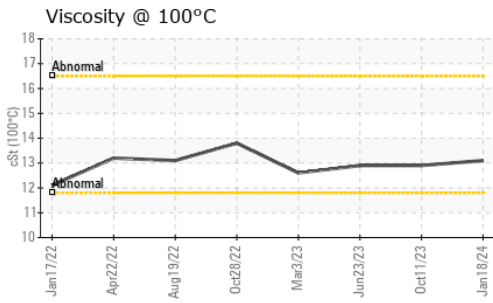

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0278912 **Received** : 23 Jan 2024  
**Lab Number** : 02610523 **Diagnosed** : 23 Jan 2024  
**Unique Number** : 5711609 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**GERDAU AMERISTEEL**  
 3000 COPELAND DR  
 CORNWALL, ON  
 CA K6H 6P7  
 Contact: Ross Cotton  
 cotton@gerdauameristeel.com  
 T: (613)933-1119  
 F: (613)933-6142