



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**116431-1217**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA 10W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0277753</b>	LH0270562	LH0222875
Sample Date		Client Info		<b>08 Jan 2024</b>	25 Sep 2023	09 May 2023
Machine Age	hrs	Client Info		<b>8104</b>	7608	7133
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>4</b>	5	5
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	<b>1</b>	2	1
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	1	<1
Copper	ppm	ASTM D5185(m)	>125	<b>&lt;1</b>	3	3
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	<b>6</b>	7	6
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.8</b>	8.9	10.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.0</b>	19.1	19.5
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>20	<b>1</b>	2	2
Boron	ppm	ASTM D5185(m)		<b>6</b>	1	1
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>57</b>	59	59
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)		<b>925</b>	976	950
Calcium	ppm	ASTM D5185(m)		<b>1132</b>	1127	1133
Phosphorus	ppm	ASTM D5185(m)		<b>1000</b>	1021	1111
Zinc	ppm	ASTM D5185(m)		<b>1162</b>	1244	1241
Sulfur	ppm	ASTM D5185(m)		<b>2715</b>	2622	2722
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>16.7</b>	16.3	17.2
Visc @ 100°C	cSt	ASTM D7279(m)		<b>13.0</b>	12.8	12.5

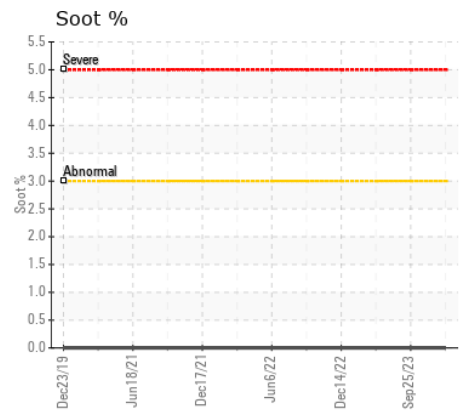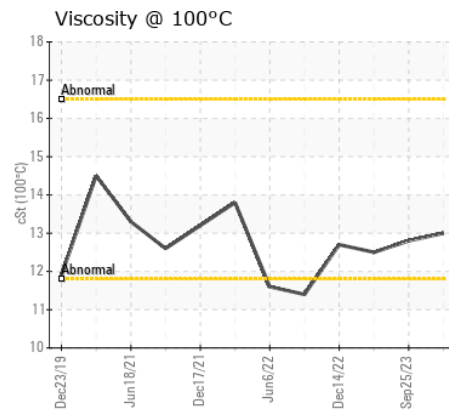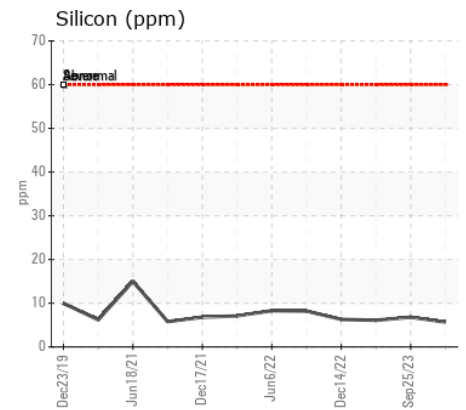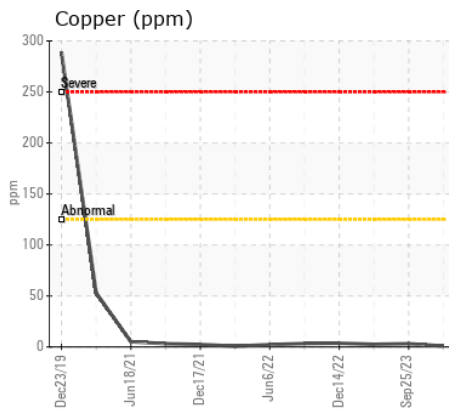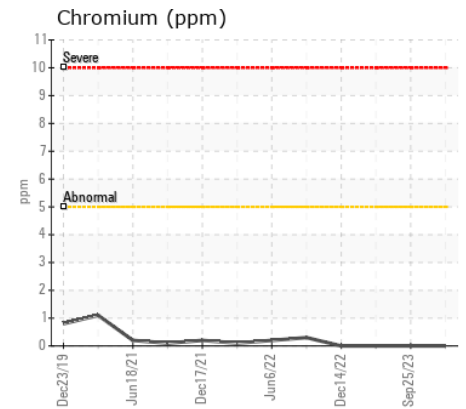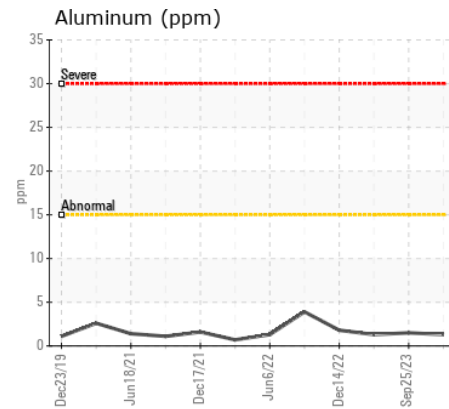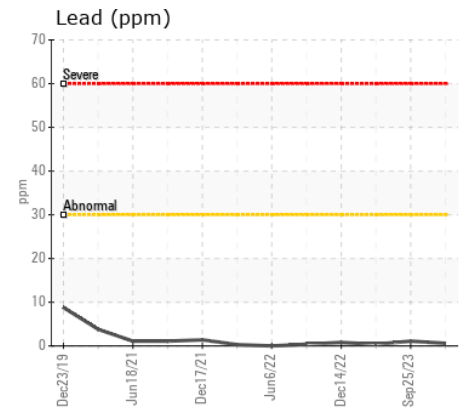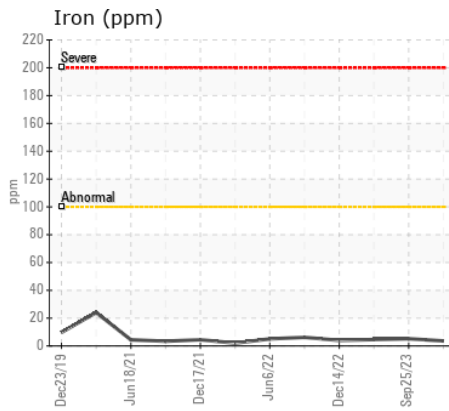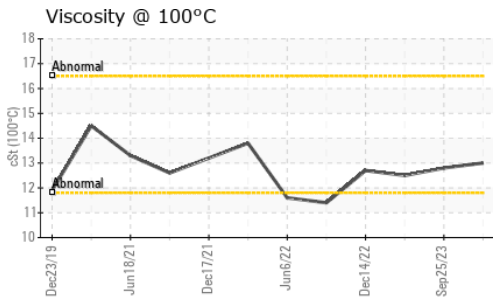

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0277753 **Received** : 23 Jan 2024  
**Lab Number** : 02610528 **Diagnosed** : 23 Jan 2024  
**Unique Number** : 5711614 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1

**American Iron and Metal**  
 2555 Sheffield Road  
 Ottawa, ON  
 CA K1B 3V6  
 Contact: Dan Dupelle  
 ddupelle@aim-rg.com  
 T: (613)228-9380  
 F: (613)745-0692

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.