



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
EPIROC MT65 TRK 219

Component
Diesel Engine

Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0886058	WC0865490	WC0750482
Sample Date		Client Info		18 Jan 2024	05 Dec 2023	07 Sep 2023
Machine Age	hrs	Client Info		7736	7425	6884
Oil Age	hrs	Client Info		0	250	250
Filter Age	hrs	Client Info		0	250	250
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	5	4	5
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>4	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	<1	1
Lead	ppm	ASTM D5185(m)	>40	<1	1	1
Copper	ppm	ASTM D5185(m)	>330	<1	<1	1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	5	6
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0.1	0.2
Nitration	Abs/cm	ASTM D7624*	>20	6.5	6.3	6.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.6	22.8	22.9
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>118	3	3	3
Boron	ppm	ASTM D5185(m)		50	54	56
Barium	ppm	ASTM D5185(m)		0	<1	<1
Molybdenum	ppm	ASTM D5185(m)		40	39	40
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		514	496	492
Calcium	ppm	ASTM D5185(m)		1708	1655	1759
Phosphorus	ppm	ASTM D5185(m)		744	718	756
Zinc	ppm	ASTM D5185(m)		858	837	902
Sulfur	ppm	ASTM D5185(m)		2193	2012	2116
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.5	21.2	21.1
Visc @ 100°C	cSt	ASTM D7279(m)		13.0	13.0	12.9

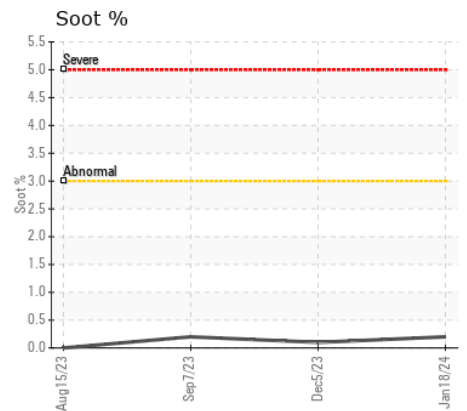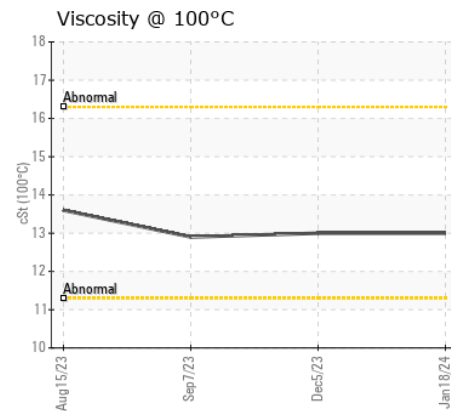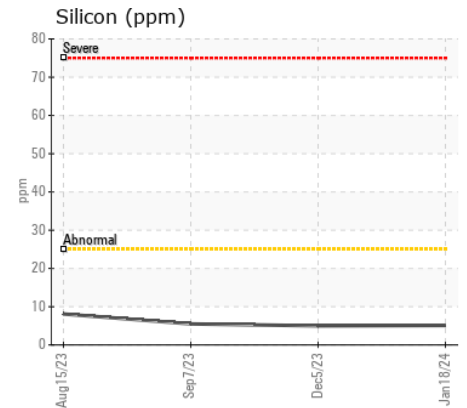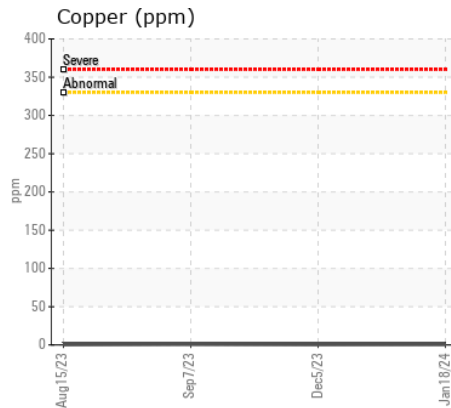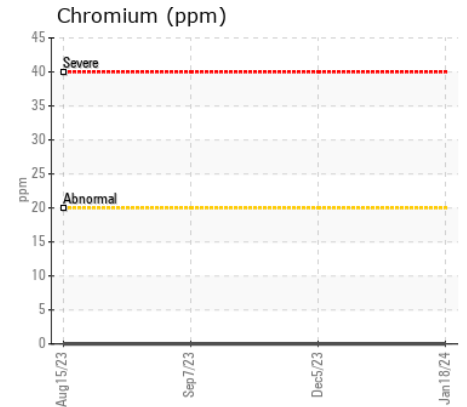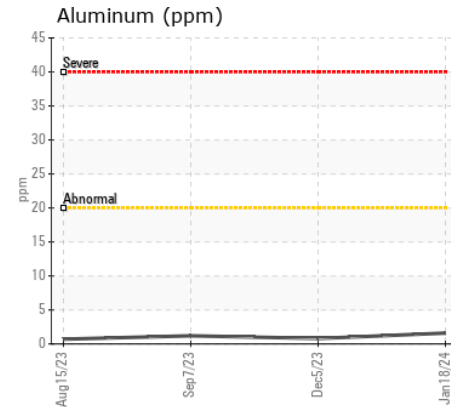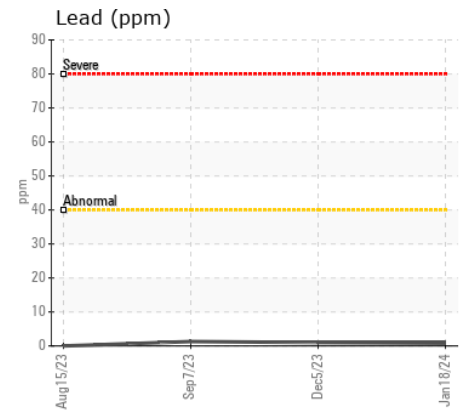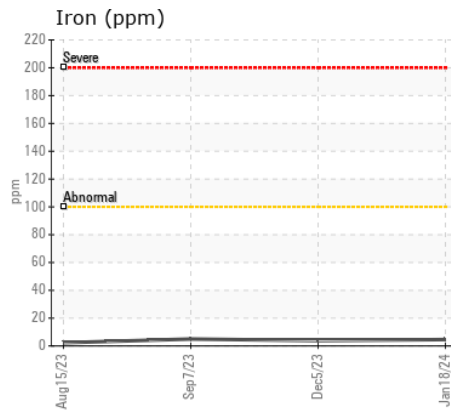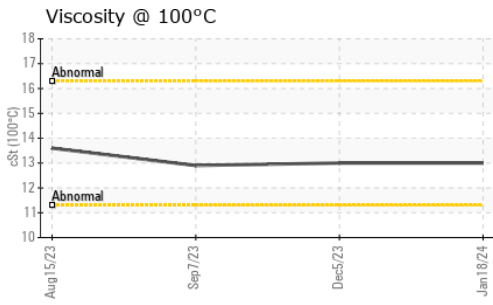

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0886058 **Received** : 23 Jan 2024
Lab Number : 02610541 **Diagnosed** : 23 Jan 2024
Unique Number : 5711627 **Diagnostician** : Wes Davis
Test Package : MOB 1

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Mike Campbell
 mike.campbell@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.