



OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
NO UNIT WC0842836
 Component
Transmission (Auto)
 Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.
 Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|------------------|--------|---------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | WC0842836 | --- | --- |
| Sample Date | | Client Info | | 22 Jan 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 0 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | N/A | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |
| Iron | ppm | ASTM D5185(m) | >160 | 57 | --- | --- |
| Chromium | ppm | ASTM D5185(m) | >5 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185(m) | >5 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | >5 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) | >50 | 24 | --- | --- |
| Lead | ppm | ASTM D5185(m) | >50 | 3 | --- | --- |
| Copper | ppm | ASTM D5185(m) | >225 | 5 | --- | --- |
| Tin | ppm | ASTM D5185(m) | >10 | 2 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| White Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Yellow Metal | scalar | Visual* | NONE | VLITE | --- | --- |
| Silicon | ppm | ASTM D5185(m) | >20 | 4 | --- | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | --- | --- |
| Water | | WC Method | >0.1 | NEG | --- | --- |
| Silt | scalar | Visual* | NONE | NONE | --- | --- |
| Debris | scalar | Visual* | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- | --- |
| Odor | scalar | Visual* | NORML | NORML | --- | --- |
| Emulsified Water | scalar | Visual* | >0.1 | NEG | --- | --- |
| Sodium | ppm | ASTM D5185(m) | | 6 | --- | --- |
| Boron | ppm | ASTM D5185(m) | | 116 | --- | --- |
| Barium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | | <1 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | | 32 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | | 278 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | | 4 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | | 578 | --- | --- |
| Visc @ 40°C | cSt | ASTM D7279(m) | 26.0 | 37.0 | --- | --- |

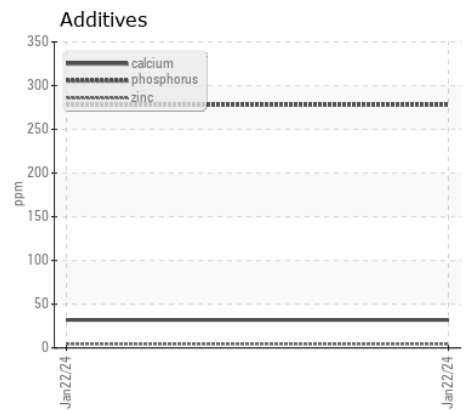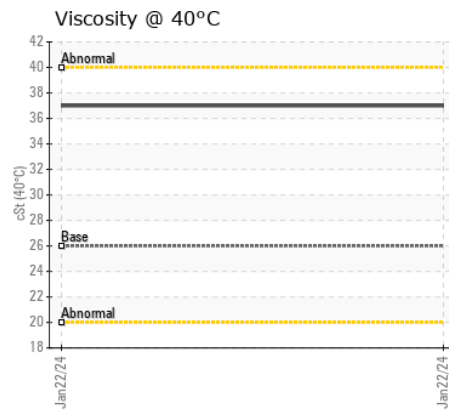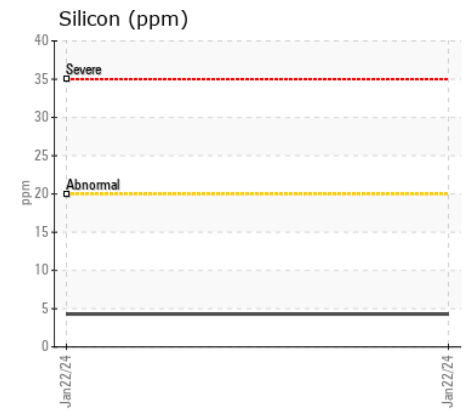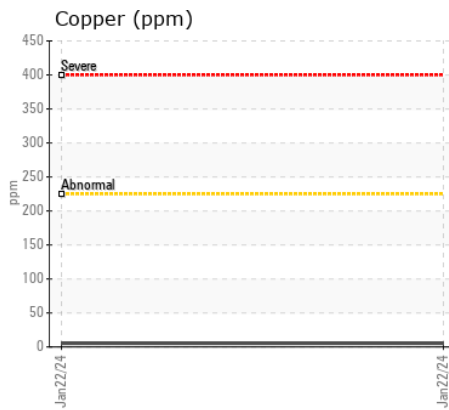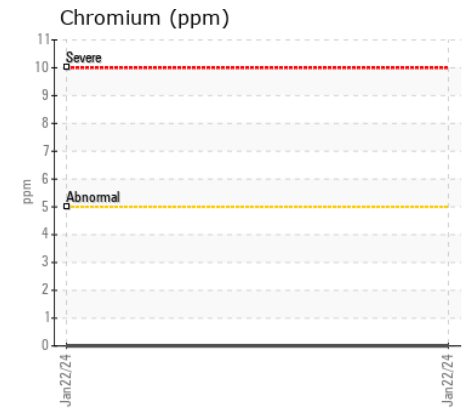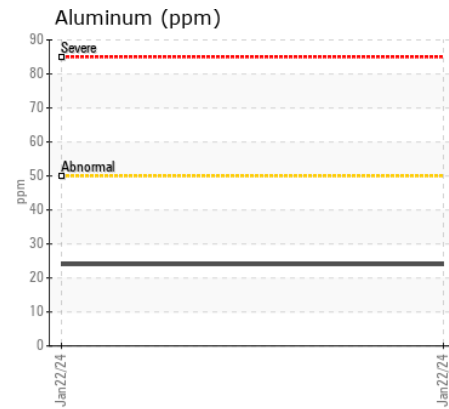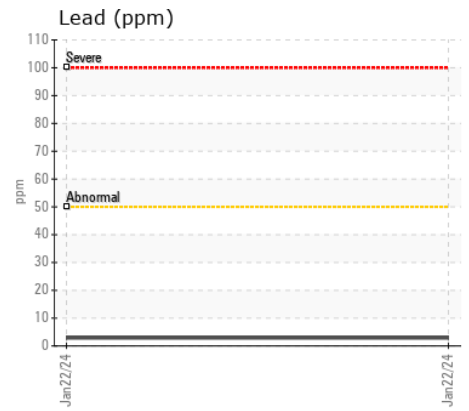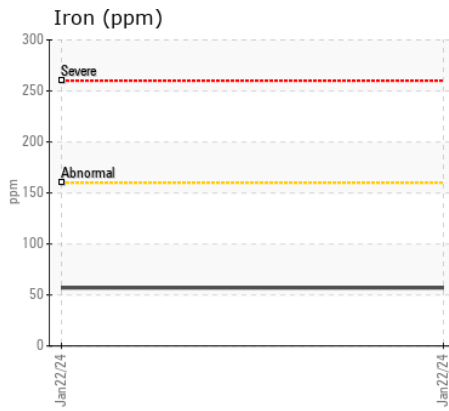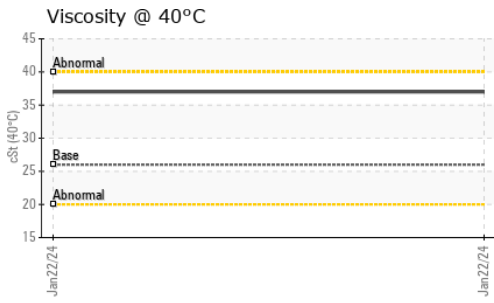

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0842836 **Received** : 23 Jan 2024
Lab Number : 02610663 **Diagnosed** : 24 Jan 2024
Unique Number : 5711749 **Diagnostician** : Wes Davis
Test Package : MOB 1

OX FLEET CARE
 466 HIGHWAY 52
 DUNDAS, ON
 CA L9H 5E2

Contact: Robert Hughes
 robert.hughes@ox-equipment.com
 T: (289)683-6037
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.