



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**116431-1217**  
Component  
**Rear Differential**  
Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

### RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.  
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0277750</b>	LH0128848	LH0239236
Sample Date		Client Info		<b>08 Jan 2024</b>	09 May 2023	29 Aug 2022
Machine Age	hrs	Client Info		<b>8104</b>	7133	6053
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>None</b>	None	None
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>150	<b>4</b>	9	8
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>125	<b>29</b>	14	14
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<b>2</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.  
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Boron	ppm	ASTM D5185(m)	0	<b>304</b>	264	314
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	4	5
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	<1	<b>2</b>	5	1
Calcium	ppm	ASTM D5185(m)	<1	<b>8</b>	12	8
Phosphorus	ppm	ASTM D5185(m)	2143	<b>1283</b>	1644	1402
Zinc	ppm	ASTM D5185(m)	<1	<b>20</b>	17	12
Sulfur	ppm	ASTM D5185(m)	23468	<b>20864</b>	22456	21699
Visc @ 40°C	cSt	ASTM D7279(m)	170	<b>103</b>	110	103

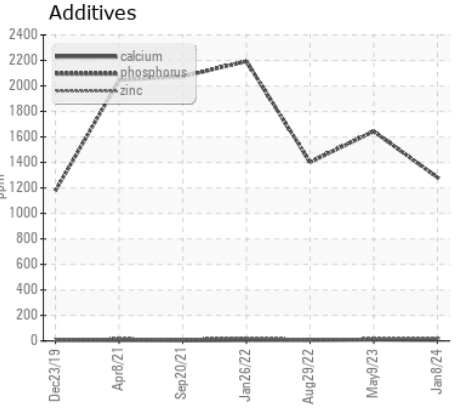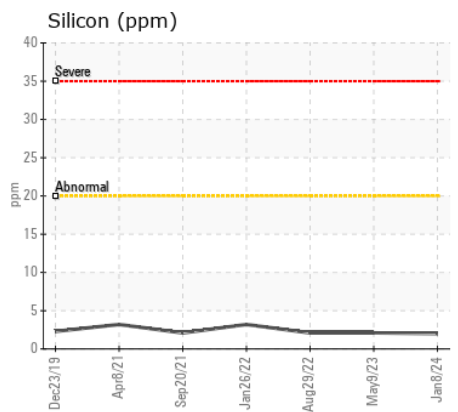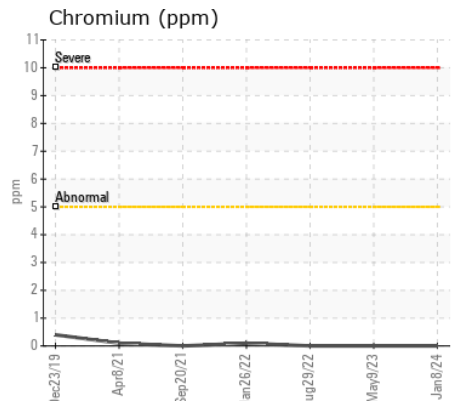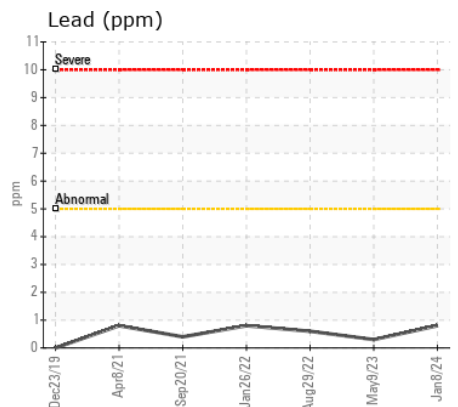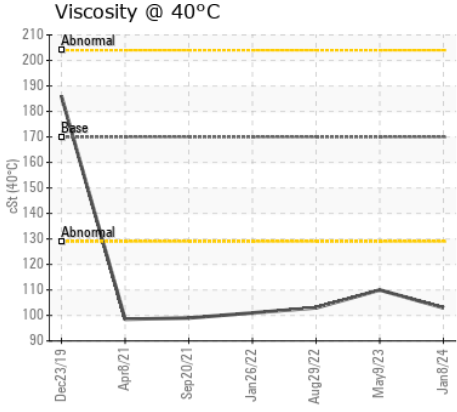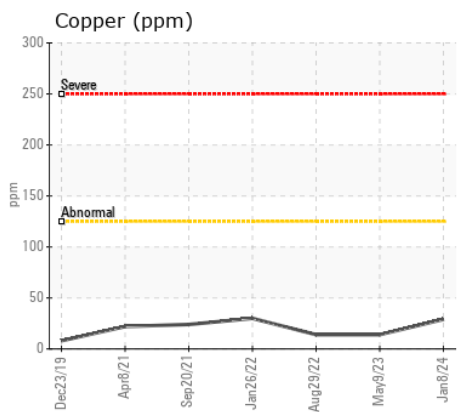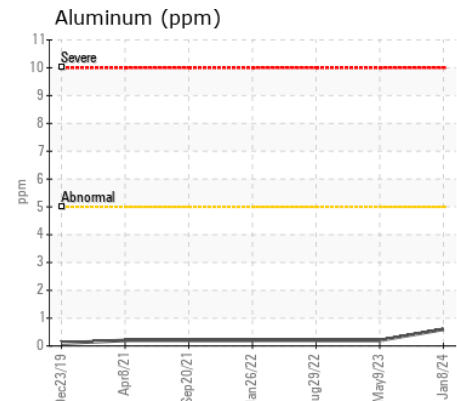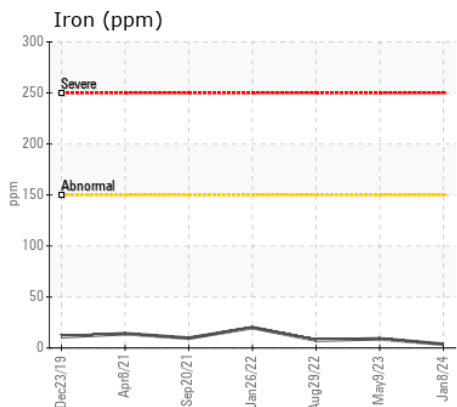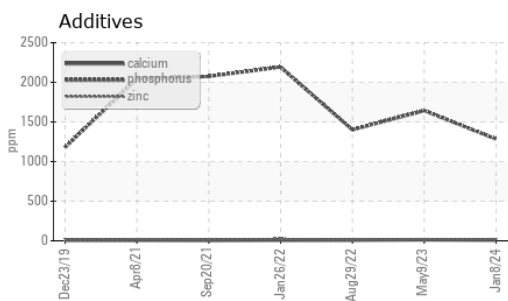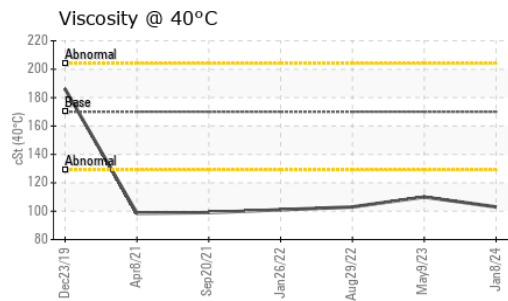

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0277750 **Received** : 23 Jan 2024  
**Lab Number** : 02610666 **Diagnosed** : 23 Jan 2024  
**Unique Number** : 5711752 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**American Iron and Metal**  
 2555 Sheffield Road  
 Ottawa, ON  
 CA K1B 3V6  
 Contact: Dan Dupelle  
 ddupelle@aim-rg.com  
 T: (613)228-9380  
 F: (613)745-0692

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.