



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[592767]**  
Machine Id  
**LIEBHERR HS895 188244**  
Component  
**Splitter Box**  
Fluid  
**PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)**

### RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.  
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0278946</b>	LH0281368	LH0276122
Sample Date		Client Info		<b>04 Jan 2024</b>	21 Dec 2023	05 Sep 2023
Machine Age	hrs	Client Info		<b>20588</b>	20420	19868
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>21</b>	18	17
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>20	<b>2</b>	6	4
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<b>1</b>	<1	2
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	<1	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.  
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	1
Boron	ppm	ASTM D5185(m)	328	<b>33</b>	25	226
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>2</b>	4	2
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	1	<b>30</b>	53	25
Calcium	ppm	ASTM D5185(m)	7	<b>92</b>	67	83
Phosphorus	ppm	ASTM D5185(m)	1145	<b>688</b>	726	1125
Zinc	ppm	ASTM D5185(m)	3	<b>161</b>	109	134
Sulfur	ppm	ASTM D5185(m)	17909	<b>15753</b>	19150	16495
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	<b>71.6</b>	85.8	83.4

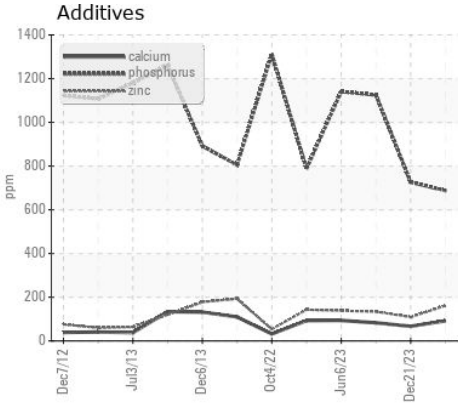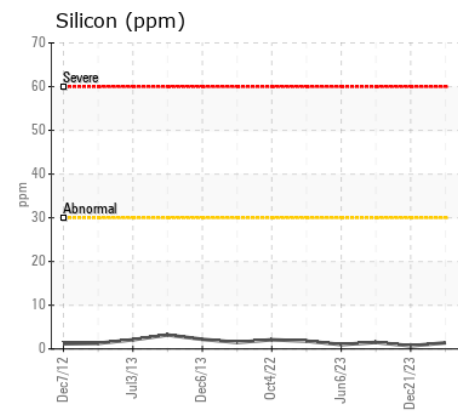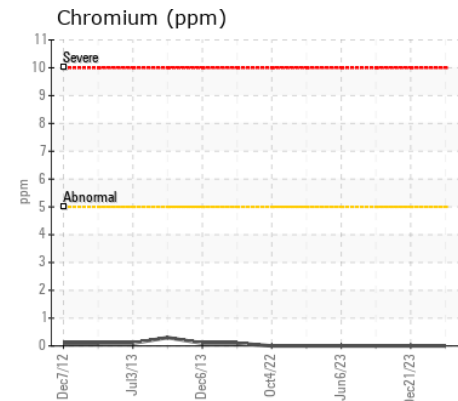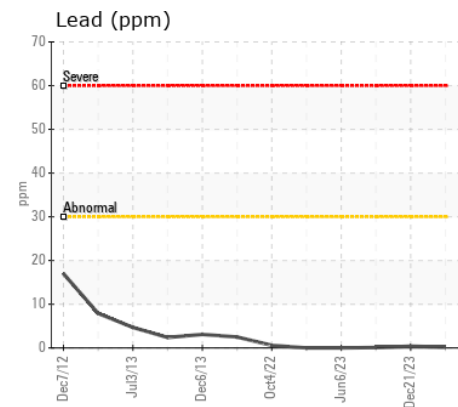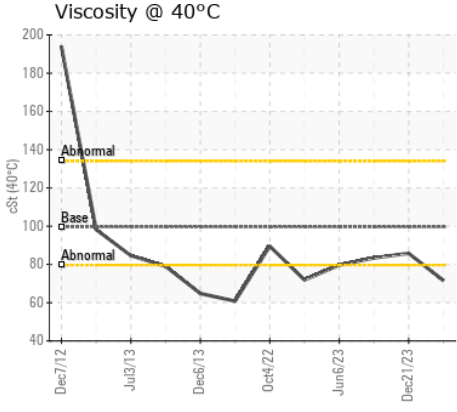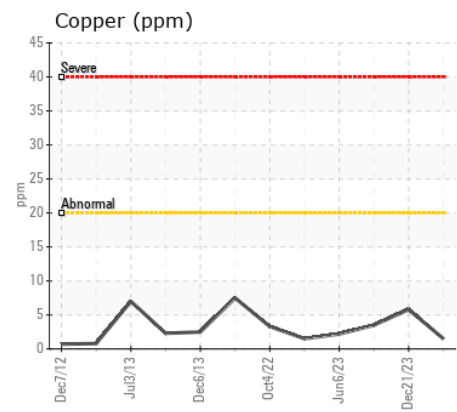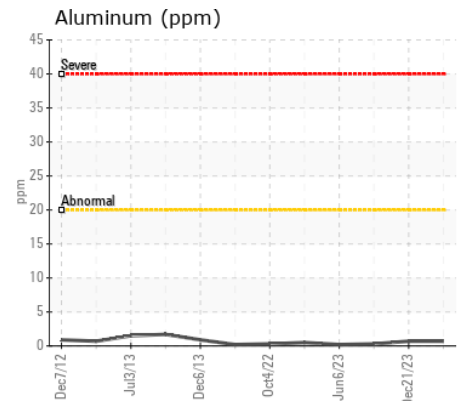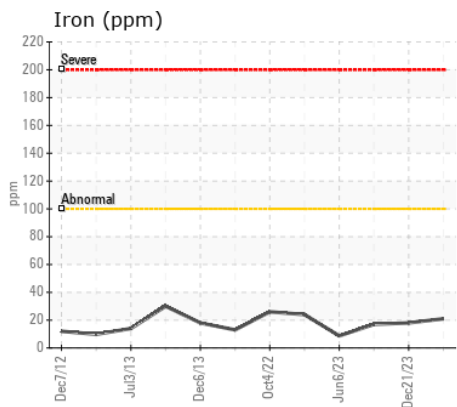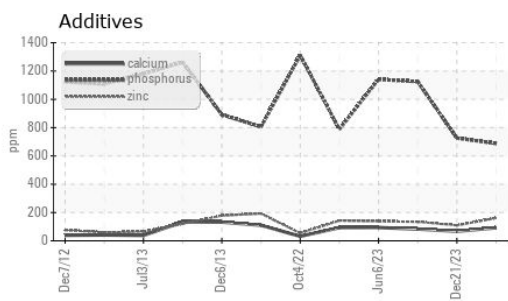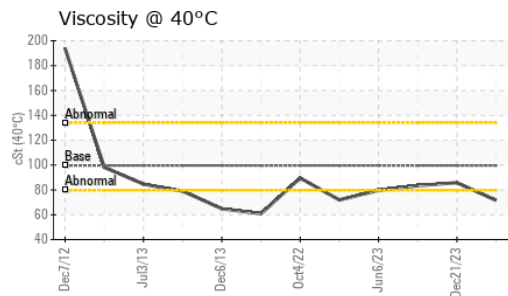

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0278946 **Received** : 23 Jan 2024  
**Lab Number** : 02610688 **Diagnosed** : 23 Jan 2024  
**Unique Number** : 5711774 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**HIGGS & HIGGS**  
 RR # 4  
 ST THOMAS, ON  
 CA N5P 3S8  
 Contact: Bernie Higgs

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T: (519)631-4095  
 F: (519)631-2745