



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area

Guardian

Machine Id

6733 Jet

Component

Port Hydraulic System

Fluid

TUXTON PREMIUM HYDRAULIC AW 32 (7 LTR)

RECOMMENDATION

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0895392	WC0764542	WC0627558
Sample Date		Client Info		12 Feb 2024	17 Jan 2023	07 Apr 2022
Machine Age	hrs	Client Info		621	548	521
Oil Age	hrs	Client Info		122	200	22
Filter Age	hrs	Client Info		122	200	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Not Changed	Not Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>20	<1	<1	<1
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>10	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>10	<1	0	<1
Copper	ppm	ASTM D5185(m)	>75	7	6	6
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION









There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<1	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	▲ 27203	1148	▲ 14813
Particles >6µm		ASTM D7647	>1300	▲ 1873	132	▲ 2190
Particles >14µm		ASTM D7647	>160	9	7	75
Particles >21µm		ASTM D7647	>40	3	3	14
Particles >38µm		ASTM D7647	>10	1	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 22/18/10	17/14/10	▲ 21/18/13
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Sodium	ppm	ASTM D5185(m)		0	0	0
Boron	ppm	ASTM D5185(m)		<1	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		<1	<1	0
Calcium	ppm	ASTM D5185(m)		15	10	10
Phosphorus	ppm	ASTM D5185(m)		328	351	323
Zinc	ppm	ASTM D5185(m)		377	376	373
Sulfur	ppm	ASTM D5185(m)		1639	1666	1686
Acid Number (AN)	mg KOH/g	ASTM D974*		0.47	0.49	0.52
Visc @ 40°C	cSt	ASTM D7279(m)	31.4	33.2	33.3	34.1

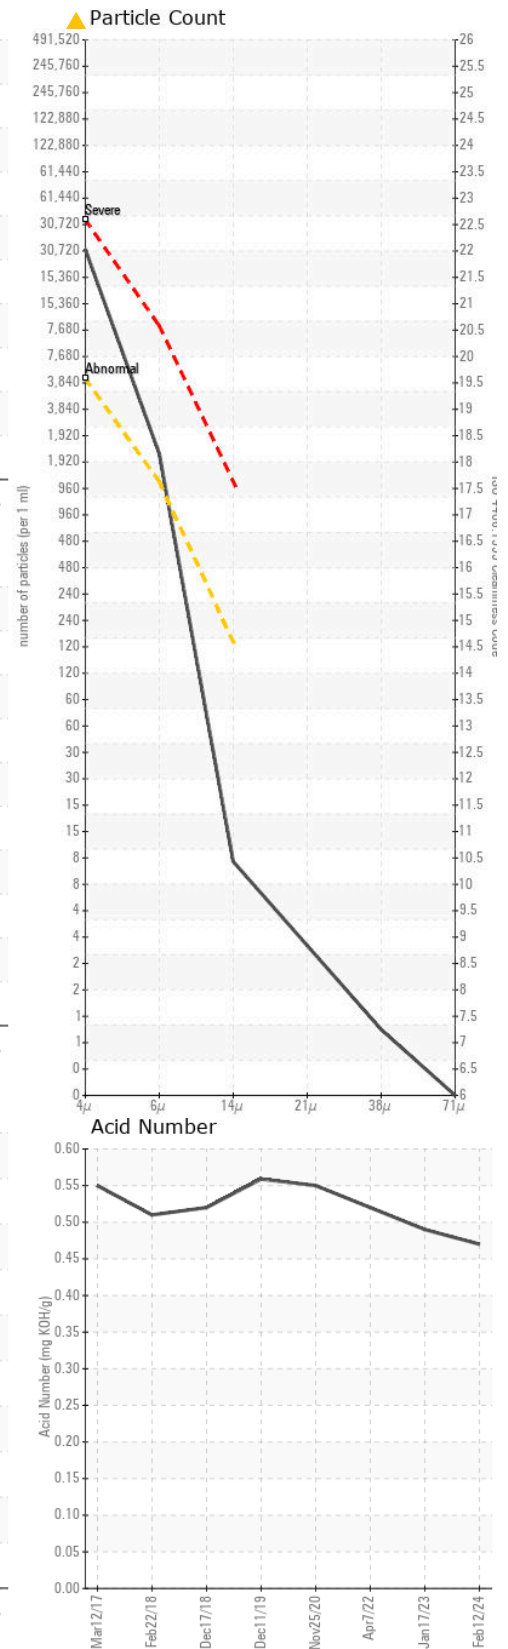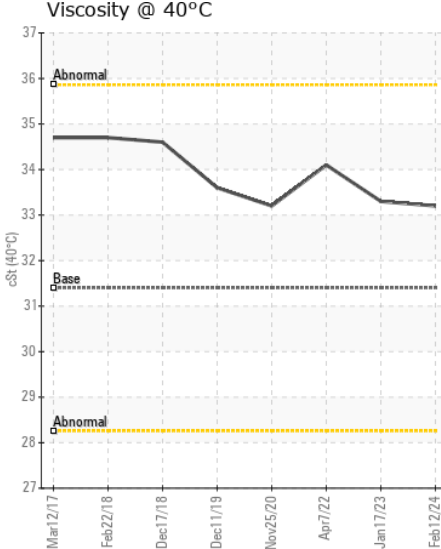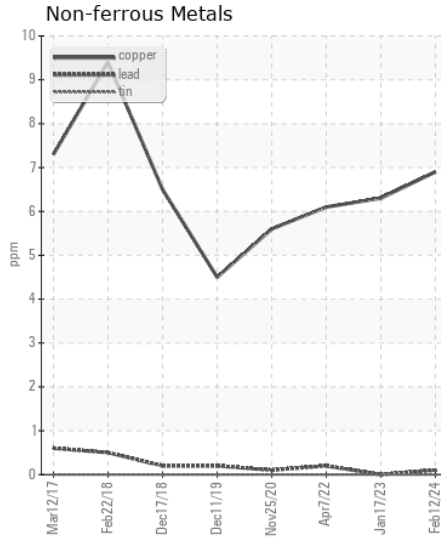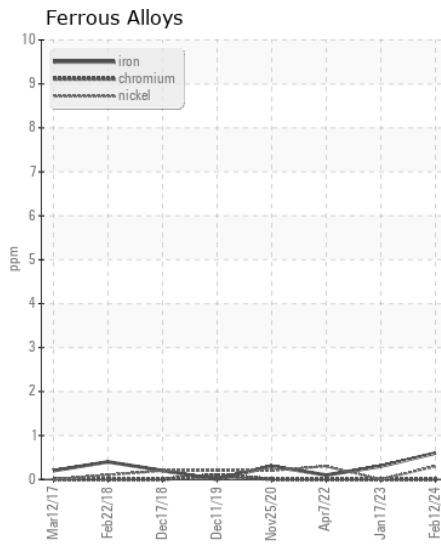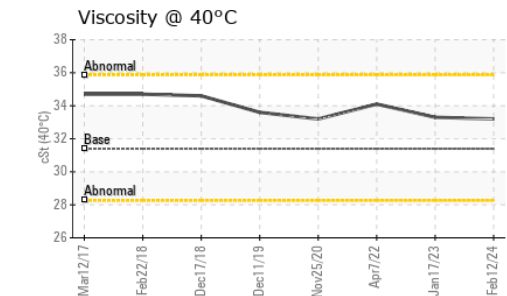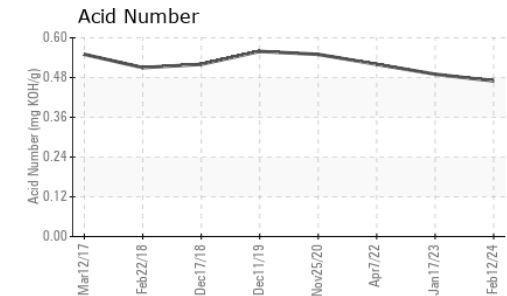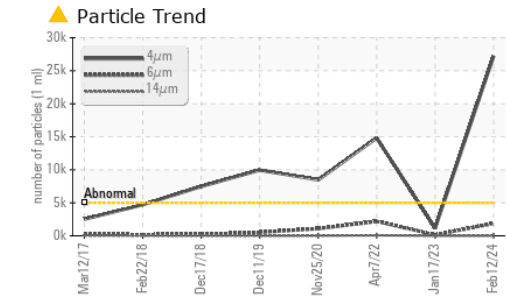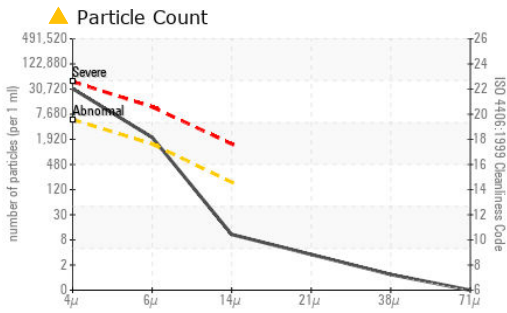

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0895392
Lab Number : 02615965
Unique Number : 5733075
Test Package : MAR 2 (Additional Tests: TAN Man)
Received : 15 Feb 2024
Tested : 16 Feb 2024
Diagnosed : 16 Feb 2024 - Wes Davis

Niagara City Cruises (Hornblower)
 5775 River Road
 Niagara Falls, ON
 CA L2G 3K9
 Contact: Evan Dubblestyn
 evan.dubblestyn@cityexperiences.com
 T: (519)373-4663
 F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.