



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
CITY OF GUELPH [392588]
 Machine Id
VOLVO PENTA L110H 632544
 Component
Transmission (Auto)
 Fluid
VOLVO EXTRA AUTOMATIC FLUID (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449491	---	---
Sample Date		Client Info		02 Feb 2024	---	---
Machine Age	hrs	Client Info		1088	---	---
Oil Age	hrs	Client Info		1088	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	42	---	---
Chromium	ppm	ASTM D5185(m)	>7	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>15	2	---	---
Lead	ppm	ASTM D5185(m)	>350	0	---	---
Copper	ppm	ASTM D5185(m)	>300	6	---	---
Tin	ppm	ASTM D5185(m)	>5	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>25	9	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)		77	---	---
Barium	ppm	ASTM D5185(m)		4	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		4	---	---
Magnesium	ppm	ASTM D5185(m)		3	---	---
Calcium	ppm	ASTM D5185(m)		85	---	---
Phosphorus	ppm	ASTM D5185(m)		199	---	---
Zinc	ppm	ASTM D5185(m)		16	---	---
Sulfur	ppm	ASTM D5185(m)		1725	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		28.4	---	---

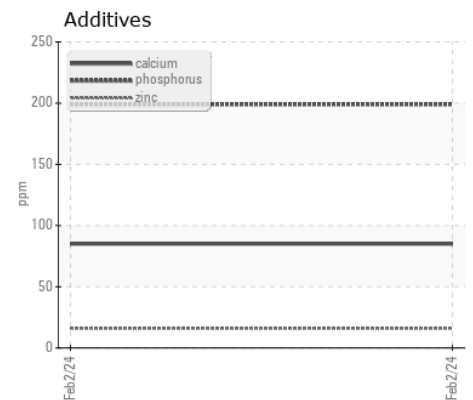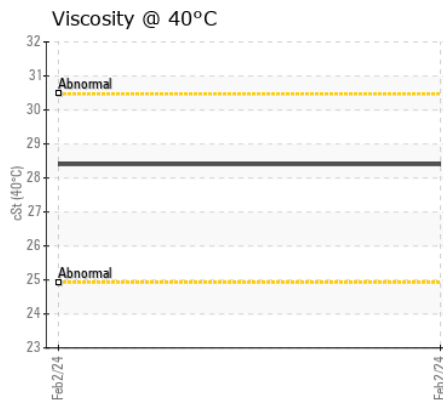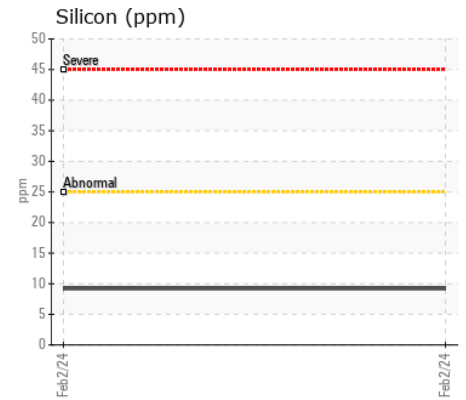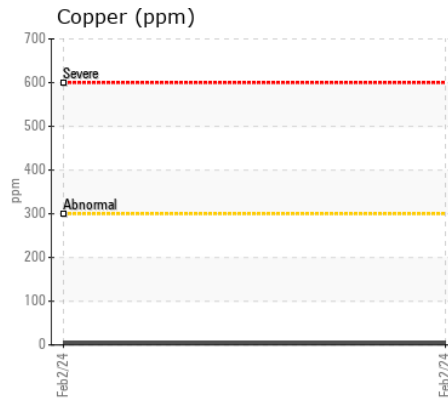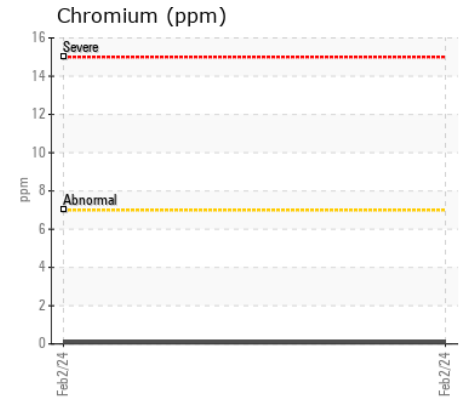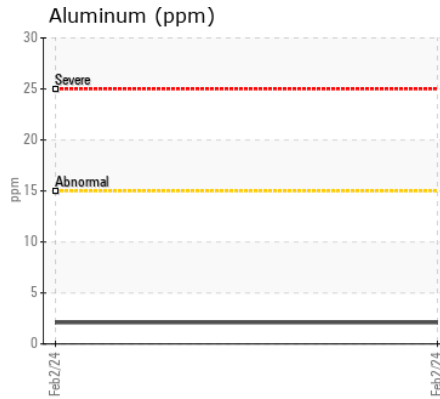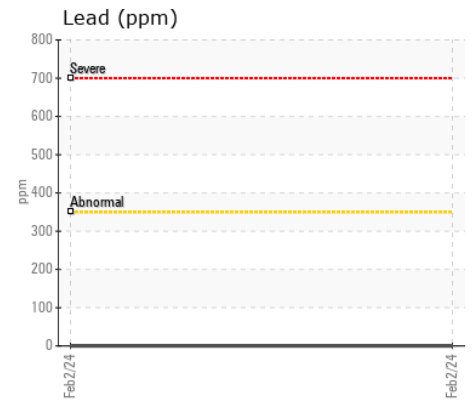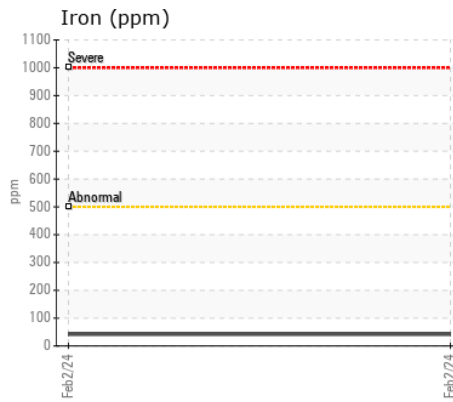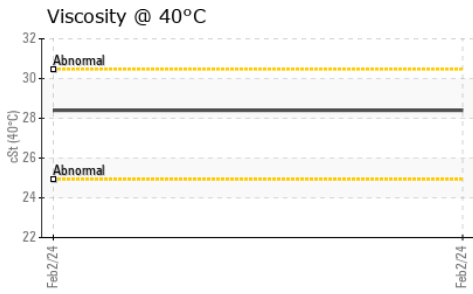

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP449491 **Received** : 15 Feb 2024
Lab Number : 02616005 **Tested** : 15 Feb 2024
Unique Number : 5733115 **Diagnosed** : 15 Feb 2024 - Wes Davis
Test Package : MOB 1

Strongco Equipment
 5179 Fountain St N.
 Breslau, ON
 CA N0B 1M0
 Contact: Eric Mailloux
 emailoux@strongco.com
 T: (519)744-3518
 F: (519)744-3284

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.