



Machine Id  
**920001**  
 Component  
**Transmission (Auto)**  
 Fluid  
**DEXRON III (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0098015</b>	---	---
Sample Date		Client Info		<b>05 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>22136</b>	---	---
Oil Age	hrs	Client Info		<b>22136</b>	---	---
Filter Age	hrs	Client Info		<b>22136</b>	---	---
Oil Changed		Client Info		<b>Not Changd</b>	---	---
Filter Changed		Client Info		<b>Not Changd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>230	<b>60</b>	---	---
Chromium	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>65	<b>25</b>	---	---
Lead	ppm	ASTM D5185(m)	>55	<b>10</b>	---	---
Copper	ppm	ASTM D5185(m)	>85	<b>43</b>	---	---
Tin	ppm	ASTM D5185(m)	>5	<b>5</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	<b>4</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>10</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>87</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>1</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>47</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>335</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>5</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>1550</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	<b>35.5</b>	---	---

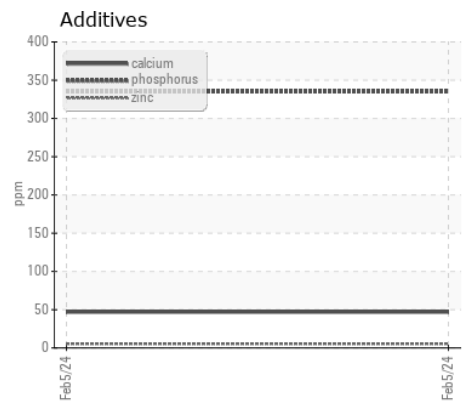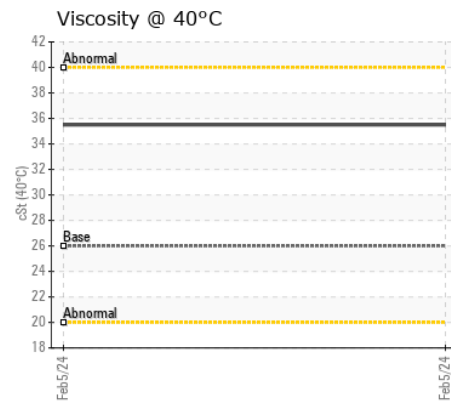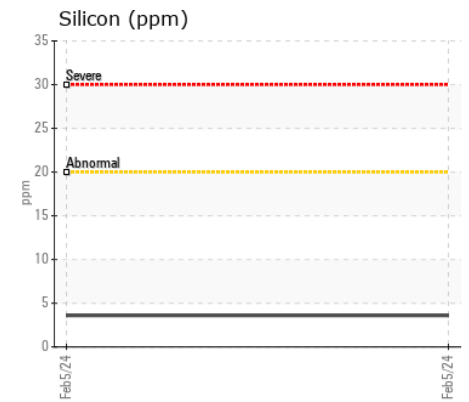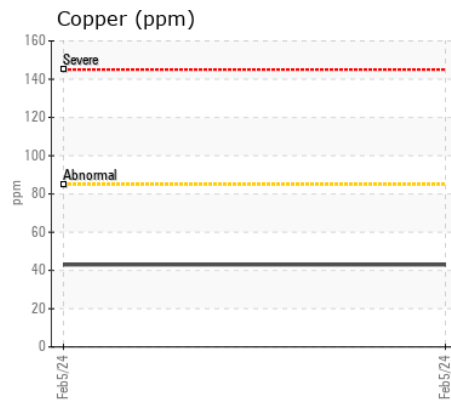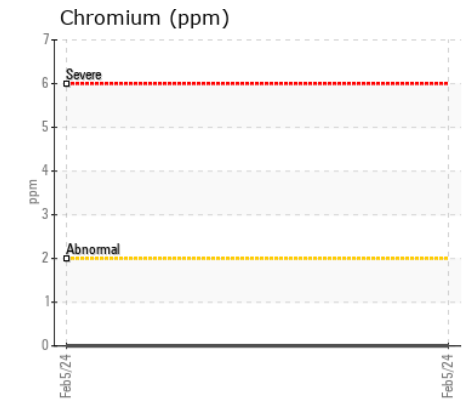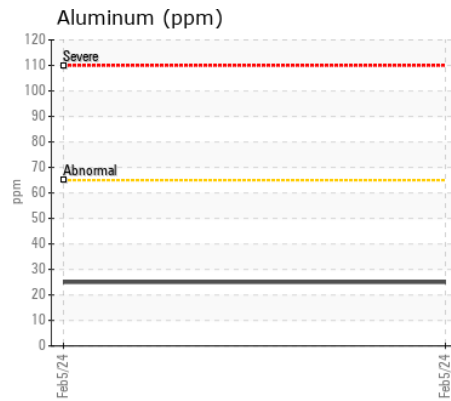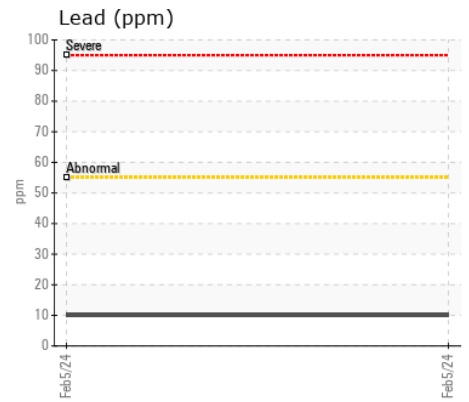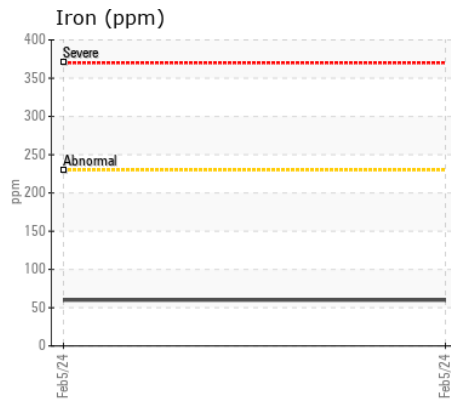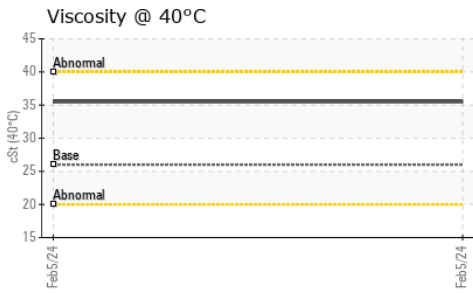

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0098015 **Received** : 15 Feb 2024  
**Lab Number** : 02616019 **Tested** : 15 Feb 2024  
**Unique Number** : 5733129 **Diagnosed** : 15 Feb 2024 - Wes Davis  
**Test Package** : MOB 1

**GFL Environmental - 593**  
 4421 Boban Drive  
 Nanaimo, BC  
 CA V9T 6A6  
 Contact: Patrick Rutti  
 prutti@gflenv.com  
 T: (250)739-3345  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.