



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**CITY OF GUELPH [392588]**  
 Machine Id  
**VOLVO PENTA L110H 632544**  
 Component  
**Front Axle**  
 Fluid  
**VOLVO WB 102 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449487	---	---
Sample Date		Client Info		02 Feb 2024	---	---
Machine Age	hrs	Client Info		1088	---	---
Oil Age	hrs	Client Info		1088	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	146	---	---
Chromium	ppm	ASTM D5185(m)	>10	3	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)		1	---	---
Lead	ppm	ASTM D5185(m)		0	---	---
Copper	ppm	ASTM D5185(m)		2	---	---
Tin	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)		17	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)		113	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		6	---	---
Manganese	ppm	ASTM D5185(m)		6	---	---
Magnesium	ppm	ASTM D5185(m)		9	---	---
Calcium	ppm	ASTM D5185(m)		4080	---	---
Phosphorus	ppm	ASTM D5185(m)		1348	---	---
Zinc	ppm	ASTM D5185(m)		1590	---	---
Sulfur	ppm	ASTM D5185(m)		3589	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		41.5	---	---

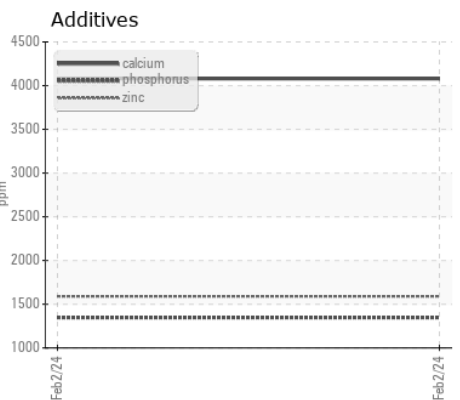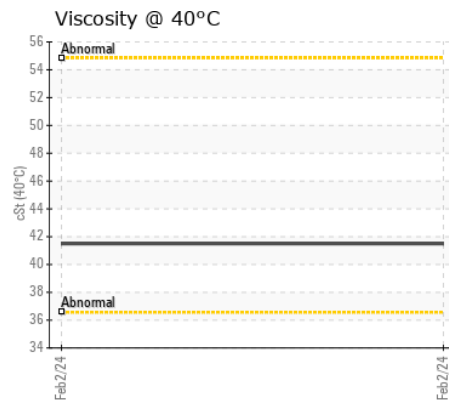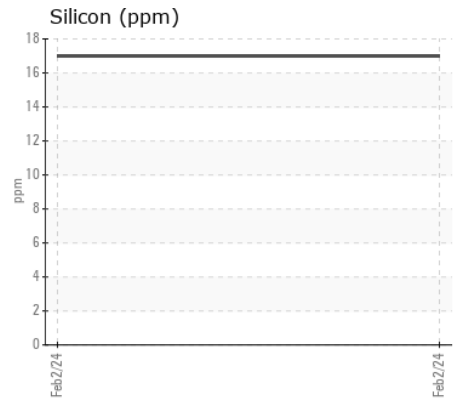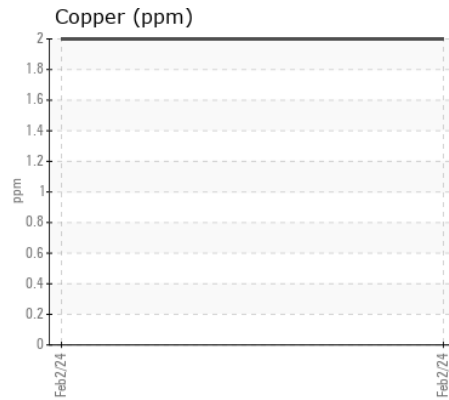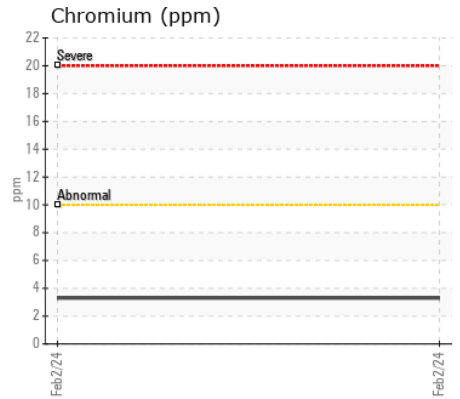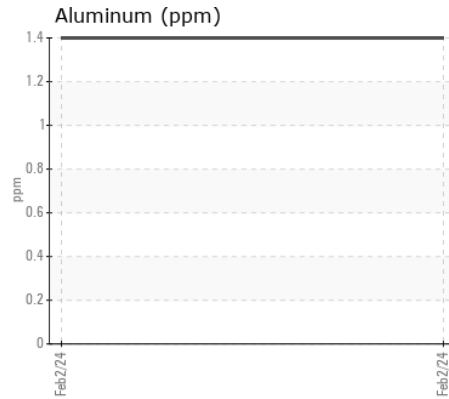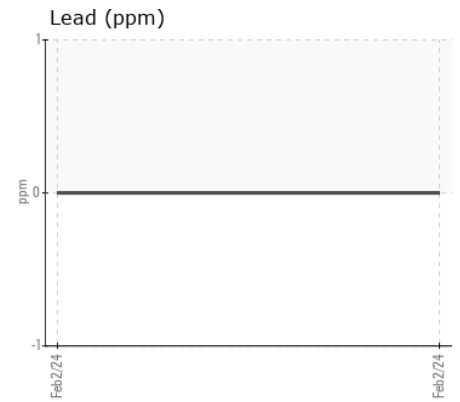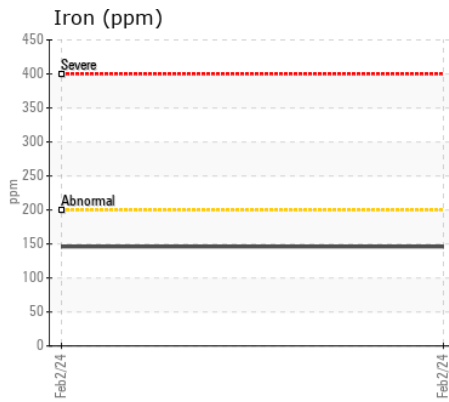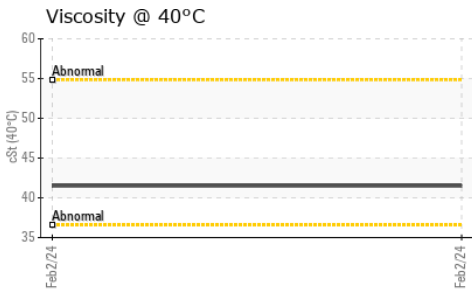

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP449487  
**Lab Number** : 02616084  
**Unique Number** : 5733194  
**Test Package** : MOB 1  
**Received** : 15 Feb 2024  
**Tested** : 15 Feb 2024  
**Diagnosed** : 15 Feb 2024 - Wes Davis

**Strongco Equipment**  
 5179 Fountain St N.  
 Breslau, ON  
 CA N0B 1M0  
 Contact: Eric Mailloux  
 emailoux@strongco.com  
 T: (519)744-3518  
 F: (519)744-3284

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.