



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR R924C 028643-1069**

Component  
**Left Final Drive**

Fluid  
**PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0281212</b>	LH0246919	---
Sample Date		Client Info		<b>01 Feb 2024</b>	27 Jan 2023	---
Machine Age	hrs	Client Info		<b>18438</b>	15740	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	<b>102</b>	287	---
Chromium	ppm	ASTM D5185(m)	>10	<b>5</b>	13	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>5</b>	12	---
Lead	ppm	ASTM D5185(m)	>25	<b>3</b>	7	---
Copper	ppm	ASTM D5185(m)	>50	<b>27</b>	45	---
Tin	ppm	ASTM D5185(m)	>10	<b>2</b>	4	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	<b>33</b>	75	---
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	8	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	Visual*	NONE	<b>VLITE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>6</b>	16	---
Boron	ppm	ASTM D5185(m)	328	<b>204</b>	3	---
Barium	ppm	ASTM D5185(m)	1	<b>&lt;1</b>	<1	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)		<b>2</b>	7	---
Magnesium	ppm	ASTM D5185(m)	1	<b>3</b>	4	---
Calcium	ppm	ASTM D5185(m)	7	<b>28</b>	29	---
Phosphorus	ppm	ASTM D5185(m)	1145	<b>1485</b>	2158	---
Zinc	ppm	ASTM D5185(m)	3	<b>43</b>	73	---
Sulfur	ppm	ASTM D5185(m)	17909	<b>23918</b>	34301	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	<b>114</b>	164	---

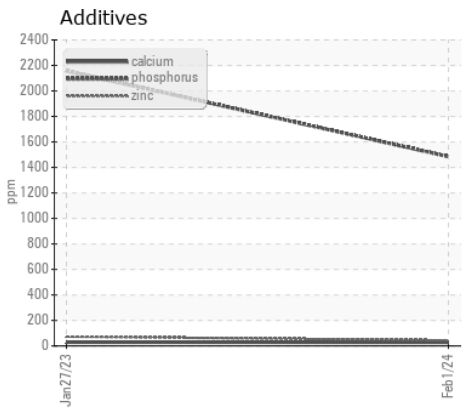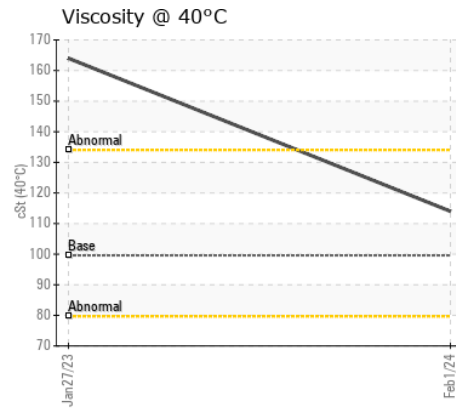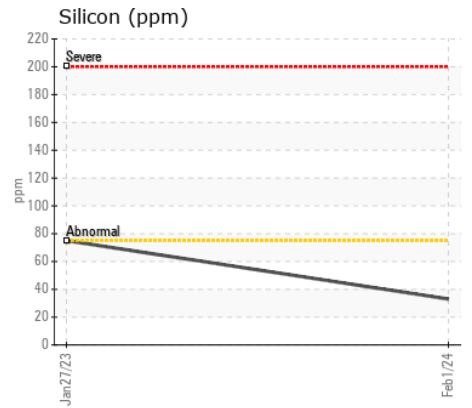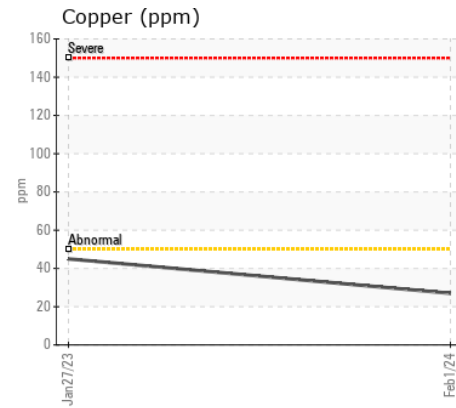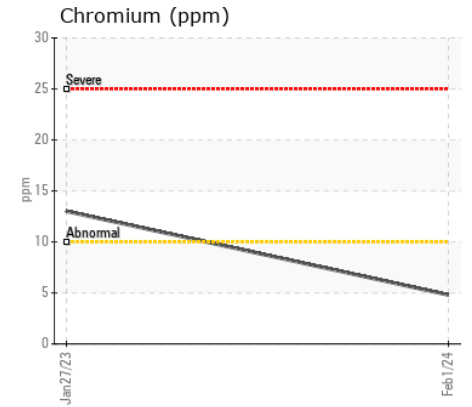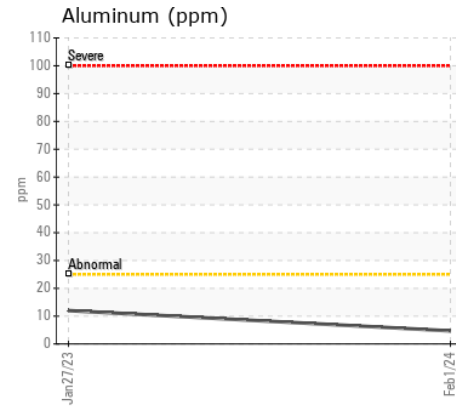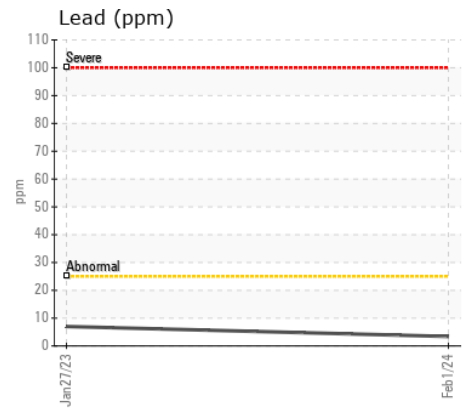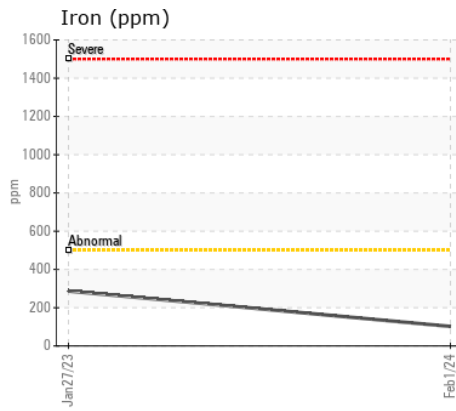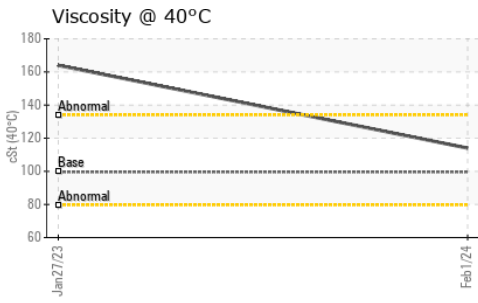

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0281212 **Received** : 16 Feb 2024  
**Lab Number** : 02616318 **Tested** : 16 Feb 2024  
**Unique Number** : 5733428 **Diagnosed** : 16 Feb 2024 - Wes Davis  
**Test Package** : MOB 1

**ABC RECYCLING**  
 8081 MEADOW AVE.  
 BURNABY, BC  
 CA V3N 2V9  
 Contact: John Anderson  
 john.anderson@abcrcycling.com  
 T: (778)988-9944  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.