



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR LH30M 142539-1253**

Component  
**Front Left Wheel Hub**

Fluid  
**PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0284083</b>	LH0260404	LH0260652
Sample Date		Client Info		<b>15 Feb 2024</b>	17 Aug 2023	03 May 2023
Machine Age	hrs	Client Info		<b>0</b>	1138	732
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>450	<b>18</b>	9	12
Chromium	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	1
Lead	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>75	<b>2</b>	6	9
Tin	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	VLITE	VLITE
Yellow Metal	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	<b>2</b>	2	5
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	VLITE	VLITE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	6	21
Boron	ppm	ASTM D5185(m)	328	<b>294</b>	256	100
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1	<b>1</b>	4	10
Calcium	ppm	ASTM D5185(m)	7	<b>99</b>	614	3817
Phosphorus	ppm	ASTM D5185(m)	1145	<b>1251</b>	1280	1258
Zinc	ppm	ASTM D5185(m)	3	<b>56</b>	283	1462
Sulfur	ppm	ASTM D5185(m)	17909	<b>20551</b>	17912	3178
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	<b>104</b>	96.9	64.9

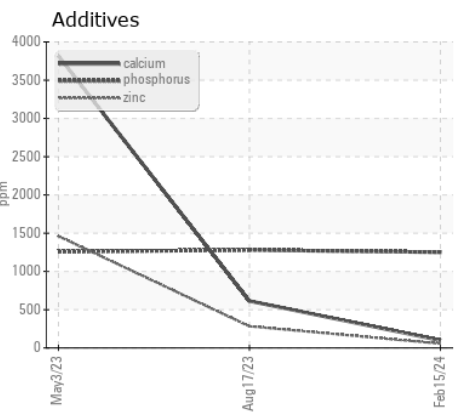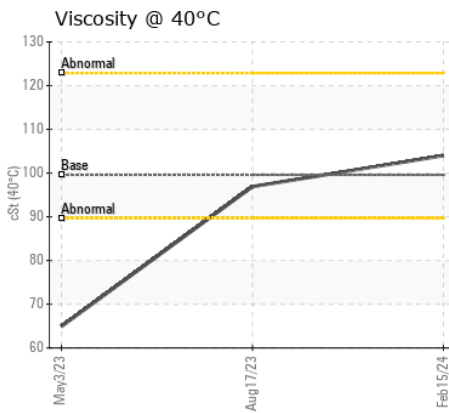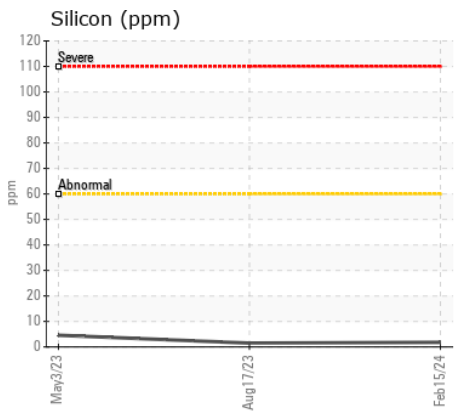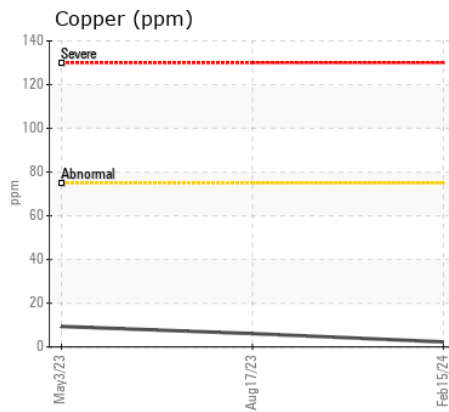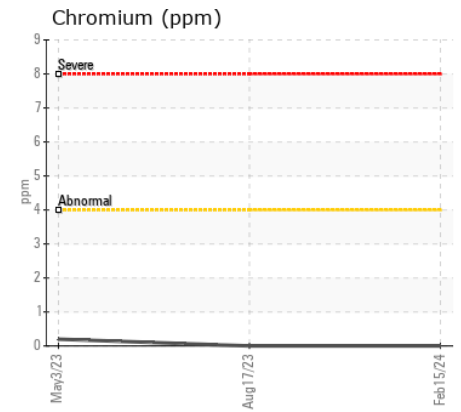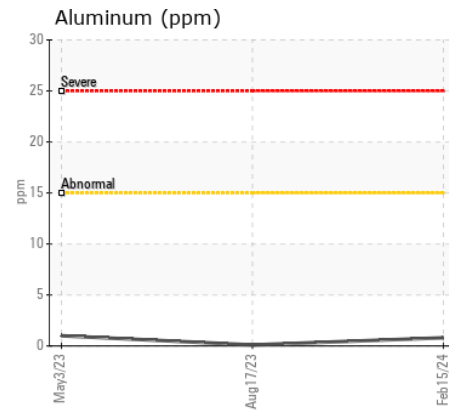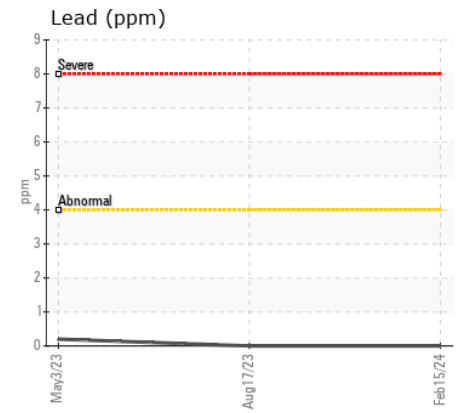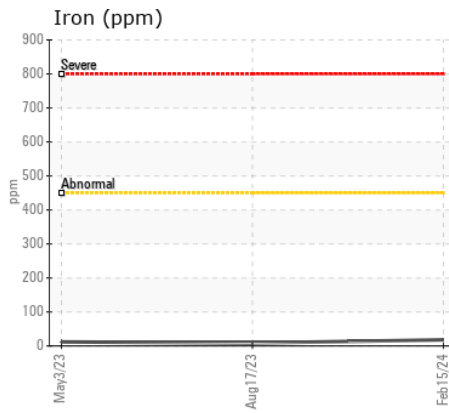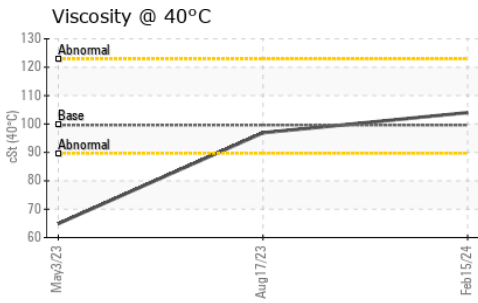

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0284083  
**Lab Number** : 02616331  
**Unique Number** : 5733441  
**Test Package** : MOB 1  
**Received** : 16 Feb 2024  
**Tested** : 16 Feb 2024  
**Diagnosed** : 16 Feb 2024 - Wes Davis

**Goodies Trading Ltd.**  
 8150 Aitken Road  
 Chilliwack, BC  
 CA V2R 4H5  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: