



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A25D 7706 (S/N A250U5577)
Component
Center Right Final Drive
Fluid
PETRO CANADA TRAXON 80W90 (5 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0075757	PC0069181	PC426619
Sample Date		Client Info		08 Jan 2024	12 Apr 2023	17 Aug 2018
Machine Age	hrs	Client Info		16946	15779	10856
Oil Age	hrs	Client Info		0	1000	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>900	53	50	43
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	<1	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>30	3	3	<1
Lead	ppm	ASTM D5185(m)	>50	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>150	6	5	3
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	15	18	10
Potassium	ppm	ASTM D5185(m)	>20	2	1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	VLITE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	1	1
Boron	ppm	ASTM D5185(m)	243	243	252	229
Barium	ppm	ASTM D5185(m)	1	0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	<1
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)	2	3	3	2
Calcium	ppm	ASTM D5185(m)	6	23	17	25
Phosphorus	ppm	ASTM D5185(m)	987	983	1088	1022
Zinc	ppm	ASTM D5185(m)	1	12	9	20
Sulfur	ppm	ASTM D5185(m)	21530	17920	18967	24281
Visc @ 40°C	cSt	ASTM D7279(m)	141.0	139	140	129
Visc @ 100°C	cSt	ASTM D7279(m)	15.06	14.7	14.7	14.1
Viscosity Index (VI)	Scale	ASTM D2270*	108	105	104	107

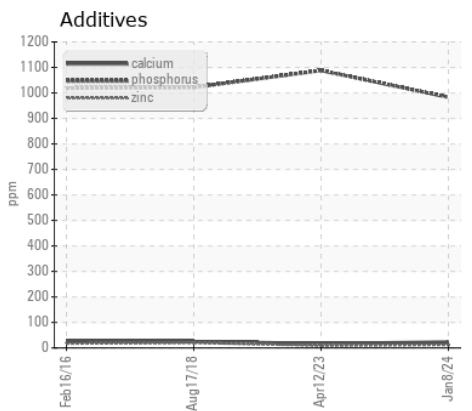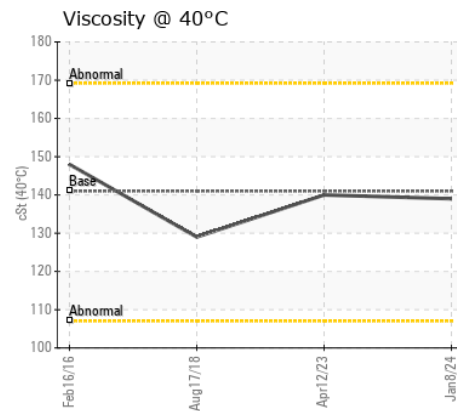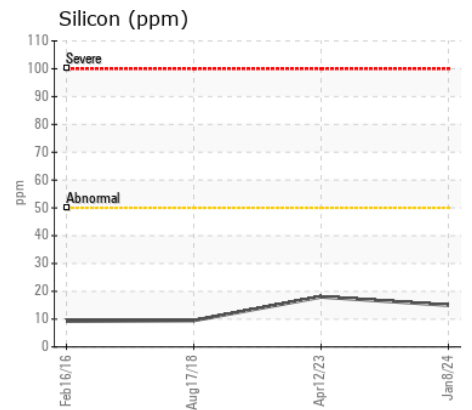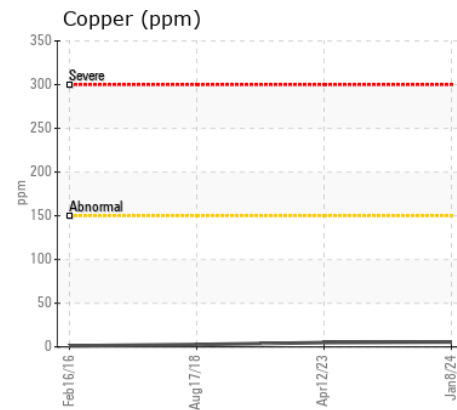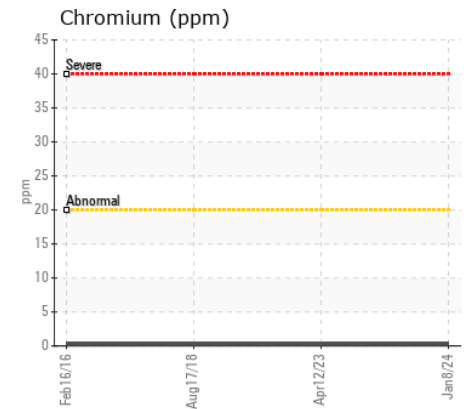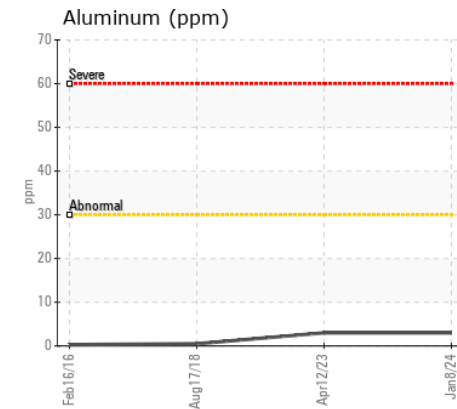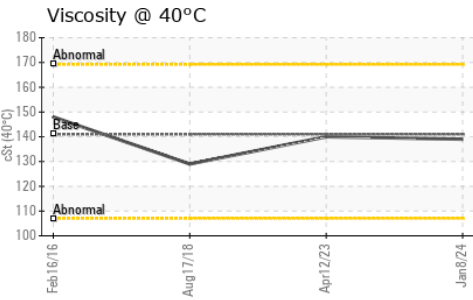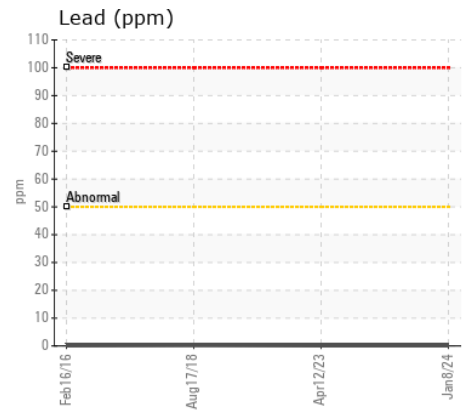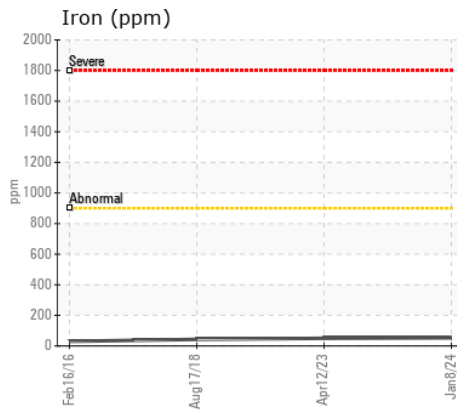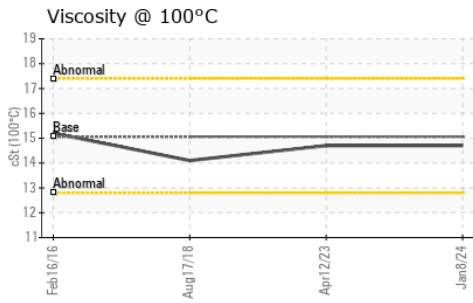

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0075757 **Received** : 16 Feb 2024
Lab Number : 02616338 **Tested** : 16 Feb 2024
Unique Number : 5733448 **Diagnosed** : 16 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV100, VI)

TRUCK AND EQUIPMENT SOLUTION
 2 BERTRAM INDUSTRIAL PKWY.
 MIDHURST, ON
 CA L9X 1L2
 Contact: Julie Holden
 parts@tesbarrie.com
 T: (705)792-7620
 F: (705)725-5425

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.