



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A25D 7706 (S/N A250U5577)
Component
Front Center Final Drive
Fluid
PETRO CANADA TRAXON 80W90 (5 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0067885	---	---
Sample Date		Client Info		08 Jan 2024	---	---
Machine Age	hrs	Client Info		16946	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>900	52	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>30	3	---	---
Lead	ppm	ASTM D5185(m)	>50	<1	---	---
Copper	ppm	ASTM D5185(m)	>150	5	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	14	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)	243	245	---	---
Barium	ppm	ASTM D5185(m)	1	<1	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	2	3	---	---
Calcium	ppm	ASTM D5185(m)	6	23	---	---
Phosphorus	ppm	ASTM D5185(m)	987	990	---	---
Zinc	ppm	ASTM D5185(m)	1	12	---	---
Sulfur	ppm	ASTM D5185(m)	21530	18415	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	141.0	139	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.06	14.7	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	108	105	---	---

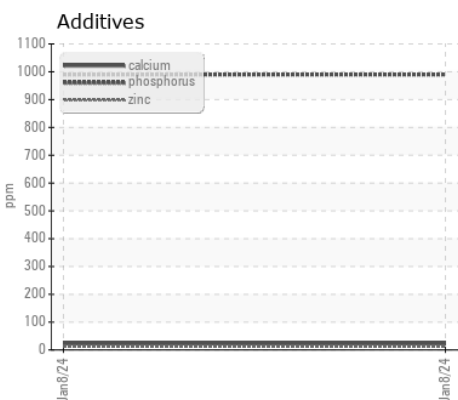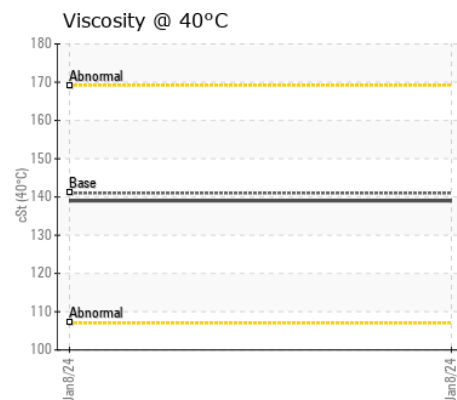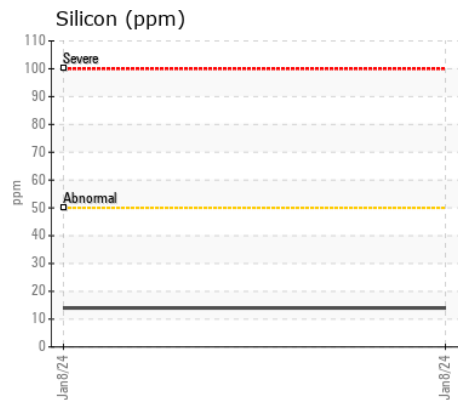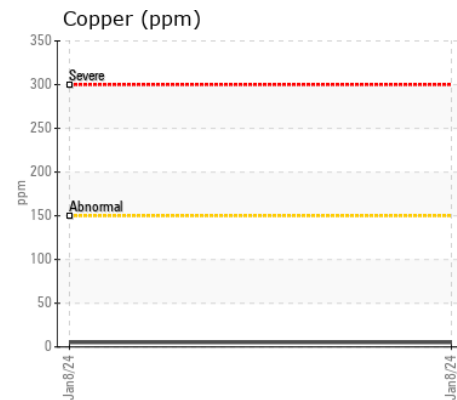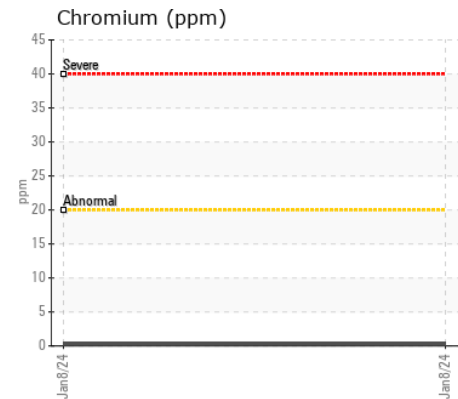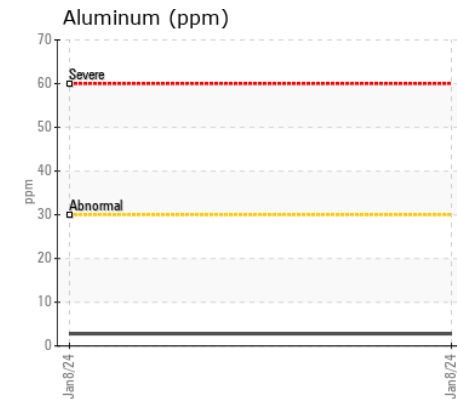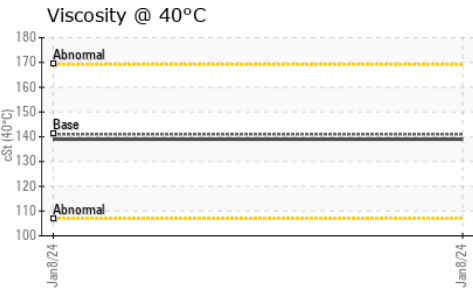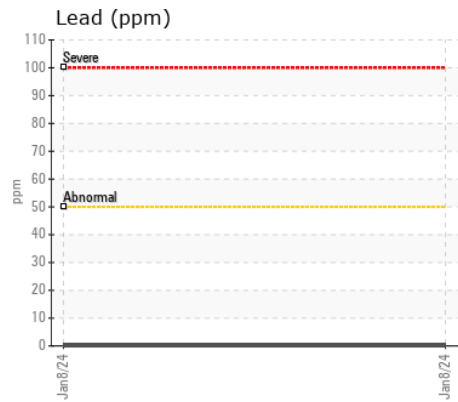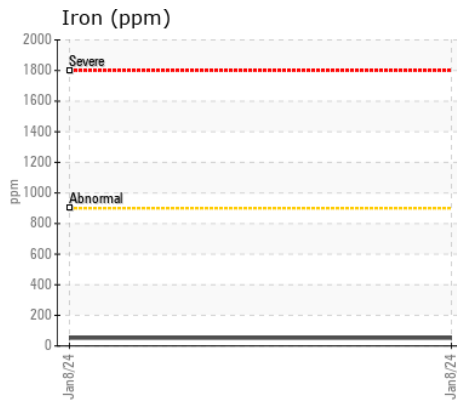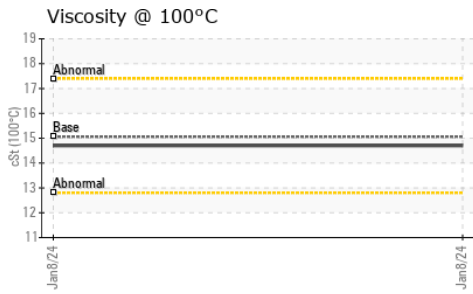

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0067885 **Received** : 16 Feb 2024
Lab Number : 02616340 **Tested** : 16 Feb 2024
Unique Number : 5733450 **Diagnosed** : 16 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV100, VI)

TRUCK AND EQUIPMENT SOLUTION
 2 BERTRAM INDUSTRIAL PKWY.
 MIDHURST, ON
 CA L9X 1L2
 Contact: Julie Holden
 parts@tesbarrie.com
 T: (705)792-7620
 F: (705)725-5425

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.