



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO A25D 7706 (S/N A250U5577)**  
Component  
**Front Right Final Drive**  
Fluid  
**PETRO CANADA TRAXON 80W90 (5 LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PC0075115</b>	PC0069180	PC0051473
Sample Date		Client Info		<b>08 Jan 2024</b>	12 Apr 2023	07 Sep 2021
Machine Age	hrs	Client Info		<b>16946</b>	15779	14295
Oil Age	hrs	Client Info		<b>0</b>	1000	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Not Changed</b>	N/A	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>900	<b>23</b>	22	64
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>50	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185(m)	>150	<b>2</b>	1	4
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	<b>5</b>	6	9
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Debris	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Boron	ppm	ASTM D5185(m)	243	<b>248</b>	255	237
Barium	ppm	ASTM D5185(m)	1	<b>&lt;1</b>	0	5
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185(m)	2	<b>2</b>	<1	2
Calcium	ppm	ASTM D5185(m)	6	<b>31</b>	4	27
Phosphorus	ppm	ASTM D5185(m)	987	<b>997</b>	1089	1103
Zinc	ppm	ASTM D5185(m)	1	<b>15</b>	5	23
Sulfur	ppm	ASTM D5185(m)	21530	<b>18206</b>	18551	24380
Visc @ 40°C	cSt	ASTM D7279(m)	141.0	<b>141</b>	142	145
Visc @ 100°C	cSt	ASTM D7279(m)	15.06	<b>14.8</b>	14.9	15.0
Viscosity Index (VI)	Scale	ASTM D2270*	108	<b>104</b>	105	103

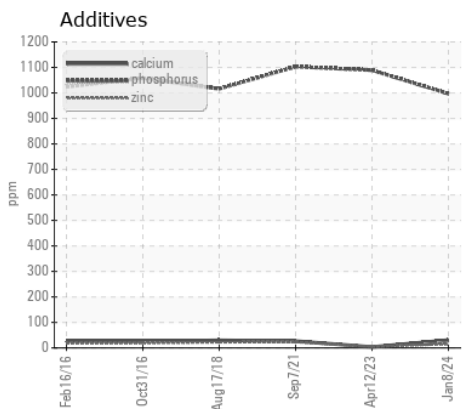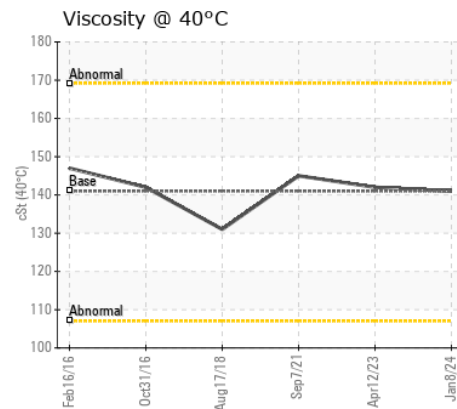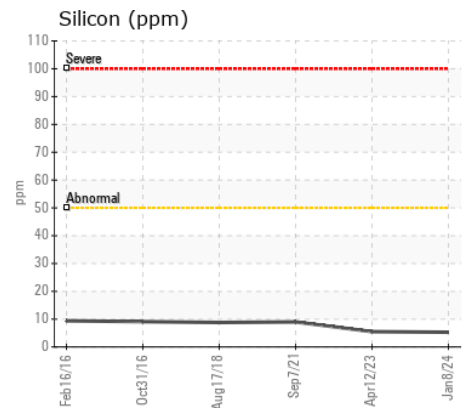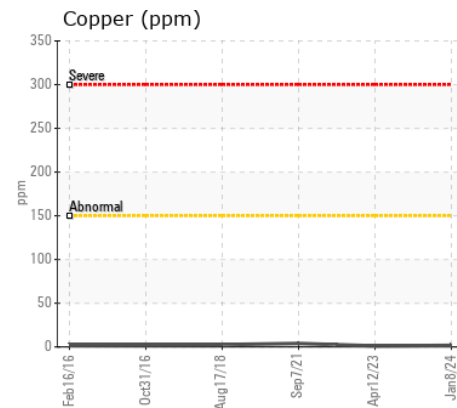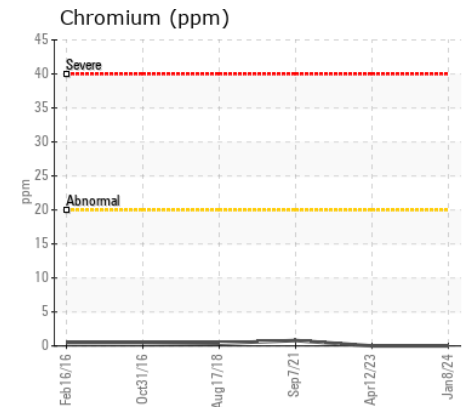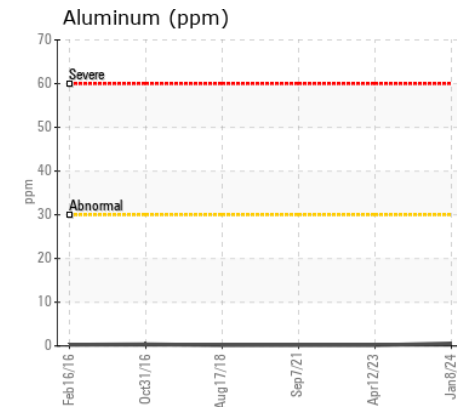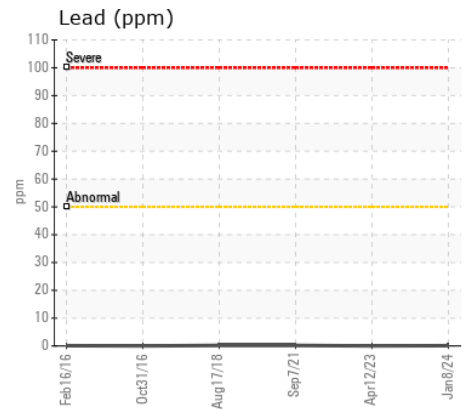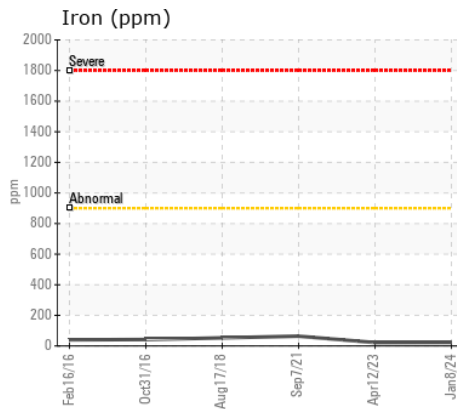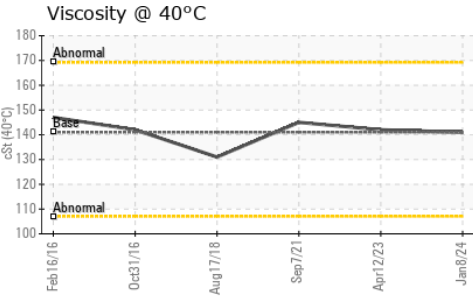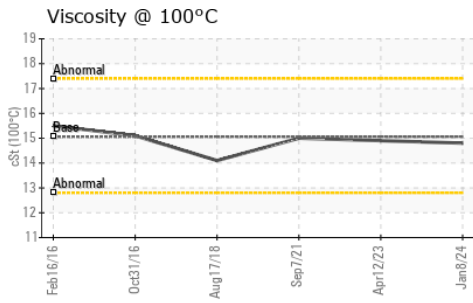

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0075115 **Received** : 16 Feb 2024  
**Lab Number** : 02616342 **Tested** : 16 Feb 2024  
**Unique Number** : 5733452 **Diagnosed** : 16 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )

**TRUCK AND EQUIPMENT SOLUTION**  
 2 BERTRAM INDUSTRIAL PKWY.  
 MIDHURST, ON  
 CA L9X 1L2  
 Contact: Julie Holden  
 parts@tesbarrie.com  
 T: (705)792-7620  
 F: (705)725-5425

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.