



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
NEW HOLLAND T8.330 2BRC05724

Component
Diesel Engine

Fluid
SHELL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0631034	---	---
Sample Date		Client Info		12 Feb 2024	---	---
Machine Age	hrs	Client Info		2911	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	11	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	4	---	---
Lead	ppm	ASTM D5185(m)	>40	<1	---	---
Copper	ppm	ASTM D5185(m)	>330	5	---	---
Tin	ppm	ASTM D5185(m)	>15	2	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











Test for glycol is negative. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	7	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.3	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.7	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>150	7	---	---
Boron	ppm	ASTM D5185(m)		101	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		94	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		109	---	---
Calcium	ppm	ASTM D5185(m)		2199	---	---
Phosphorus	ppm	ASTM D5185(m)		1090	---	---
Zinc	ppm	ASTM D5185(m)		1252	---	---
Sulfur	ppm	ASTM D5185(m)		3484	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.4	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		13.6	---	---

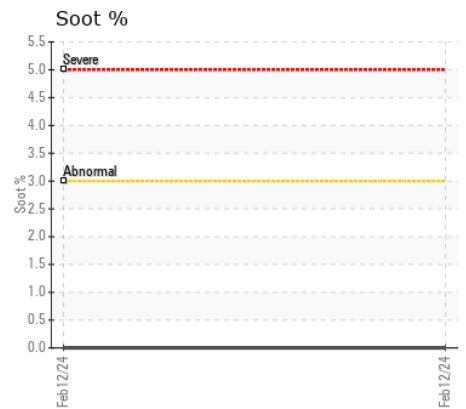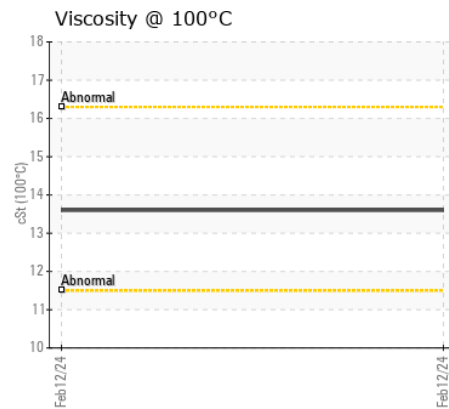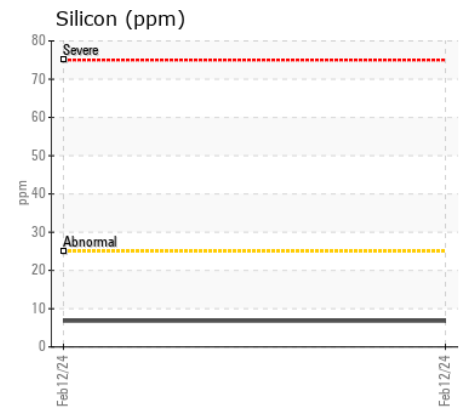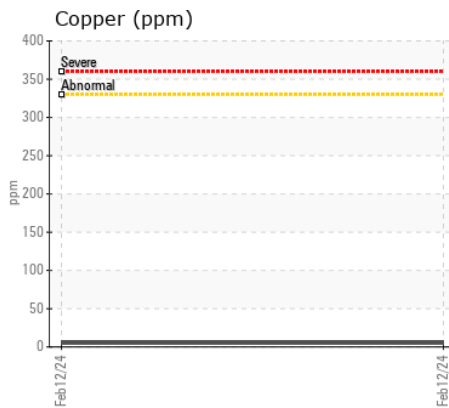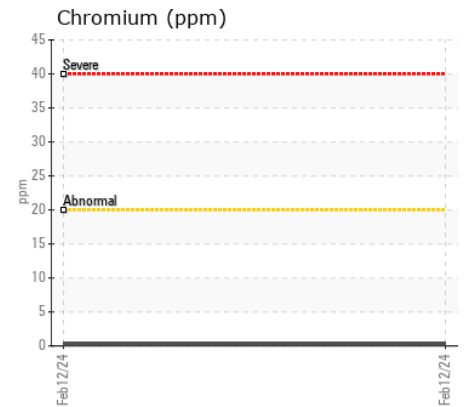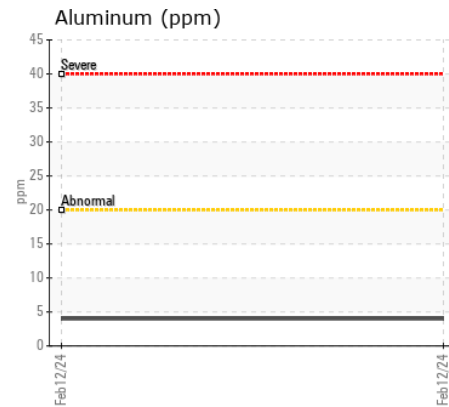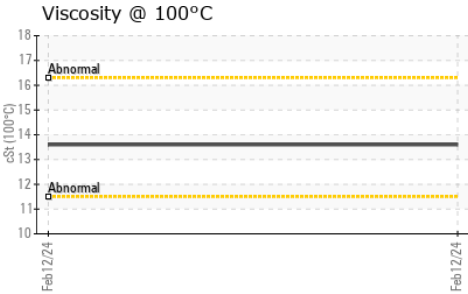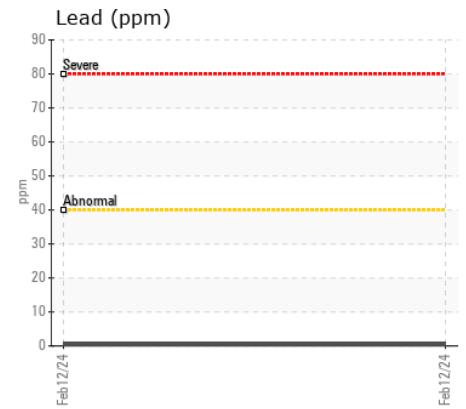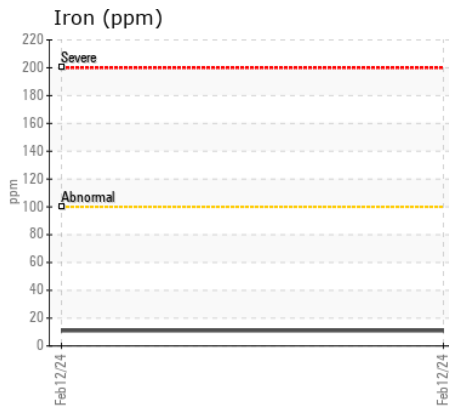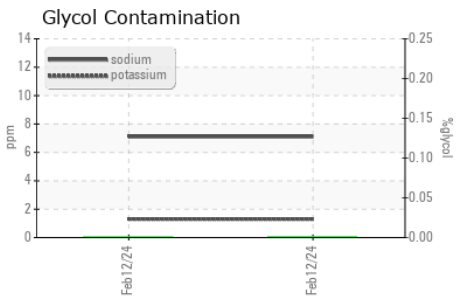

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0631034 **Received** : 20 Feb 2024
Lab Number : 02616529 **Tested** : 20 Feb 2024
Unique Number : 5733639 **Diagnosed** : 21 Feb 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Glycol, Visual)

ONEIDA TRUCK & TRAILER LTD.
 634 4TH LINE
 CALEDONIA, ON
 CA N3W 2B3
 Contact: Bernard Nleberg
 bernard@oneidanewholland.com
 T: (905)765-5011
 F: (905)765-5842

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.