



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
514037
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0108179	---	---
Sample Date		Client Info		15 Feb 2024	---	---
Machine Age	kms	Client Info		112579	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>120	59	---	---
Chromium	ppm	ASTM D5185(m)	>20	2	---	---
Nickel	ppm	ASTM D5185(m)	>5	3	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	16	---	---
Lead	ppm	ASTM D5185(m)	>40	4	---	---
Copper	ppm	ASTM D5185(m)	>330	176	---	---
Tin	ppm	ASTM D5185(m)	>15	3	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION










Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	16	---	---
Potassium	ppm	ASTM D5185(m)	>20	34	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>4	1.1	---	---
Nitration	Abs/cm	ASTM D7624*	>20	12.2	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	25.2	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)	250	4	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	100	70	---	---
Manganese	ppm	ASTM D5185(m)		1	---	---
Magnesium	ppm	ASTM D5185(m)	450	943	---	---
Calcium	ppm	ASTM D5185(m)	3000	1206	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	895	---	---
Zinc	ppm	ASTM D5185(m)	1350	1122	---	---
Sulfur	ppm	ASTM D5185(m)	4250	1955	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.8	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	10.9	---	---

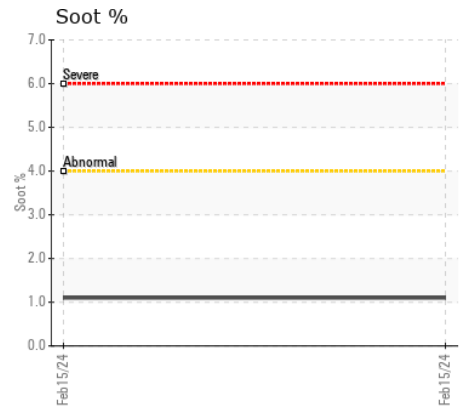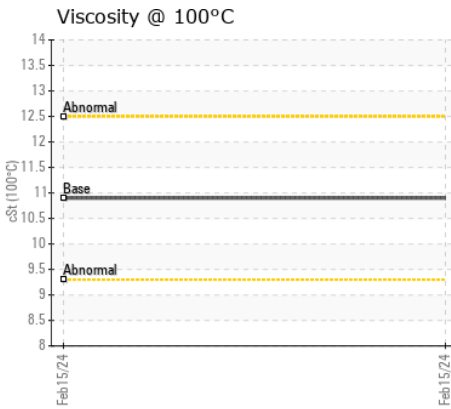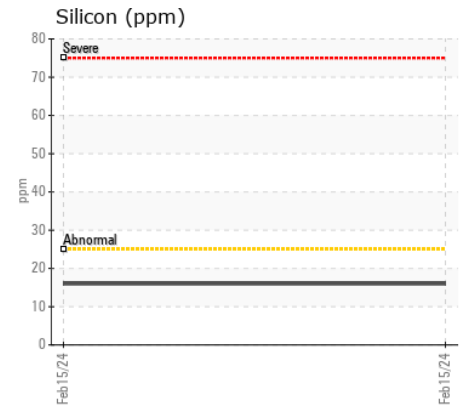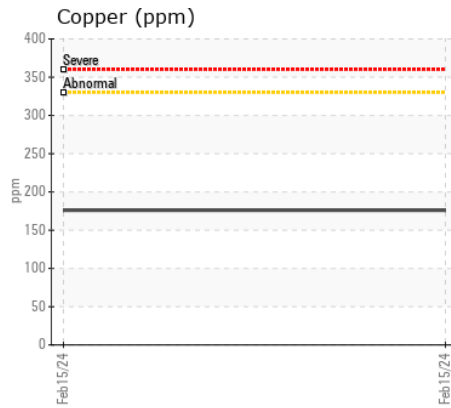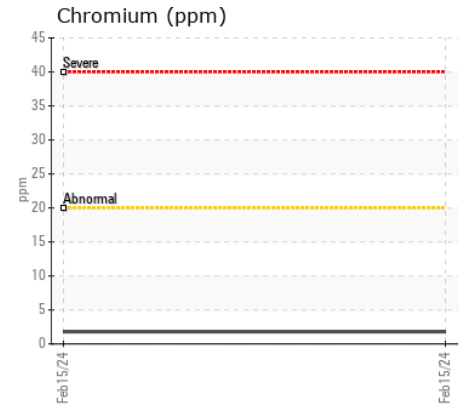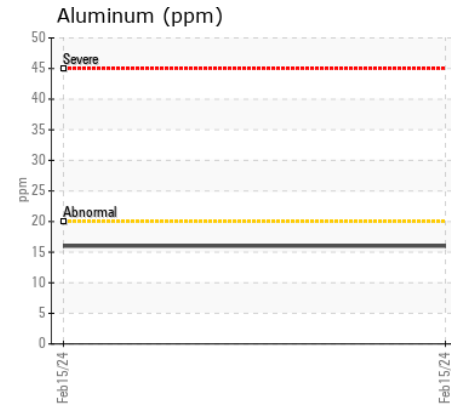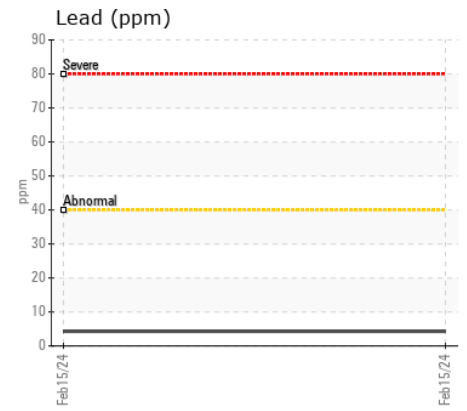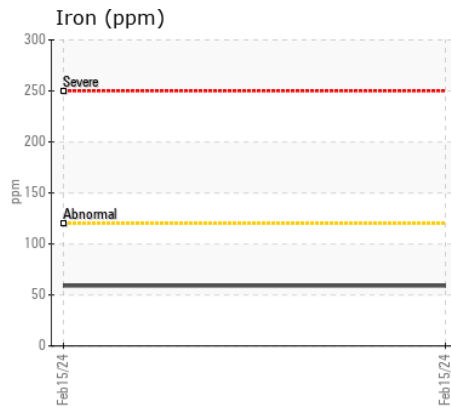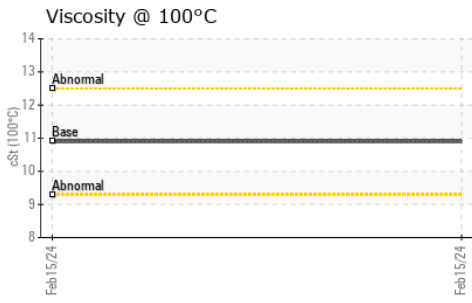

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0108179 **Received** : 20 Feb 2024
Lab Number : 02616593 **Tested** : 20 Feb 2024
Unique Number : 5733703 **Diagnosed** : 20 Feb 2024 - Wes Davis
Test Package : MOB 1

GFL Environmental - 245 - BJ Bear
 2616 Cedar Creek Road
 Ayr, ON
 CA N0B 1E0
 Contact: Erik Prpic
 eprpic@gflenv.com
 T: (519)570-9000
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.