



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(CFAQR)
Machine Id
[CFAQR] PA31-350 L-5368-61A
Component
Left Piston Aircraft Engine
Fluid
PHILLIPS 66 AVIATION X/C OIL SAE20W50 (14 LTR)

RECOMMENDATION

We advise that you check the engine tuning and timing. We advise that you check for excessive valve and valve guide clearance. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0838449	WC0754570	WC0826681
Sample Date		Client Info		12 Feb 2024	27 Oct 2023	22 Aug 2023
TSN	hrs	Client Info		0	0	0
TSO	hrs	Client Info		3445	3255	3086
Oil Age	hrs	Client Info		51	52	41
Filter Age	hrs	Client Info		51	52	41
Oil Changed		Client Info		Changed	Changed	Not Changd
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

Nickel ppm levels are abnormal. Exhaust valve wear is indicated.

Iron	ppm	ASTM D5185(m)	>90	56	48	42
Chromium	ppm	ASTM D5185(m)	>20	15	10	10
Nickel	ppm	ASTM D5185(m)	>15	▲ 20	14	13
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>5	<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>25	8	4	4
Lead	ppm	ASTM D5185(m)	>20000	8460	6054	5787
Copper	ppm	ASTM D5185(m)	>25	8	5	5
Tin	ppm	ASTM D5185(m)	>30	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	7	6	5
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Silt	scalar	Visual*	NONE	VLITE	NONE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	WGOIL	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	.2%	NEG

FLUID CONDITION

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185(m)		0	<1	<1
Boron	ppm	ASTM D5185(m)	0.0	0	0	0
Barium	ppm	ASTM D5185(m)	0.0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0.0	0	0	0
Manganese	ppm	ASTM D5185(m)	0.0	0	0	0
Magnesium	ppm	ASTM D5185(m)	0.0	6	3	2
Calcium	ppm	ASTM D5185(m)	4.7	1	4	<1
Phosphorus	ppm	ASTM D5185(m)	0.0	0	1	0
Zinc	ppm	ASTM D5185(m)	0.1	2	4	3
Sulfur	ppm	ASTM D5185(m)	848	1085	865	980
Visc @ 100°C	cSt	ASTM D7279(m)	20.2	21.7	21.2	22.9

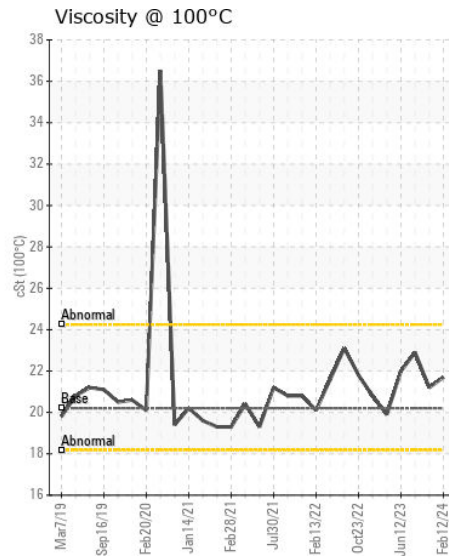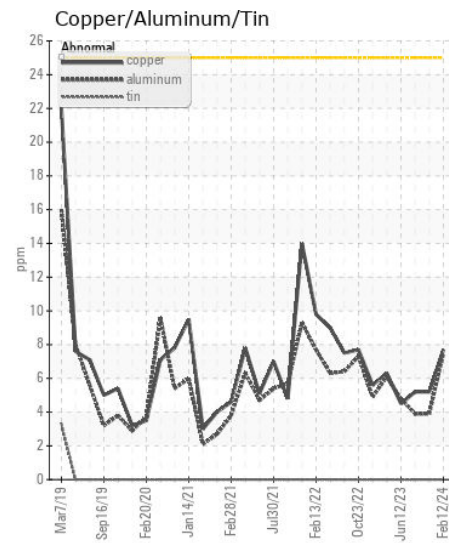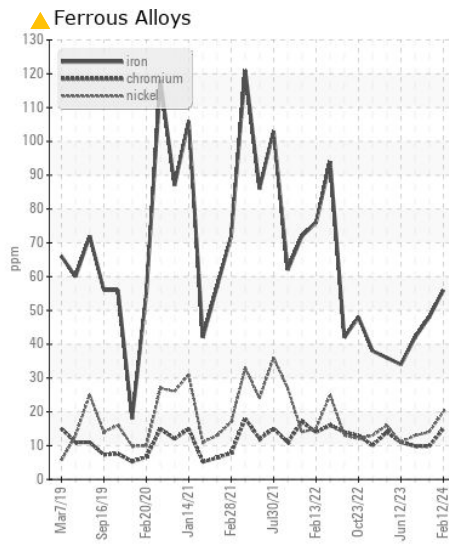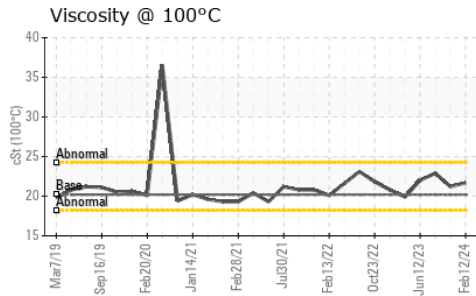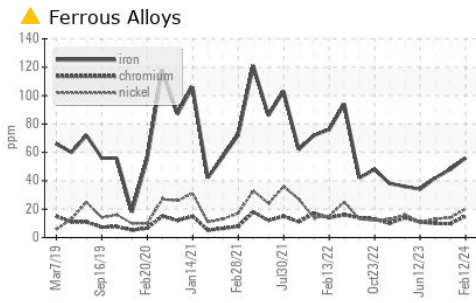

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0838449
Lab Number : 02616634
Unique Number : 5733744
Test Package : AVI 1
Received : 20 Feb 2024
Tested : 20 Feb 2024
Diagnosed : 20 Feb 2024 - Kevin Marson

SKYCAR AIR AMBULANCE
 BOX 289, 17 AIRPORT ROAD
 SIOUX LOOKOUT, ON
 CA P8T 1A3
 Contact: Jason Murphy
 prm@skycare.ca
 T: (807)737-0039
 F: (807)737-0040

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.