



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>ABNORMAL</b>

Machine Id  
**10003**  
Component  
**Transmission**  
Fluid  
**SAE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0890734</b>	---	---
Sample Date		Client Info		<b>09 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>5990</b>	---	---
Oil Age	hrs	Client Info		<b>1990</b>	---	---
Filter Age	hrs	Client Info		<b>1990</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	<b>170</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>50	<b>6</b>	---	---
Lead	ppm	ASTM D5185(m)	>50	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>200	<b>10</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

## CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>50	<b>13</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	---	---

## FLUID CONDITION

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>57	<b>3</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>72</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>29</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>577</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>1558</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>980</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>1017</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2976</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	115	<b>▲ 67.3</b>	---	---

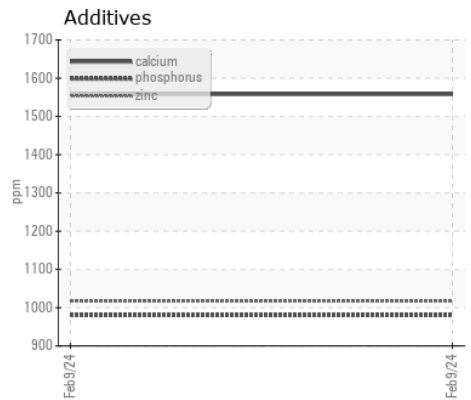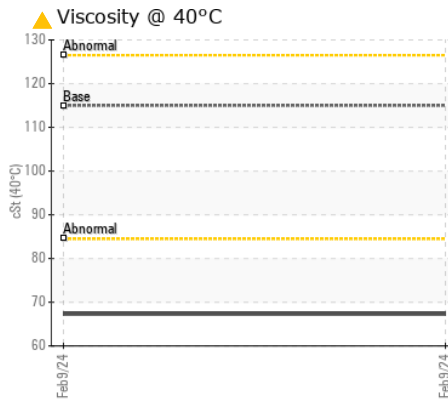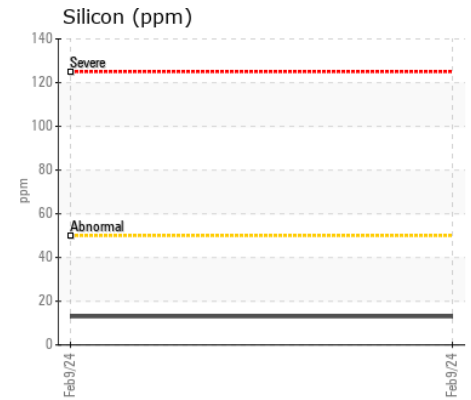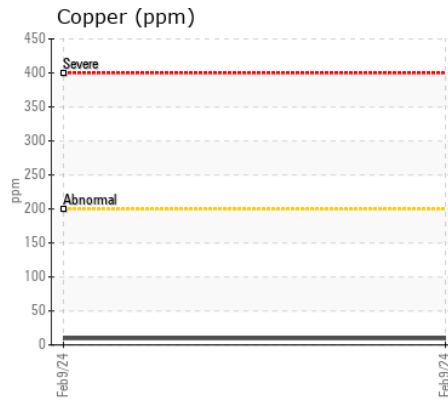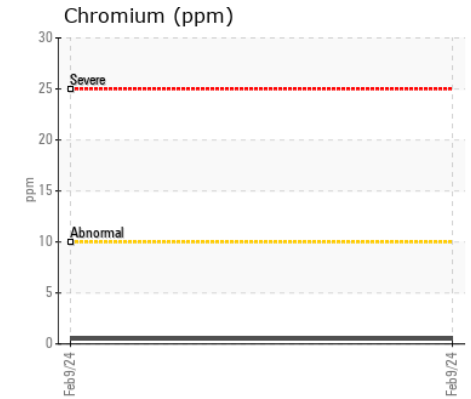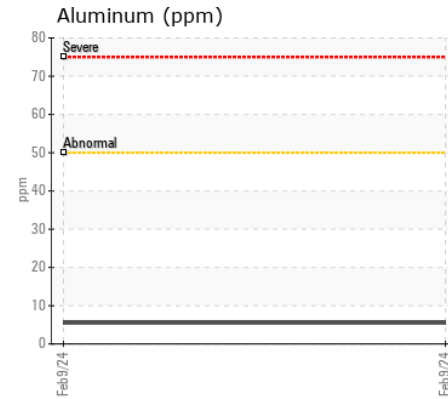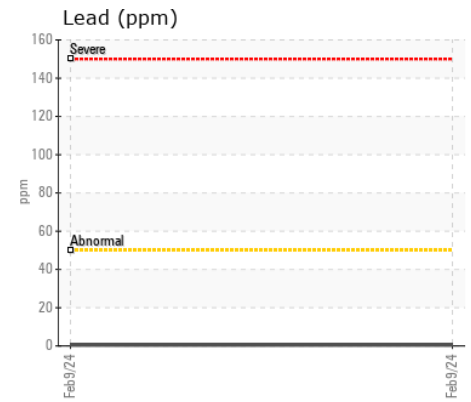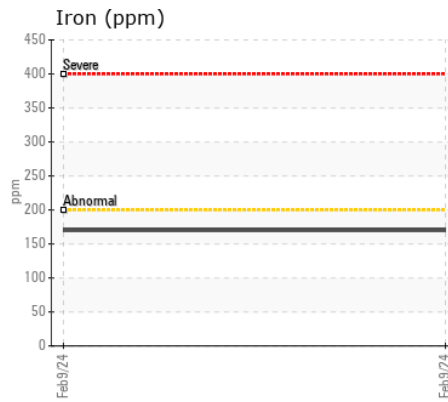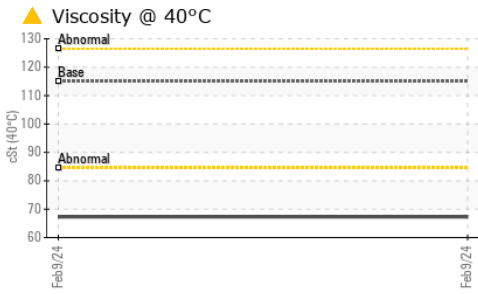

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0890734  
**Lab Number** : 02616698  
**Unique Number** : 5733808  
**Test Package** : MOB 1  
**Received** : 20 Feb 2024  
**Tested** : 20 Feb 2024  
**Diagnosed** : 20 Feb 2024 - Kevin Marson

**C.G. EQUIPMENT**  
 7367 Wellington Rd. 30, Unit A  
 Guelph, ON  
 CA N0M 2T0  
 Contact: CG Equipment CG Guelph  
 cory@cgequipment.com  
 T: (519)826-0550  
 F: (519)837-2055

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.