



Machine Id
712025
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (40 LTR)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0107360	GFL0076612	GFL0059945
Sample Date		Client Info		19 Feb 2024	07 Sep 2023	26 Jan 2023
Machine Age	hrs	Client Info		3471	2970	1985
Oil Age	hrs	Client Info		600	600	600
Filter Age	hrs	Client Info		600	600	600
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>120	10	7	15
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	0	2
Titanium	ppm	ASTM D5185(m)	>2	0	<1	<1
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	3	2	3
Lead	ppm	ASTM D5185(m)	>40	<1	<1	1
Copper	ppm	ASTM D5185(m)	>330	2	3	41
Tin	ppm	ASTM D5185(m)	>15	<1	<1	1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>25	3	3	5
Potassium	ppm	ASTM D5185(m)	>20	6	6	7
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.1	0	0
Nitration	Abs/cm	ASTM D7624*	>20	7.5	6.5	8.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.3	19.2	21.2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		3	3	4
Boron	ppm	ASTM D5185(m)	2	2	3	6
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	58	56	59
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	953	972	972
Calcium	ppm	ASTM D5185(m)	1050	1088	1029	1092
Phosphorus	ppm	ASTM D5185(m)	995	995	1008	1038
Zinc	ppm	ASTM D5185(m)	1180	1164	1168	1179
Sulfur	ppm	ASTM D5185(m)	2600	2573	2430	2334
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.3	13.0	16.2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.3	11.1	11.2

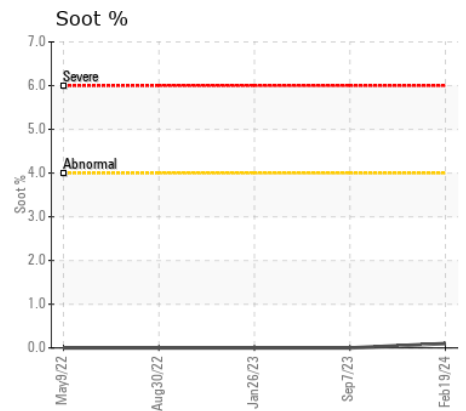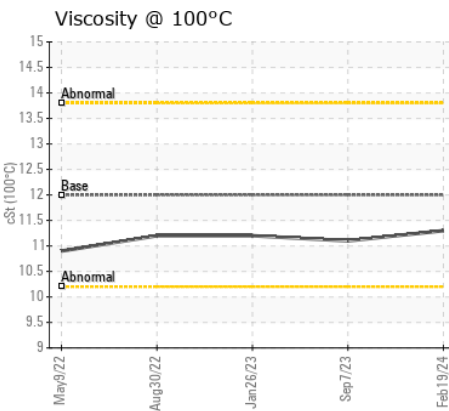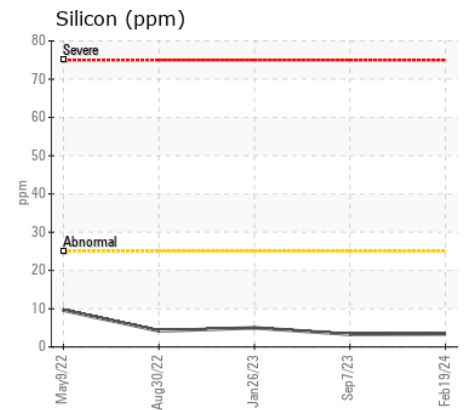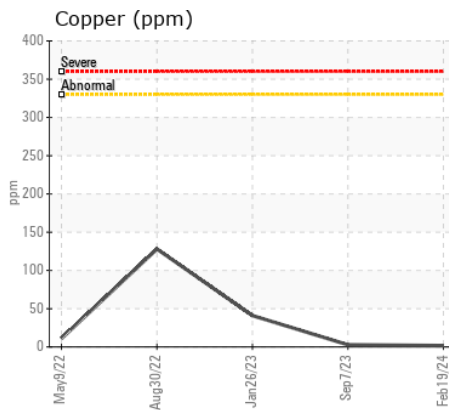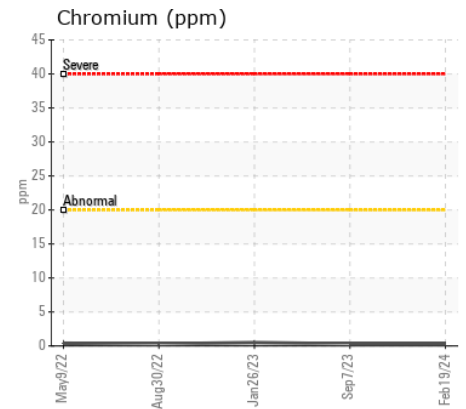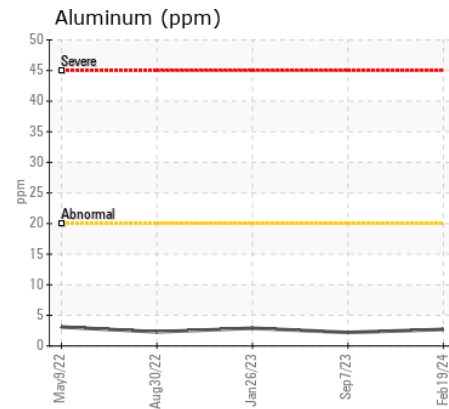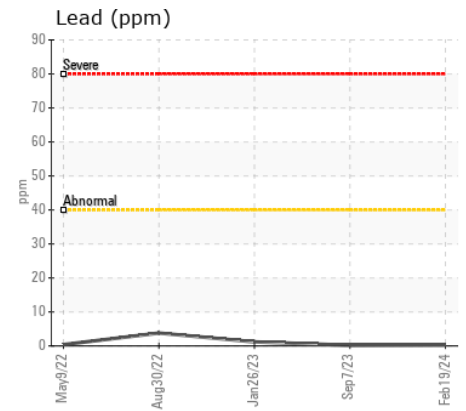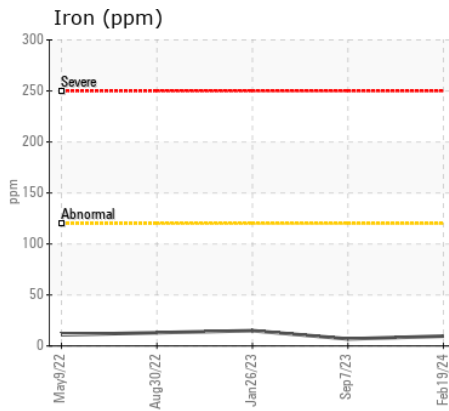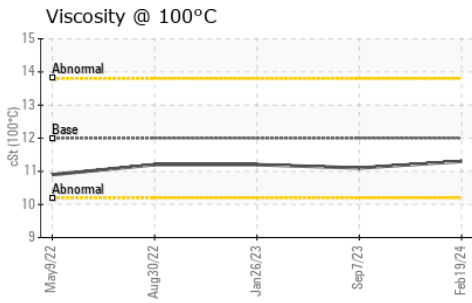

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0107360
Lab Number : 02616885
Unique Number : 5733995
Test Package : MOB 1
Received : 21 Feb 2024
Tested : 21 Feb 2024
Diagnosed : 21 Feb 2024 - Wes Davis

GFL Environmental - 731STOK - Stoke Hauling
 286 Chemin Cote
 Stoke, QC
 CA J0B 3G0
 Contact: Robert Sayers
 rsayers@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: